


FLPL600-40

FibreLED recessed Ceiling Panel offers direct replacement for traditional 4x18Watt modular fitting. Non-Glare diffused face offering clean, consistent panel of illumination. Up to 50,000hrs average lamp life. FLPL600-40 is a modern maintenance free, highly efficient alternative to fluorescent ceiling fittings.



| Model | LED Colour | Dimensions WxLxH (mm) | Power Consumption (W) | Total Lumen (lm) | CCT | CRI (Ra) |
|-------------|---------------|-----------------------|-----------------------|------------------|-------|----------|
| FLPL600-40C | Cool White | 600x600x75 | 40 | 2400 | 6000K | 70 |
| FLPL600-40N | Neutral White | 600x600x75 | 40 | 2300 | 4000K | 69 |
| FLPL600-40W | Warm White | 600x600x75 | 40 | 2200 | 2800K | 67 |

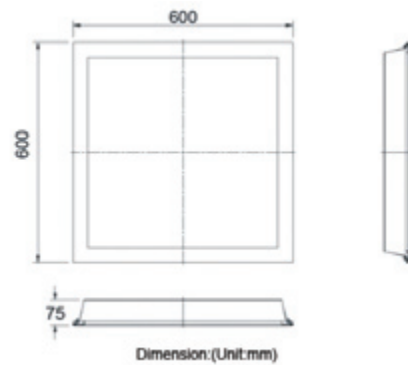

Features:

- High Efficiency 40W Total Consumption
- 500 Pieces SMD LED High Output Chip
- PMMA Optical Diffuser
- Can be used for General Lighting, Secondary Lighting as well as traditional lighting applications
- LED Colour Temp - Cool White, Natural White, Warm White
- Certification - RoHS CE
- Dimmable
- Long Life
- Energy Saving