



## FLOODLIGHTS



FLFLD100MA

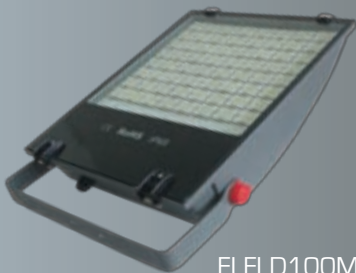

FLFLD10

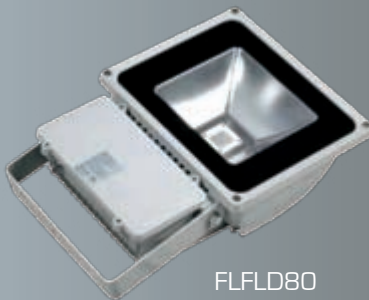

FLFLD80



FLFLD50

### FLOODLIGHT SERIES - FLFLD

LED Flood lights offer up to 80% consumption savings on traditional luminaires, easily installed and retrofitted.

Each luminaire comes complete with integral LED PSU and thermal management system to ensure maximum output and durability. Fittings offer high lumen output with little light wastage and no maintenance.



LED Floods and Streetlights installed in car park  
120W Replaced 1000W - Cavan General Hospital

## FLOODLIGHT SERIES



- Replacement for Metal Halide exterior floods
- Up to 90% Consumption Reduction
- Maintenance Free
- Similar Body/Shape mounting to traditional Metal Halide Luminaires



FFLD-100MA



FFLD-80MA

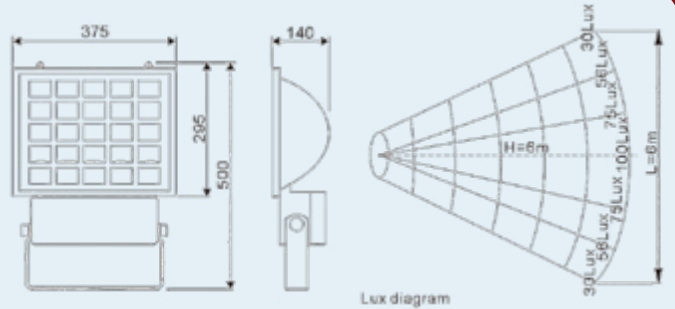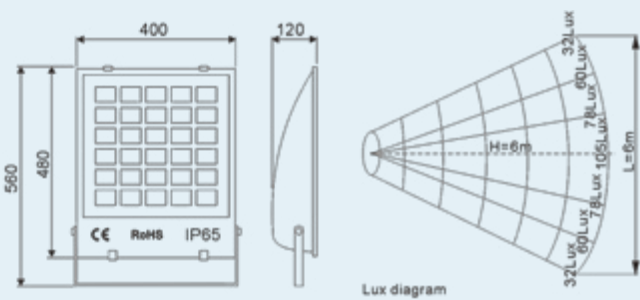

**Wattage:** 100w  
**Lumen Output:** 7500lms  
**Beam Angle:** 170°  
**Colour Ra Index:** 80ra  
**Housing:** Aluminium, Glass Cover  
**Colour Temp:** 3000-4000 warm/5000-6000 cold  
**IP Rating:** IP65  
**Energy Saving:** 80% Consumption Saving  
**Warranty:** 2 years

**Wattage:** 80w  
**Lumen Output:** 6400lms  
**Beam Angle:** 170°  
**Colour Ra Index:** 80ra  
**Housing:** Aluminium, Glass Cover  
**Colour Temp:** 3000-4000 warm/5000-6000 cold  
**IP Rating:** IP65  
**Energy Saving:** 80% Consumption Saving  
**Warranty:** 2 years



## LED FLOODLIGHTS

### FibreLED High Output LED Floodlight Range

- Halogen Replacement
- Metal Halide Replacement
- 50,000hrs Lamp Life
- Up to 90% Consumption Savings against traditional alternative
- IP65 Rated
- Aluminium Body with Wall Bracket
- Integral LED Driver
- Straight to Mains Connection
- High Output 1Watt CREE LED Chip





FLFLD10

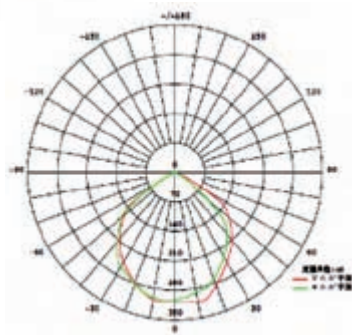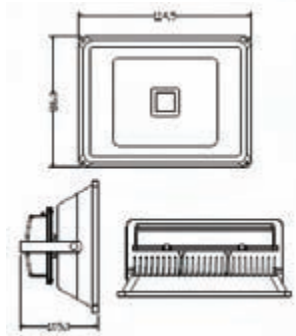

| Voltage      | Wattage | Luminous Flux | IP Level | Colour Temp        |
|--------------|---------|---------------|----------|--------------------|
| 85 - 265V AC | 10W     | 650LM         | IP 65    | PW<br>3900 - 6000K |

CE Approved  
High Output LED Chip  
Aluminium body complete with wall bracket

FLFLD30

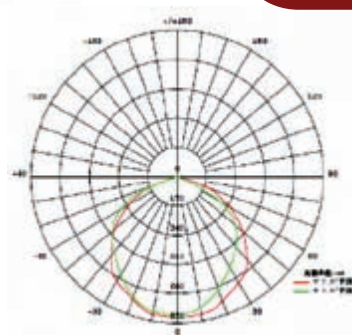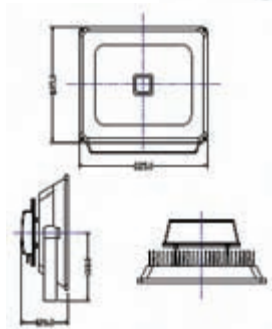



| Voltage      | Wattage | Luminous Flux | IP Level | Colour Temp        |
|--------------|---------|---------------|----------|--------------------|
| 85 - 265V AC | 30W     | 2069LM        | IP 65    | PW<br>3900 - 6000K |

CE Approved  
High Output LED Chip  
Aluminium body complete with wall bracket

FLFLD50

| Voltage      | Wattage | Luminous Flux | IP Level | Colour Temp        |
|--------------|---------|---------------|----------|--------------------|
| 85 - 265V AC | 50W     | 3600LM        | IP 65    | PW<br>3900 - 6000K |



CE Approved  
High Output LED Chip  
Aluminium body complete with wall bracket

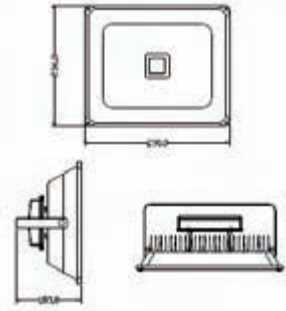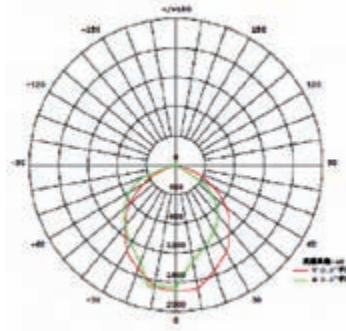

FLFLD60

| Voltage      | Wattage | Luminous Flux | IP Level | Colour Temp        |
|--------------|---------|---------------|----------|--------------------|
| 85 - 265V AC | 60W     | 4069LM        | IP 65    | PW<br>3900 - 6000K |

CE Approved  
High Output LED Chip  
Aluminium body complete with wall bracket

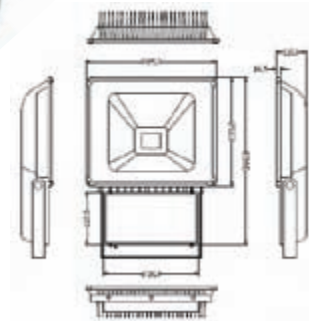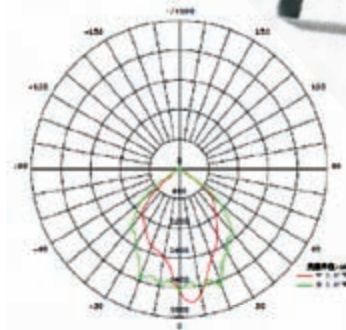

FLFLD80

| Voltage      | Wattage | Luminous Flux | IP Level | Colour Temp        |
|--------------|---------|---------------|----------|--------------------|
| 85 - 265V AC | 80W     | 5878LM        | IP 65    | PW<br>3900 - 6000K |

CE Approved  
High Output LED Chip  
Aluminium body complete with wall bracket

