


B R // G H T[®]
SPECIAL LIGHTING

fibreLED

LED Lighting Specialists

fibreled.com

SPOTLIGHTS

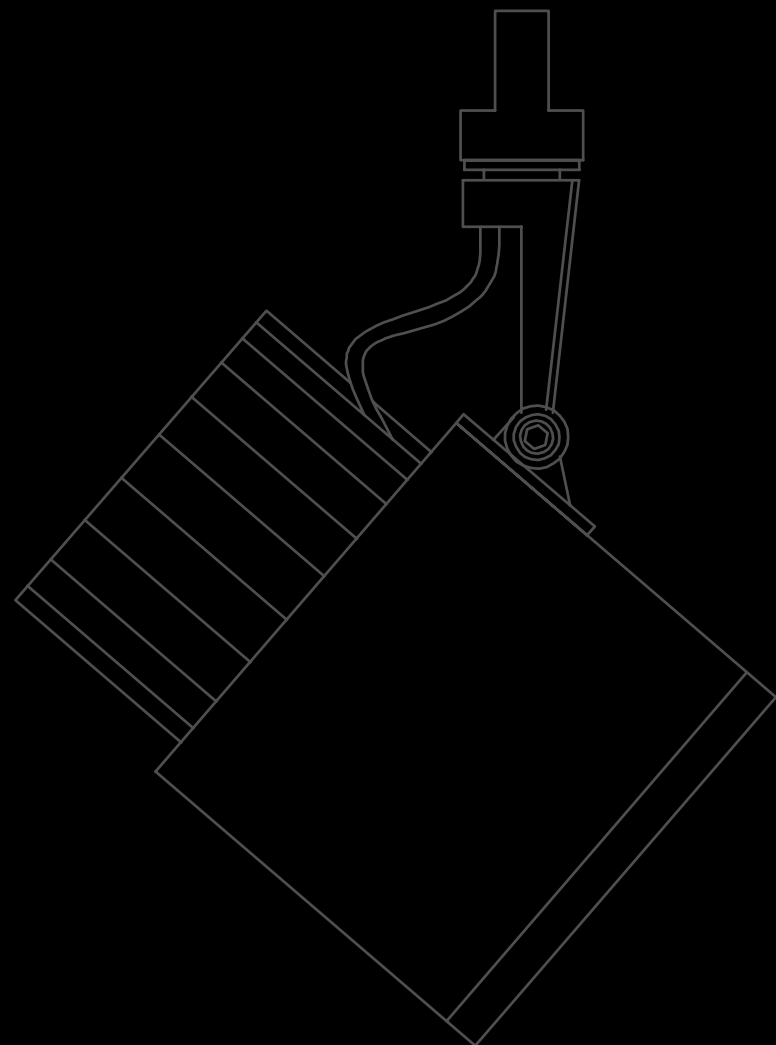


UBER		20-27
VINCO		28-31
PENDO		32-51
POTIS		52-53
SALUS		54-59
TORRIS		60-61
FERUS		62-63
MILES - VENTUS		64-65
VENTUS - CITO		66-67
VERUS-CERTUS		68-69
VICUS-SECTOR		70-71


UBER 1

International Fashion labels can often be recognized as soon as you enter a store, just by their lighting. Local Brands, in contrast, maintain their status against competitors with differentiations in inventive concepts, exquisite quality, individual service and appropriate lighting.


UBER 1 ADTR S.S.LED



UBER 1 Q ADTR S.S.LED




UBER 1 TR S.S.LED



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Diffuser: Glass Lens
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
IP: 40 **IK:** 04

COLORS



OPTIONAL ACCESSORIES




LIGHTING SOURCES

S.S.LED High Output 1200mA

11.7W - 3000K - 350mA - CRI80 - 1975Lm - 168Lm/W / CRI90 - 1690Lm - 144Lm/W
11.7W - 4000K - 350mA - CRI80 - 2075Lm - 178Lm/W / CRI90 - 1780Lm - 151Lm/W
17.1W - 3000K - 500mA - CRI80 - 2735Lm - 160Lm/W / CRI90 - 2345Lm - 138Lm/W
17.1W - 4000K - 500mA - CRI80 - 2870Lm - 168Lm/W / CRI90 - 2460Lm - 144Lm/W
24.5W - 3000K - 700mA - CRI80 - 3675Lm - 150Lm/W / CRI90 - 3150Lm - 129Lm/W
24.5W - 4000K - 700mA - CRI80 - 3860Lm - 158Lm/W / CRI90 - 3310Lm - 135Lm/W
27.4W - 3000K - 800mA - CRI80 - 4505Lm - 165Lm/W / CRI90 - 3880Lm - 142Lm/W
27.4W - 4000K - 800mA - CRI80 - 4745Lm - 173Lm/W / CRI90 - 4065Lm - 148Lm/W
31.1W - 3000K - 900mA - CRI80 - 4990Lm - 161Lm/W / CRI90 - 4295Lm - 138Lm/W
31.1W - 4000K - 900mA - CRI80 - 5250Lm - 169Lm/W / CRI90 - 4500Lm - 145Lm/W
36.6W - 3000K - 1050mA - CRI80 - 5690Lm - 155Lm/W / CRI90 - 4895Lm - 133Lm/W
36.6W - 4000K - 1050mA - CRI80 - 5990Lm - 163Lm/W / CRI90 - 5130Lm - 140Lm/W
42.3W - 3000K - 1200mA - CRI80 - 6350Lm - 150Lm/W / CRI90 - 5465Lm - 129Lm/W
42.3W - 4000K - 1200mA - CRI80 - 6690Lm - 158Lm/W / CRI90 - 5730Lm - 135Lm/W


3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 88%



LED replacement with tools




UBER 1 Q S.S.LED



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Diffuser: Glass Lens
Rotation: Vertical 90° / Horizontal 360°
IP: 40 **IK:** 04

COLORS




OPTIONAL ACCESSORIES





LIGHTING SOURCES

PrevaLED Core AC G2 | CRI80
8.6W - 3000K - 800Lm - 93Lm/W
8.9W - 2700K - 800Lm - 90Lm/W
18.4W - 4000K - 2000Lm - 109Lm/W
19.6W - 3000K - 2000Lm - 102Lm/W
3step MacAdam | Ripple < 3%
LM80 test report | Lifetime>50.000h

UBER 1 S.S.LED




UBER 1 Q F S.S.LED




LED replacement with tools


UBER 2 ADTR S.S.LED



UBER 2 Q ADTR S.S.LED




UBER 2 TR S.S.LED



TECHNICAL DETAILS

Housing: Cast-pressed aluminium / Extruded aluminium
Diffuser: Clear polycarbonate
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
Reflector: Circular diamond aluminium facets
(15°, 24°, 40°, 60°)
IP: 40 **IK:** 07

COLORS



OPTIONAL ACCESSORIES




LIGHTING SOURCES

S.S.LED High Output 1200mA

11.7W - 3000K - 350mA - CRI80 - 1975Lm - 168Lm/W / CRI90 - 1690Lm - 144Lm/W
11.7W - 4000K - 350mA - CRI80 - 2075Lm - 178Lm/W / CRI90 - 1780Lm - 151Lm/W
17.1W - 3000K - 500mA - CRI80 - 2735Lm - 160Lm/W / CRI90 - 2345Lm - 138Lm/W
17.1W - 4000K - 500mA - CRI80 - 2870Lm - 168Lm/W / CRI90 - 2460Lm - 144Lm/W
24.5W - 3000K - 700mA - CRI80 - 3675Lm - 150Lm/W / CRI90 - 3150Lm - 129Lm/W
24.5W - 4000K - 700mA - CRI80 - 3860Lm - 158Lm/W / CRI90 - 3310Lm - 135Lm/W
27.4W - 3000K - 800mA - CRI80 - 4505Lm - 165Lm/W / CRI90 - 3880Lm - 142Lm/W
27.4W - 4000K - 800mA - CRI80 - 4745Lm - 173Lm/W / CRI90 - 4065Lm - 148Lm/W
31.1W - 3000K - 900mA - CRI80 - 4990Lm - 161Lm/W / CRI90 - 4295Lm - 138Lm/W
31.1W - 4000K - 900mA - CRI80 - 5250Lm - 169Lm/W / CRI90 - 4500Lm - 145Lm/W
36.6W - 3000K - 1050mA - CRI80 - 5690Lm - 155Lm/W / CRI90 - 4895Lm - 133Lm/W
36.6W - 4000K - 1050mA - CRI80 - 5990Lm - 163Lm/W / CRI90 - 5130Lm - 140Lm/W
42.3W - 3000K - 1200mA - CRI80 - 6350Lm - 150Lm/W / CRI90 - 5465Lm - 129Lm/W
42.3W - 4000K - 1200mA - CRI80 - 6690Lm - 158Lm/W / CRI90 - 5730Lm - 135Lm/W


3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 88%

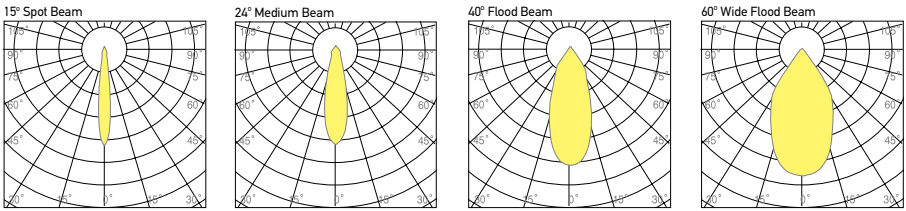


LED replacement with tools



UBER 2 Q S.S.LED



UBER 2 S.S.LED



TECHNICAL DETAILS

Housing: Cast-pressed aluminium / Extruded aluminium

Diffuser: Clear polycarbonate

Rotation: Vertical 90° / Horizontal 360°

Reflector: Circular diamond aluminium facets
(15°, 24°, 40°, 60°)

IP: 40 **IK:** 07

COLORS



OPTIONAL ACCESSORIES



LIGHTING SOURCES

PrevaLED Core AC G2 | CRI80

8.6W - 3000K - 800Lm - 93Lm/W


8.9W - 2700K - 800Lm - 90Lm/W

18.4W - 4000K - 2000Lm - 109Lm/W

19.6W - 3000K - 2000Lm - 102Lm/W


3step MacAdam | Ripple < 3%

LM80 test report | Lifetime>50.000h

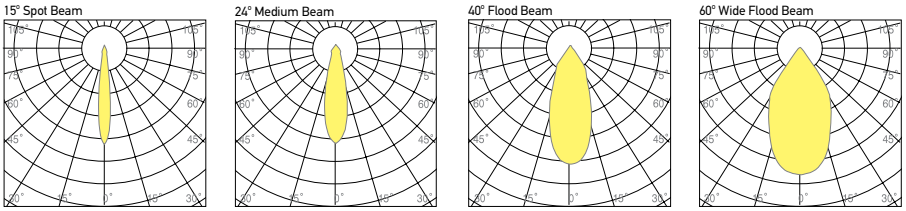


LED replacement with tools


VINCO A ADTR S.S.LED




VINCO ADTR S.S.LED



VINCO TR S.S.LED



VINCO TR3 S.S.LED

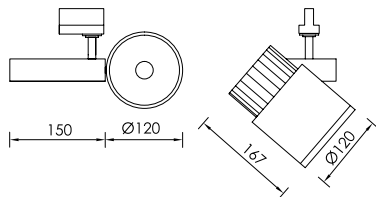

TECHNICAL DETAILS

Housing: Extruded aluminium
Diffuser: Clear polycarbonate
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
Reflector: Circular diamond aluminium facets
(15°, 24°, 40°, 60°)
IP: 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES

PrevaLED COIN 111 G2 | 24° / 40° | 3000K / 4000K


17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W

S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
28.0W - 3000K - 800mA - 4178Lm - 149Lm/W / 3579Lm - 128Lm/W
28.0W - 4000K - 800mA - 4387Lm - 157Lm/W / 3761Lm - 134Lm/W
30.8W - 3000K - 900mA - 5048Lm - 164Lm/W / 4345Lm - 141Lm/W
30.8W - 4000K - 900mA - 5315Lm - 172Lm/W / 4554Lm - 148Lm/W
36.4W - 3000K - 1050mA - 5780Lm - 159Lm/W / 4975Lm - 137Lm/W
36.4W - 4000K - 1050mA - 6085Lm - 167Lm/W / 5214Lm - 143Lm/W
42.0W - 3000K - 1200mA - 6484Lm - 154Lm/W / 5581Lm - 133Lm/W
42.0W - 4000K - 1200mA - 6828Lm - 163Lm/W / 5850Lm - 139Lm/W

**3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 86%**


VINCO A 230V LED



PrevaLED Core AC G2


8.6W - 3000K - CRI80 - 800Lm - 93Lm/W
8.9W - 2700K - CRI80 - 800Lm - 90Lm/W
18.4W - 4000K - CRI80 - 2000Lm - 109Lm/W
19.6W - 3000K - CRI80 - 2000Lm - 102Lm/W

**3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 86%**

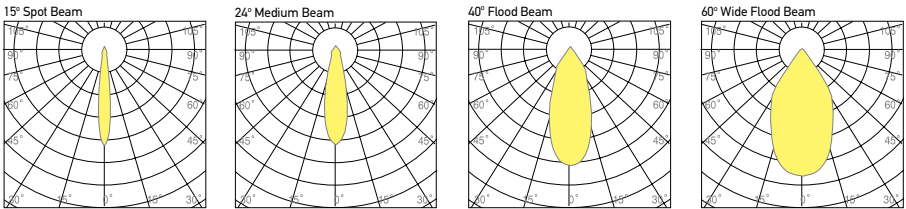


LED replacement with tools
Reflector replacement without tools
In case of safety glass IP rating turns to 02


VINCO M A ADTR S.S.LED



VINCO M ADTR S.S.LED



VINCO M TR S.S.LED



TECHNICAL DETAILS

Housing: Extruded aluminium
Diffuser: Clear polycarbonate
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
Reflector: Circular diamond aluminium facets
(15°, 24°, 40°, 60°)
IP: 20 **IK:** 07

COLORS



ACCESSORIES




LIGHTING SOURCES

S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 88%

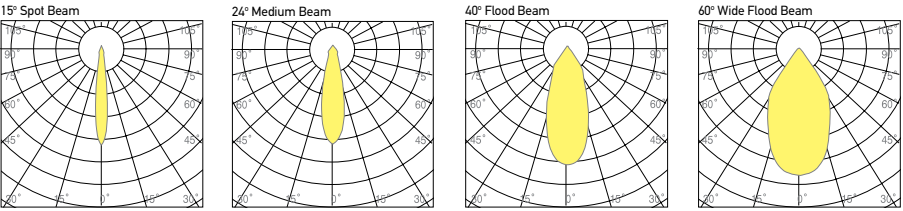


LED replacement with tools
Reflector replacement without tools
In case of safety glass IP rating turns to 02


INDOOR // SPOTLIGHTS

PENDO 1R


PENDO 1R TR S.S.LED



PENDO 1R Q ADTR S.S.LED



PENDO 1R G ADTR




In shops, a track system with spotlights is designing to be mounted without tools. The systems allow spotlights to be positioned variably on ceilings and walls. Special reflectors adapt your lighting concepts as you like and offer changeable light distributions.

TECHNICAL DETAILS

- Housing:** Extruded aluminium
- Diffuser:** Clear polycarbonate
- Rotation:** Vertical 90° / Horizontal 360°
- Control Gear:** Built-in electronic driver
- Reflector:** Circular diamond aluminium facets (15°, 24°, 40°, 60°)
- IP:** 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES

PrevaLED COIN 111 G2 | 24° / 40° | 3000K / 4000K


- 17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
- 21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
- 32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W

S.S.LED High Output - CRI80 / CRI90


- 11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
- 11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
- 16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
- 16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
- 24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
- 24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
- 28.0W - 3000K - 800mA - 4178Lm - 149Lm/W / 3579Lm - 128Lm/W
- 28.0W - 4000K - 800mA - 4387Lm - 157Lm/W / 3761Lm - 134Lm/W
- 30.8W - 3000K - 900mA - 5048Lm - 164Lm/W / 4345Lm - 141Lm/W
- 30.8W - 4000K - 900mA - 5315Lm - 172Lm/W / 4554Lm - 148Lm/W
- 36.4W - 3000K - 1050mA - 5780Lm - 159Lm/W / 4975Lm - 137Lm/W
- 36.4W - 4000K - 1050mA - 6085Lm - 167Lm/W / 5214Lm - 143Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50,000h
LM80 test report | Transmittance: 86%

PENDO 1R




PENDO 1R Q



Module 18x H.P.LED | 15° / 25° / 40° | Diffuser: PMMA Lens
18W - 350mA - 1062Lm

PrevaLED COIN 111 AC 230V | 24° / 40° | 3000K / 4000K
15.5W - CRI83 - 1250Lm 81Lm/W / 1350Lm 87Lm/W
22.5W - CRI83 - 1850Lm 82Lm/W / 1950Lm 87Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50,000h
LM80 test report | Transmittance: 86%

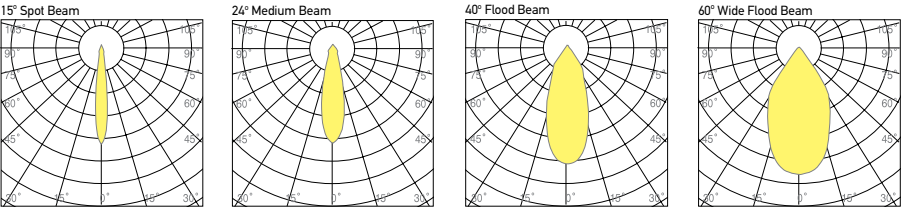


LED replacement with tools
Reflector replacement without tools
In case of safety glass IP rating turns to 02







PENDO 1




PENDO 1 G




PENDO 1 PLEXY



PENDO 1 PLEXY CLEAR



PENDO 1 Q B



TECHNICAL DETAILS

Housing: Extruded aluminium
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 07

COLORS




ACCESSORIES




LIGHTING SOURCES

PAR30/E27/E26/230V LED Lamp
PrevaLED COIN 111 AC 230V | 24°/40° | 3000K / 4000K
15.5W - CRI83 - 1250Lm 81Lm/W / 1350Lm 87Lm/W
22.5W - CRI83 - 1850Lm 82Lm/W / 1950Lm 87Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50000h
LM80 test report | Transmittance: 86%

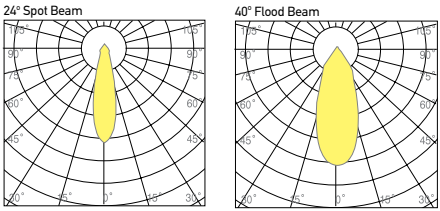

Lamp replacement without tools

PENDO 1 Q B ADTR




Control Gear: Built-in electronic driver

PrevaLED COIN 111 G2 | 24°/40° | 3000K / 4000K
17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50000h
LM80 test report | Transmittance: 86%



PENDO 15

PENDO 15 B ADTR S.S.LED



TECHNICAL DETAILS

- Housing:** Extruded aluminium
- Diffuser:** Clear polycarbonate
- Rotation:** Vertical 90° / Horizontal 360°
- Control Gear:** Built-in electronic driver
- Reflector:** Circular diamond aluminium facets (15°, 24°, 40°, 60°)
- IP:** 20 **IK:** 07

COLORS




LIGHTING SOURCES

S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
28.0W - 3000K - 800mA - 4178Lm - 149Lm/W / 3579Lm - 128Lm/W
28.0W - 4000K - 800mA - 4387Lm - 157Lm/W / 3761Lm - 134Lm/W
30.8W - 3000K - 900mA - 5048Lm - 164Lm/W / 4345Lm - 141Lm/W
30.8W - 4000K - 900mA - 5315Lm - 172Lm/W / 4554Lm - 148Lm/W
36.4W - 3000K - 1050mA - 5780Lm - 159Lm/W / 4975Lm - 137Lm/W
36.4W - 4000K - 1050mA - 6085Lm - 167Lm/W / 5214Lm - 143Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 86%


PENDO 15 S.S.LED



S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
28.0W - 3000K - 800mA - 4178Lm - 149Lm/W / 3579Lm - 128Lm/W
28.0W - 4000K - 800mA - 4387Lm - 157Lm/W / 3761Lm - 134Lm/W
30.8W - 3000K - 900mA - 5048Lm - 164Lm/W / 4345Lm - 141Lm/W
30.8W - 4000K - 900mA - 5315Lm - 172Lm/W / 4554Lm - 148Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 86%

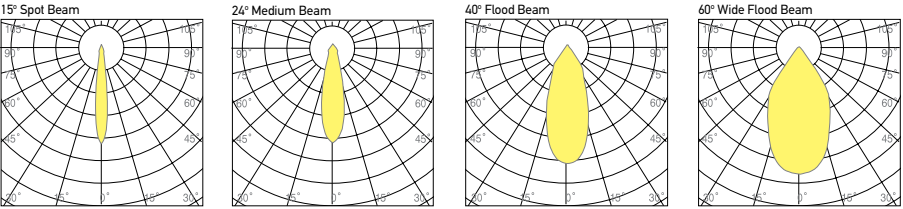


LED replacement with tools
Reflector replacement without tools

INDOOR // SPOTLIGHTS

PENDO 2 ECO

PENDO 2 A ECO S.S.LED



TECHNICAL DETAILS

Housing: Extruded aluminium
Diffuser: Clear polycarbonate
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
Reflector: Circular diamond aluminium facets
(15°, 24°, 40°, 60°)
IP: 20 **IK:** 07


COLORS




LIGHTING SOURCES

S.S.LED High Output - CRI80 / CRi90
11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 86%



PENDO 2 ECO S.S.LED



PENDO 2 Q B ECO S.S.LED



PENDO 2 Q ECO S.S.LED

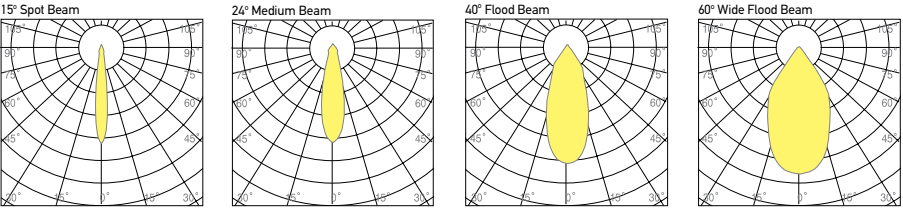

LED replacement with tools
Reflector replacement without tools




INDOOR // SPOTLIGHTS

PENDO 2


Spotlights can be placed in stores, museums, offices, common areas, residences etc. Each area has its own needs and can be covered by the appropriate lighting fixtures of BRIGHT.




PENDO 2 RGB H.P.LED




PENDO 2



PENDO 2 G



PENDO 2 Q LED



TECHNICAL DETAILS

Housing: Extruded aluminium
Diffuser: Clear polycarbonate
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
Reflector: Circular diamond aluminium facets
(15°, 24°, 40°, 60°)
IP: 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES


Module 18x H.P.LED | 15° / 25° / 40° | Diffuser: PMMA Lens
18W - 350mA - 1062Lm

PrevaLED COIN 111 AC 230V | 24°/40° | 3000K / 4000K
15.5W - CRI83 - 1250Lm 81Lm/W / 1350Lm 87Lm/W
22.5W - CRI83 - 1850Lm 82Lm/W / 1950Lm 87Lm/W

PrevaLED COIN 111 G2 | 24°/40° | 3000K / 4000K
17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W


PrevaLED Core AC G2
8.6W - 3000K - CRI80 - 800Lm - 93Lm/W
8.9W - 2700K - CRI80 - 800Lm - 90Lm/W
18.4W - 4000K - CRI80 - 2000Lm - 109Lm/W
19.6W - 3000K - CRI80 - 2000Lm - 102Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

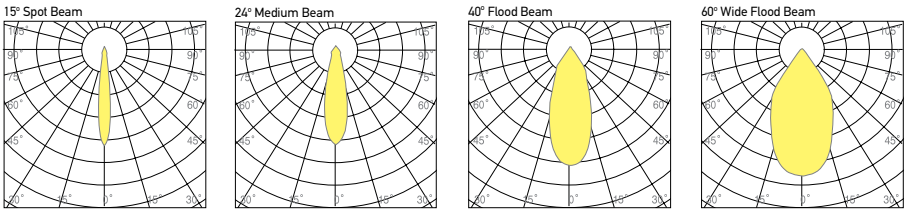

LED replacement with tools
Reflector replacement without tools
In case of safety glass IP rating turns to 02


PENDO 2R S.S.LED



S.S.LED High Output - CRI80 / CRI90
11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
28.0W - 3000K - 800mA - 4178Lm - 149Lm/W / 3579Lm - 128Lm/W
28.0W - 4000K - 800mA - 4387Lm - 157Lm/W / 3761Lm - 134Lm/W
30.8W - 3000K - 900mA - 5048Lm - 164Lm/W / 4345Lm - 141Lm/W
30.8W - 4000K - 900mA - 5315Lm - 172Lm/W / 4554Lm - 148Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 86%

PENDO 3 TR3 H.P.LED



TECHNICAL DETAILS

Housing: Extruded aluminium
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
IP: 20 **IK:** 07

COLORS




ACCESSORIES





LIGHTING SOURCES

Module 18x H.P.LED | 15° / 25° / 40° | Diffuser: PMMA Lens
18W - 350mA - 1062Lm
PrevaLED COIN 111 G2 | 24°/40° | 3000K / 4000K
17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

PENDO 3P



PENDO 3P F

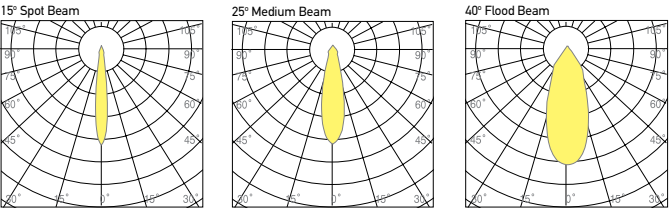


LED replacement with tools


INDOOR // SPOTLIGHTS

PENDO M


PENDO M 1R ADTR S.S.LED




PENDO M 1R Q TR3 S.S.LED



PENDO M 1R Q ADTR S.S.LED



PENDO M 1R TR S.S.LED



TECHNICAL DETAILS

Housing: Extruded aluminium

Diffuser: Clear polycarbonate


Rotation: Vertical 90° / Horizontal 360°

Reflector: Circular diamond aluminium facets
(14°, 25°, 40°, 60°)

Control Gear: Built-in electronic transformer / driver

IP: 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES

MR16/GU5.3/12V LED Lamp

S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W

11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W

16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W

16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W


24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W

24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h


LM80 test report | Transmittance: 88%

BRIGHT's spotlights with reflector technology include diverse and efficient light solutions for corporate lighting, in order to present products in professional eye-catching style.

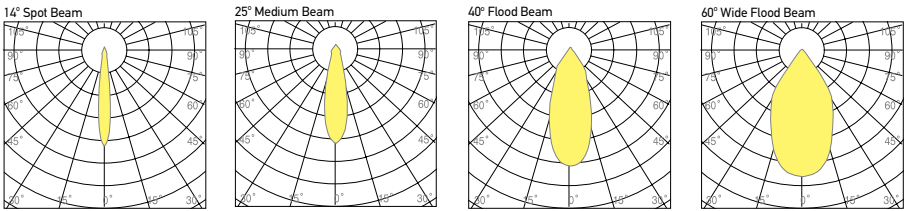


Reflector replacement without tools
In case of safety glass IP rating turns to 02
LED replacement with tools | Lamp replacement without tools


PENDO M 1R TR3 B S.S.LED




PENDO M 1R TR3 S.S.LED



PENDO M 2R Q ADTR S.S.LED



PENDO M 15 B ADTR S.S.LED



TECHNICAL DETAILS

Housing: Extruded aluminium

Diffuser: Clear polycarbonate


Rotation: Vertical 90° / Horizontal 360°

Reflector: Circular diamond aluminium facets
(14°, 25°, 40°, 60°)

Control Gear: Built-in electronic transformer / driver

IP: 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES

MR16/GU5.3/12V LED Lamp

S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W

11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W

16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W


16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W

24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W

24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h

LM80 test report | Transmittance: 88%

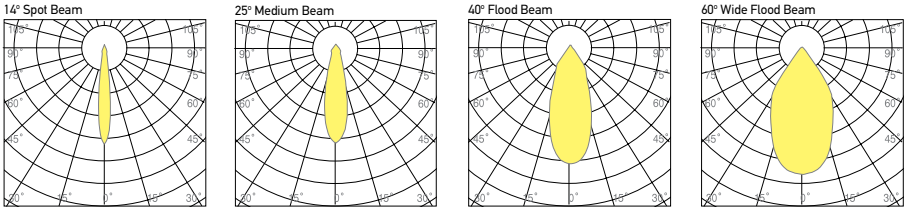


Reflector replacement without tools
In case of safety glass IP rating turns to 02
LED replacement with tools | Lamp replacement without tools


INDOOR // SPOTLIGHTS

PENDO M

PENDO M 1 Q ADTR



PENDO M 1 TR3



TECHNICAL DETAILS

Housing: Extruded aluminium
Diffuser: Clear polycarbonate
Rotation: Vertical 90° / Horizontal 360°
Reflecto: Circular diamond aluminium facets
(14°, 25°, 40°, 60°)
Control Gear: Built-in electronic transformer / driver
IP: 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES


MR16/GU5.3/12V LED Lamp

S.S.LED High Output - CRI80 / CRI90

11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 88%

PENDO M FOCUS S.S.LED




Diffuser: Glass lens

S.S.LED High Output - CRI80 / CRI90


11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

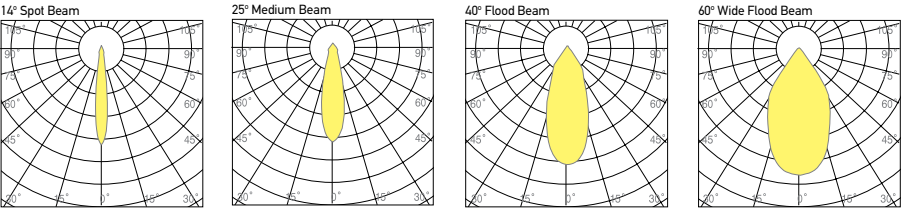

Reflector replacement without tools
In case of safety glass IP rating turns to 02
LED replacement with tools | Lamp replacement without tools


PENDO M 1R Q



TECHNICAL DETAILS

Housing: Extruded aluminium
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 07

COLORS



ACCESSORIES




LIGHTING SOURCES


PAR16/GU10/230V LED Lamp
PAR20/E27/E26/230V LED Lamp




PENDO M 1R




PENDO M Q B



Modern Shop require adapting knowledge of appropriate colour rendering, colour temperature, light sources, and surfaces/textures to be illuminated, making the most of your brand and product. And once a concept is developed, we can quickly and efficiently adapt it for roll-outs of chain stores.

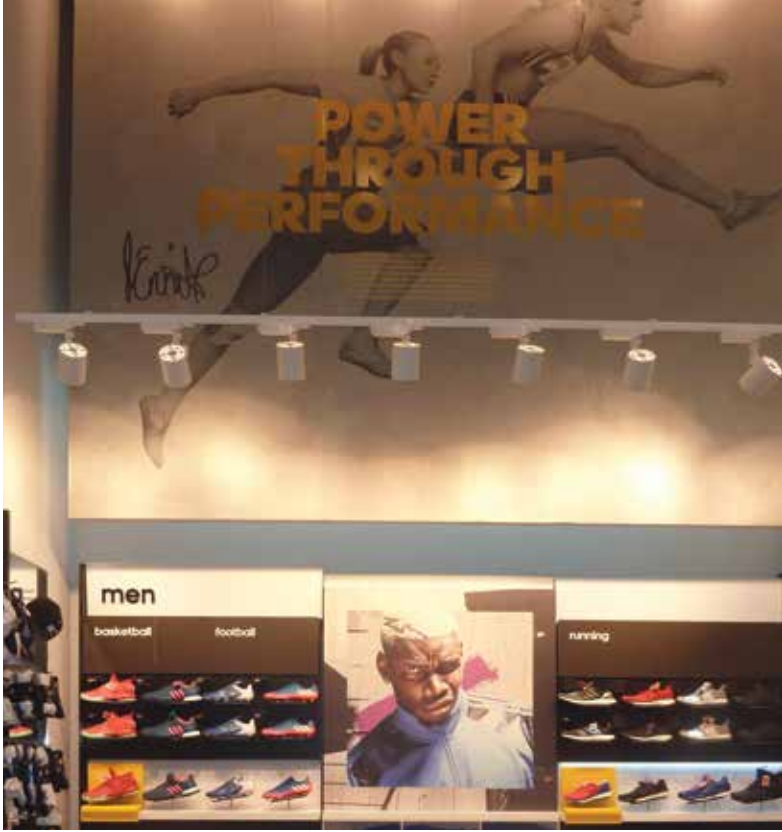


PENDO S SQUARE 12




LED replacement without tools

POTIS M



POTIS L



BRIGHT's spotlights apply the latest trends in retail design. Different light distributions such as narrow, medium and flood beam have always to tell a story...



TECHNICAL DETAILS


- Housing:** Extruded aluminium
- Diffuser:** Clear polycarbonate
- Rotation:** Vertical 90° / Horizontal 360°
- Reflector:** Circular diamond aluminium (14°, 24°, 36°)
- Control Gear:** Built-in electronic driver
- IP:** 20 **IK:** 07

COLORS




LIGHTING SOURCES

- S.S.LED High Output - CRI80 / CRI90**
- 11.6W - 3000K - 350mA - 1978Lm - 170Lm/W / 1695Lm - 146Lm/W
 - 11.6W - 4000K - 350mA - 2077Lm - 179Lm/W / 1781Lm - 153Lm/W
 - 16.9W - 3000K - 500mA - 2752Lm - 163Lm/W / 2358Lm - 139Lm/W
 - 16.9W - 4000K - 500mA - 2890Lm - 171Lm/W / 2478Lm - 147Lm/W
 - 24.2W - 3000K - 700mA - 3721Lm - 153Lm/W / 3188Lm - 131Lm/W
 - 24.2W - 4000K - 700mA - 3907Lm - 161Lm/W / 3350Lm - 138Lm/W
- 3step MacAdam | Ripple < 3% | Lifetime>50.000h**
LM80 test report | Transmittance: 86%

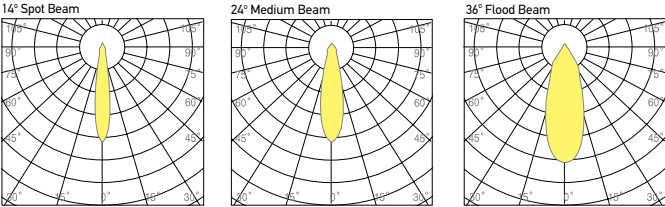

LED replacement with tools
Reflector replacement without tools


POTIS S




LIGHTING SOURCES

- MR16/GU5.3/12V** LED Lamp
- PAR16/GU10/230V** LED Lamp
- COIN LED Module | 24°/40° | 3000K / 4000K**
- 10.7W - CRI90 - 830Lm 77lm/W / 900Lm 84lm/W
 - 10.7W - CRI80 - 1100Lm 102lm/W / 1200Lm 112lm/W
 - 12.8W - CRI80 - 1280Lm 100lm/W / 1400Lm 109lm/W
- S.S.LED - CRI80 / CRI90**
- 5.4W - 3000K - 160mA - 896Lm - 167Lm/W / 762Lm - 142Lm/W
 - 5.4W - 4000K - 160mA - 944Lm - 176Lm/W / 805Lm - 150Lm/W
 - 6.1W - 3000K - 180mA - 999Lm - 164Lm/W / 850Lm - 140Lm/W
 - 6.1W - 4000K - 180mA - 1053Lm - 173Lm/W / 897Lm - 147Lm/W
 - 6.8W - 3000K - 200mA - 1101Lm - 162Lm/W / 936Lm - 138Lm/W
 - 6.8W - 4000K - 200mA - 1160Lm - 170Lm/W / 988Lm - 145Lm/W
 - 7.5W - 3000K - 220mA - 1201Lm - 159Lm/W / 1021Lm - 136Lm/W
 - 7.5W - 4000K - 220mA - 1265Lm - 168Lm/W / 1078Lm - 143Lm/W
 - 8.3W - 3000K - 240mA - 1299Lm - 157Lm/W / 1105Lm - 134Lm/W
 - 8.3W - 4000K - 240mA - 1369Lm - 166Lm/W / 1166Lm - 141Lm/W
 - 9.0W - 3000K - 260mA - 1396Lm - 155Lm/W / 1187Lm - 132Lm/W
 - 9.0W - 4000K - 260mA - 1471Lm - 163Lm/W / 1253Lm - 139Lm/W
 - 9.8W - 3000K - 280mA - 1491Lm - 153Lm/W / 1268Lm - 130Lm/W
 - 9.8W - 4000K - 280mA - 1570Lm - 161Lm/W / 1338Lm - 137Lm/W
- 3step MacAdam | Ripple < 3%**
LM80 test report | Lifetime>50.000h


SALUS 1




SALUS 2




SALUS 8



SALUS 5



SALUS 5P



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 07

COLORS




ACCESSORIES




LIGHTING SOURCES

PAR30/E27/E26/230V LED Lamp
PrevaLED COIN 111 G2 | 24°/40° | 3000K / 4000K
17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

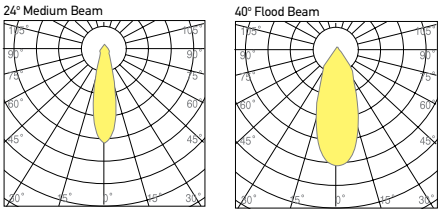

Lamp replacement without tools


SALUS 2 TR H.P.LED



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic transformer
IP: 20 **IK:** 07

COLORS




ACCESSORIES




LIGHTING SOURCES

QR111/G53/12V LED Lamp
Module 18x H.P.LED | 15° / 25° / 40° | Diffuser: PMMA Lens
18W - 350mA - 1062Lm
PrevaLED COIN 111 G2 | 24°/40° | 3000K / 4000K
17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report



SALUS 7 TR H.P.LED



SALUS 7H ADTR H.P.LED



SALUS 5 TR H.P.LED

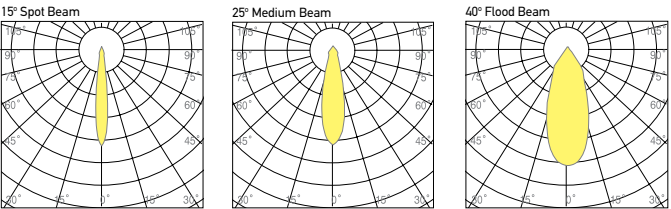

Reflector replacement without tools
LED replacement with tools | Lamp replacement without tools




BRIGHT's LED lighting fixtures offer excellent light quality and are quick and easy to install on track systems.

INDOOR // SPOTLIGHTS

MINI SALUS

MINI SALUS 1



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 07

COLORS




ACCESSORIES




LIGHTING SOURCES

PAR16/GU10/230V LED Lamp

MINI SALUS 2



MINI SALUS 8



Lamp replacement without tools


TORRIS




The luminaire's unique beam lends itself particularly to the illumination of tables. A uniform illumination of vertical surfaces is possible using the special accessories, providing the designer with a range of lighting tools for efficient visual comfort where required.




TORRIS 3 ADTR S.S. LED




TORRIS 3R ADTR A2 S.S. LED




TORRIS 3 ADTR A2 S.S. LED



TORRIS 3R Q TR4 S.S. LED



TORRIS VINCO S.S. LED



TECHNICAL DETAILS

Housing: Extruded aluminium
Diffuser: Safety glass clear
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic transformer/driver
Reflector: Circular (17°, 24°, 36°)
IP: 20 **IK:** 04

COLORS



LIGHTING SOURCES

MR16/GU5.3/12V LED Lamp

COIN LED Module | 24°/40° | 3000K / 4000K


10.7W - CRI90 - 830Lm 77lm/W / 900Lm 84lm/W
10.7W - CRI80 - 1100Lm 102lm/W / 1200Lm 112lm/W
12.8W - CRI80 - 1280Lm 100lm/W / 1400Lm 109lm/W

S.S.LED - CRI80 / CRI90

5.4W - 3000K - 160mA - 896Lm - 167Lm/W / 762Lm - 142Lm/W
5.4W - 4000K - 160mA - 944Lm - 176Lm/W / 805Lm - 150Lm/W
6.1W - 3000K - 180mA - 999Lm - 164Lm/W / 850Lm - 140Lm/W
6.1W - 4000K - 180mA - 1053Lm - 173Lm/W / 897Lm - 147Lm/W
6.8W - 3000K - 200mA - 1101Lm - 162Lm/W / 936Lm - 138Lm/W
6.8W - 4000K - 200mA - 1160Lm - 170Lm/W / 988Lm - 145Lm/W
7.5W - 3000K - 220mA - 1201Lm - 159Lm/W / 1021Lm - 136Lm/W
7.5W - 4000K - 220mA - 1265Lm - 168Lm/W / 1078Lm - 143Lm/W
8.3W - 3000K - 240mA - 1299Lm - 157Lm/W / 1105Lm - 134Lm/W
8.3W - 4000K - 240mA - 1369Lm - 166Lm/W / 1166Lm - 141Lm/W
9.0W - 3000K - 260mA - 1396Lm - 155Lm/W / 1187Lm - 132Lm/W
9.0W - 4000K - 260mA - 1471Lm - 163Lm/W / 1253Lm - 139Lm/W
9.8W - 3000K - 280mA - 1491Lm - 153Lm/W / 1268Lm - 130Lm/W
9.8W - 4000K - 280mA - 1570Lm - 161Lm/W / 1338Lm - 137Lm/W


3step MacAdam | Ripple < 3%

LM80 test report | Lifetime>50.000h

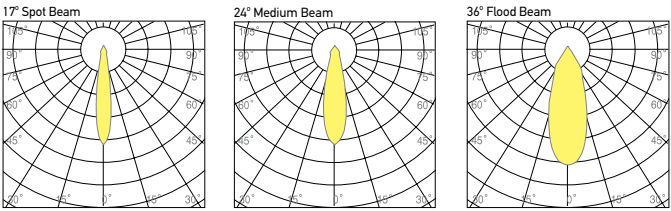

LED replacement with tools
Reflector replacement without tools

ARCUS TORRIS



MR16/GU5.3/12V LED Lamp


COIN LED Module | 24°/40° | 3000K / 4000K

10.7W - CRI90 - 830Lm 77lm/W / 900Lm 84lm/W
10.7W - CRI80 - 1100Lm 102lm/W / 1200Lm 112lm/W
12.8W - CRI80 - 1280Lm 100lm/W / 1400Lm 109lm/W


3step MacAdam | Ripple < 3%

Lifetime>50.000h | LM80 test report

TORRIS 3




TORRIS 3 A2




PAR16/GU10/230V LED Lamp

FERUS 20 H.P.LED



FERUS 20 SQ H.P.LED



Spotlights bring flexible light to architecture: The most important characteristic is mobility, both when positioning on track and when aligning. BRIGHT's spotlight series feature different power ranges and detailed solutions for each particular area of application.



TECHNICAL DETAILS


Housing: Extruded aluminium
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
IP: 40 **IK:** 05

COLORS




LIGHTING SOURCES

Spot H.P.LED
1.0W - 350mA - CRI80 - 3000K - 155Lm - 155Lm/W
1.0W - 350mA - CRI80 - 4000K - 170Lm - 166Lm/W
1.5W - 500mA - CRI80 - 3000K - 215Lm - 143Lm/W
1.5W - 500mA - CRI80 - 4000K - 230Lm - 153Lm/W
Lenses: 25°/40°/Oval Beam 30°65° | **Reflector:** 10°/20°
3step MacAdam | Ripple < 3%Lifetime>50.000h
LM80 test report

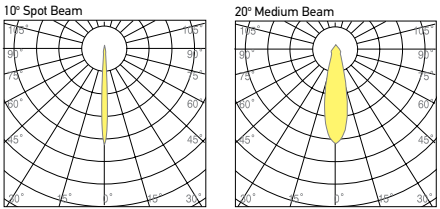

LED replacement with tools
Reflector replacement without tools


FERUS 3 STK



Housing: Pressed formed steel
Control Gear: Remote electronic transformer
IP: 20 **IK:** 03

MR16/GU5.3/12V LED Lamp
PAR16/GU10/230V LED Lamp

FERUS 40 SQ



Reflector: Circular (17°, 24°, 36°)


LIGHTING SOURCES

S.S.LED - CRI80 / CRI90
5.4W - 3000K - 160mA - 896Lm - 167Lm/W / 762Lm - 142Lm/W
5.4W - 4000K - 160mA - 944Lm - 176Lm/W / 805Lm - 150Lm/W
6.1W - 3000K - 180mA - 999Lm - 164Lm/W / 850Lm - 140Lm/W
6.1W - 4000K - 180mA - 1053Lm - 173Lm/W / 897Lm - 147Lm/W
6.8W - 3000K - 200mA - 1101Lm - 162Lm/W / 936Lm - 138Lm/W
6.8W - 4000K - 200mA - 1160Lm - 170Lm/W / 988Lm - 145Lm/W
7.5W - 3000K - 220mA - 1201Lm - 159Lm/W / 1021Lm - 136Lm/W
7.5W - 4000K - 220mA - 1265Lm - 168Lm/W / 1078Lm - 143Lm/W
8.3W - 3000K - 240mA - 1299Lm - 157Lm/W / 1105Lm - 134Lm/W
8.3W - 4000K - 240mA - 1369Lm - 166Lm/W / 1166Lm - 141Lm/W
9.0W - 3000K - 260mA - 1396Lm - 155Lm/W / 1187Lm - 132Lm/W
9.0W - 4000K - 260mA - 1471Lm - 163Lm/W / 1253Lm - 139Lm/W
9.8W - 3000K - 280mA - 1491Lm - 153Lm/W / 1268Lm - 130Lm/W
9.8W - 4000K - 280mA - 1570Lm - 161Lm/W / 1338Lm - 137Lm/W

3step MacAdam | Ripple < 3%
LM80 test report | Lifetime>50.000h

MILES


MILES 3



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic transformer
IP: 20 **IK:** 04

COLORS



LIGHTING SOURCES

R111/G53/12V LED Lamp

PrevaLED COIN 111 G2 | 24°/40° | 3000K / 4000K
17.3W - CRI92 - 1430Lm 82Lm/W / 1560Lm 90Lm/W
21.6W - CRI83 - 2300Lm 106Lm/W / 2500Lm 115Lm/W
32.1W - CRI83 - 3300Lm 102Lm/W / 3600Lm 112Lm/W


PrevaLED COIN 111 AC 230V | 24°/40° | 3000K / 4000K

15.5W - CRI83 - 1250Lm 81Lm/W / 1350Lm 87Lm/W
22.5W - CRI83 - 1850Lm 82Lm/W / 1950Lm 87Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

LED replacement with tools

MILES 1




Control Gear: Built-in electronic transformer

MR16/GU5.3/12V LED Lamp

PAR16/GU10/230V LED Lamp

VENTUS


VENTUS 1 TR H.P.LED



TECHNICAL DETAILS

Housing: Cast-pressed aluminium / Extruded aluminium
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
IP: 20 **IK:** 07

COLORS



ACCESSORIES



LIGHTING SOURCES


Module 18x H.P.LED | 15° / 25° / 40° | Diffuser: PMMA Lens

18W - 350mA - 1062Lm

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

LED replacement with tools

VENTUS 2P LED




PrevaLED Core AC G2 | CRI80

8.6W - 3000K - 800Lm - 93Lm/W
8.9W - 2700K - 800Lm - 90Lm/W
18.4W - 4000K - 2000Lm - 109Lm/W
19.6W - 3000K - 2000Lm - 102Lm/W

3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

VENTUS


VENTUS 1 Q U S S LED




TECHNICAL DETAILS

Housing: Cast-pressed aluminium / Extruded aluminium
Diffuser: Glass Lens
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 04

COLORS



ACCESSORIES



LED replacement with tools


LIGHTING SOURCES

PrevaLED Core AC G2 | CRI80
8.6W - 3000K - 800Lm - 93Lm/W
8.9W - 2700K - 800Lm - 90Lm/W
18.4W - 4000K - 2000Lm - 109Lm/W
19.6W - 3000K - 2000Lm - 102Lm/W

3step MacAdam | Ripple < 3%
LM80 test report | Lifetime>50.000h

CITO


CITO



TECHNICAL DETAILS

Housing: Cast-pressed aluminium / Extruded aluminium
Diffuser: Glass Lens
Rotation: Vertical 90° / Horizontal 360°
Control Gear: Built-in electronic driver
IP: 20 **IK:** 04

COLORS




LIGHTING SOURCES

PrevaLED Core AC G2 | CRI80
8.6W - 3000K - 800Lm - 93Lm/W
8.9W - 2700K - 800Lm - 90Lm/W

S.S.LED High Output 1200mA
11.7W - 3000K - 350mA - CRI80 - 1975Lm - 168Lm/W / CRI90 - 1690Lm - 144Lm/W
11.7W - 4000K - 350mA - CRI80 - 2075Lm - 178Lm/W / CRI90 - 1780Lm - 151Lm/W
17.1W - 3000K - 500mA - CRI80 - 2735Lm - 160Lm/W / CRI90 - 2345Lm - 138Lm/W
17.1W - 4000K - 500mA - CRI80 - 2870Lm - 168Lm/W / CRI90 - 2460Lm - 144Lm/W


3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report | Transmittance: 88%



LED replacement with tools

VERUS


VERUS 2



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 07


COLORS



LIGHTING SOURCES

PAR30/E27/E26/230V LED Lamp

VERUS 6




ES111/GU10/230V LED Lamp

LED replacement without tools

CERTUS


CERTUS 1



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
IP: 20 **IK:** 07


COLORS



LIGHTING SOURCES

PAR30/E27/E26/230V LED Lamp
PrevaLED COIN 111 AC 230V | 24°/40° | 3000K / 4000K
15.5W - CRI83 - 1250Lm 81Lm/W / 1350Lm 87Lm/W
22.5W - CRI83 - 1850Lm 82Lm/W / 1950Lm 87Lm/W
3step MacAdam | Ripple < 3% | Lifetime>50.000h
LM80 test report

MINI CERTUS



Control gear: Built-in electronic transformer


PAR16/GU10/230V LED Lamp
MR16/GU5.3/12V LED Lamp

LED replacement with tools



VICUS


VICUS



TECHNICAL DETAILS

Housing: Cast-pressed aluminium
Rotation: Vertical 90° / Horizontal 360°
Control gear: Remote electronic tranformer
IP: 20 **IK:** 07

COLORS




LIGHTING SOURCES

MR16/GU5.3/12V LED Lamp

LED replacement with tools

SECTOR SQUARE DONE 4


SECTOR SQUARE DONE 4



TECHNICAL DETAILS

Housing: Cast-pressed aluminium / Extruded aluminium
Rotation: Vertical 30° / Horizontal 30°
Control Gear: Built-in electronic driver
IP: 20 **IK:** 07

COLORS



LIGHTING SOURCES

PAR30/E27/E26/230V LED Lamp
A60/E27/E26/230V LED Lamp

LED replacement without tools





fibreled.com