


circular led profiles



PARIS
94



MIAMI
98



PARIS XL
100



OSLO
B&W
102

OSLO
103

Our PROFESSIONAL led profile series for surfaces and ceiling suspension is manufactured in high purity anodised aluminium and available in 3 different colours. The profile has a wide range of applications, examples of which include ceiling suspended luminaires, luminaires for displaying paintings, wardrobe garment rails, floor or wall mounted luminaires, and others.



Its “easy-ON” cover (available in 5 different finishings), when combined with this profile, provides an IP65 rating to the luminaire. Therefore, the profile can be used in places with high levels of humidity, for example bathrooms, kitchens, gyms, spas, cold storage chambers, fridges and others.

This profile and its covers are available in lengths of 2 and 6 metres, allowing us to carry out large projects where all the profiles do not need joints. It is suitable for led strips with a maximum width of 12mm and a power not greater than 30W/m. In order to obtain a more homogeneous and diffused illumination, we recommend the combined use of both our opal diffusers and Canovelles-Barcelona-Gomera-Cíes led strips.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

Scale 1:1

When applying the lens cover on the Paris profile together with the flexible led strip we get a beam of 35° light.

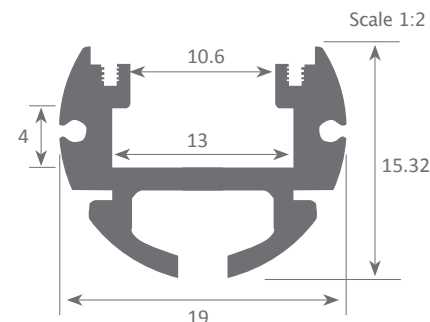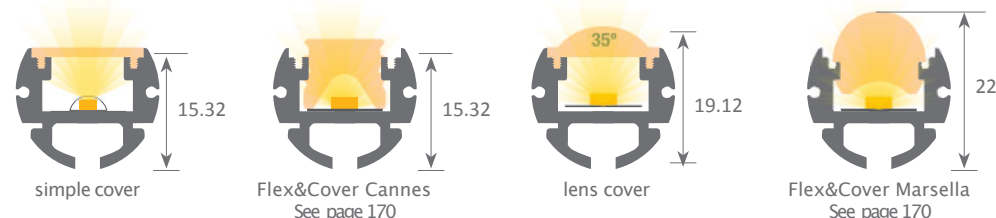

Aluminium profile

13.001	anodised silver	2m
13.002	anodised black	2m
13.003	anodised inox	2m
13.004	anodised silver	6m
13.005	anodised black	6m
13.006	anodised inox	6m



Plastic endcaps

19.083	grey without hole
19.084	grey with hole
19.085	black without hole
19.086	black with hole



Plastic endcaps

19.087	grey without hole lens
19.088	grey with hole lens
19.089	black without hole lens
19.090	black with hole lens



Polycarbonate cover “easy-ON”

18.001	transparent	2m
18.002	opal	2m
18.003	frosted	2m
18.004	transparent	6m
18.005	opal	6m
18.006	frosted	6m



Black&White cover “easy-ON”

18.007	Black&White	2m
18.008	opaque grey	2m
18.009	Black&White	6m




Polycarbonate cover “easy-ON”






18.010	lens	2m
18.011	lens	6m



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.273kg / Alloy: 6063 / Perimeter: 121mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0

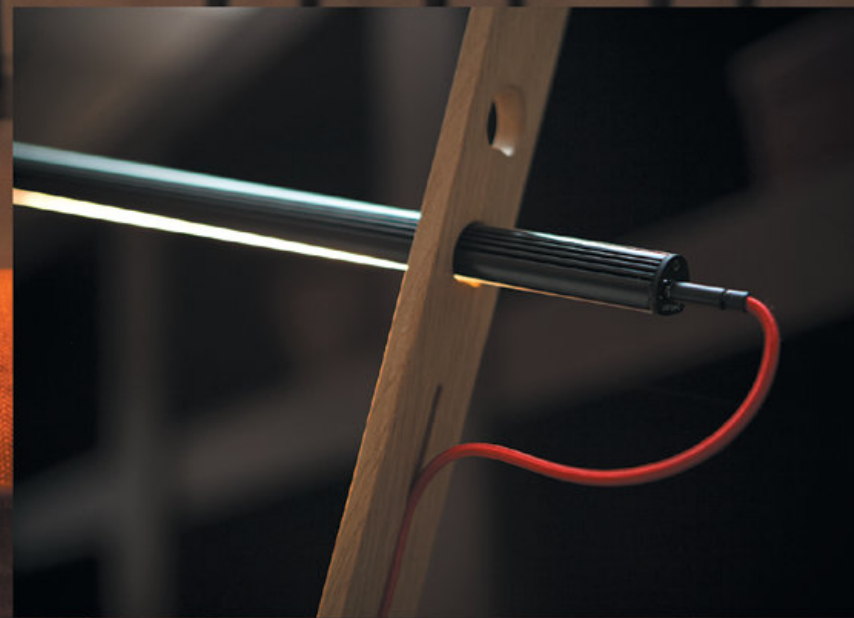

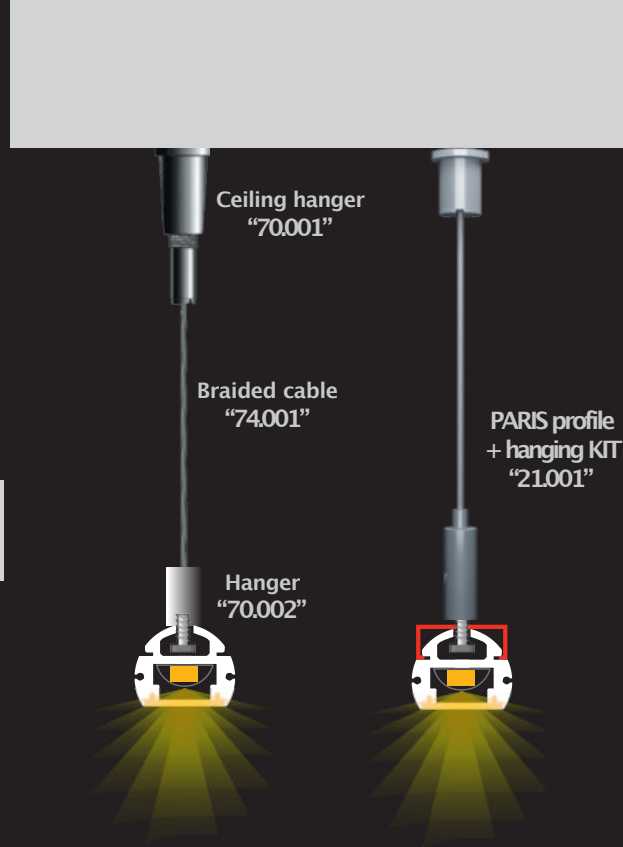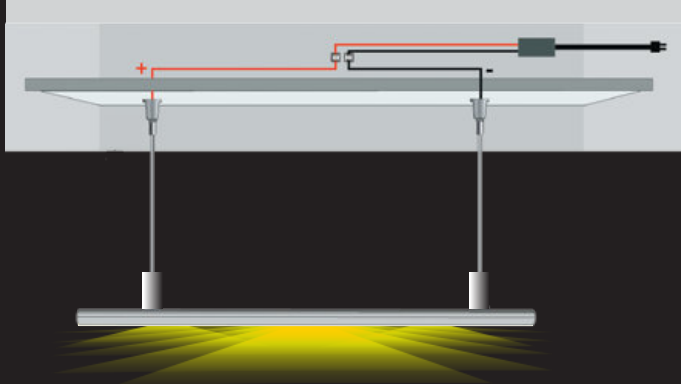

Clip
20.007 chrome steel
20.008 black oxide finish



Ceiling hanger
70.001 aluminium



Hanger
70.002



Hanging KIT
21.001 silver set of 2 units
21.002 white set of 2 units
21.003 black set of 2 units
(clip not included)



Braided cable
74.001 steel





Supporting arm
22.006 silver anodised
22.007 black anodised
Measurements: 170x50mm






Centre support
22.008 swivel support



Clip
20.019 metal

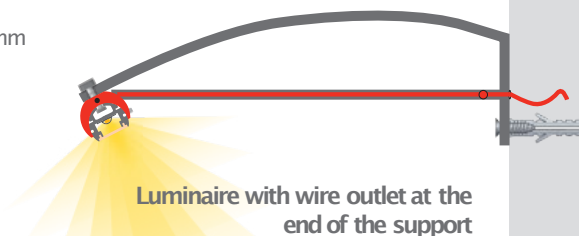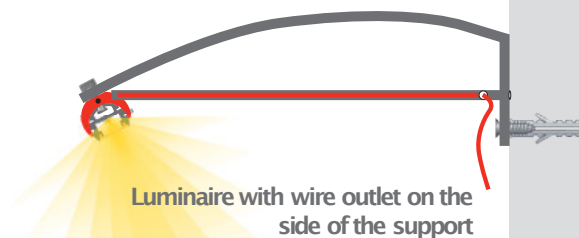

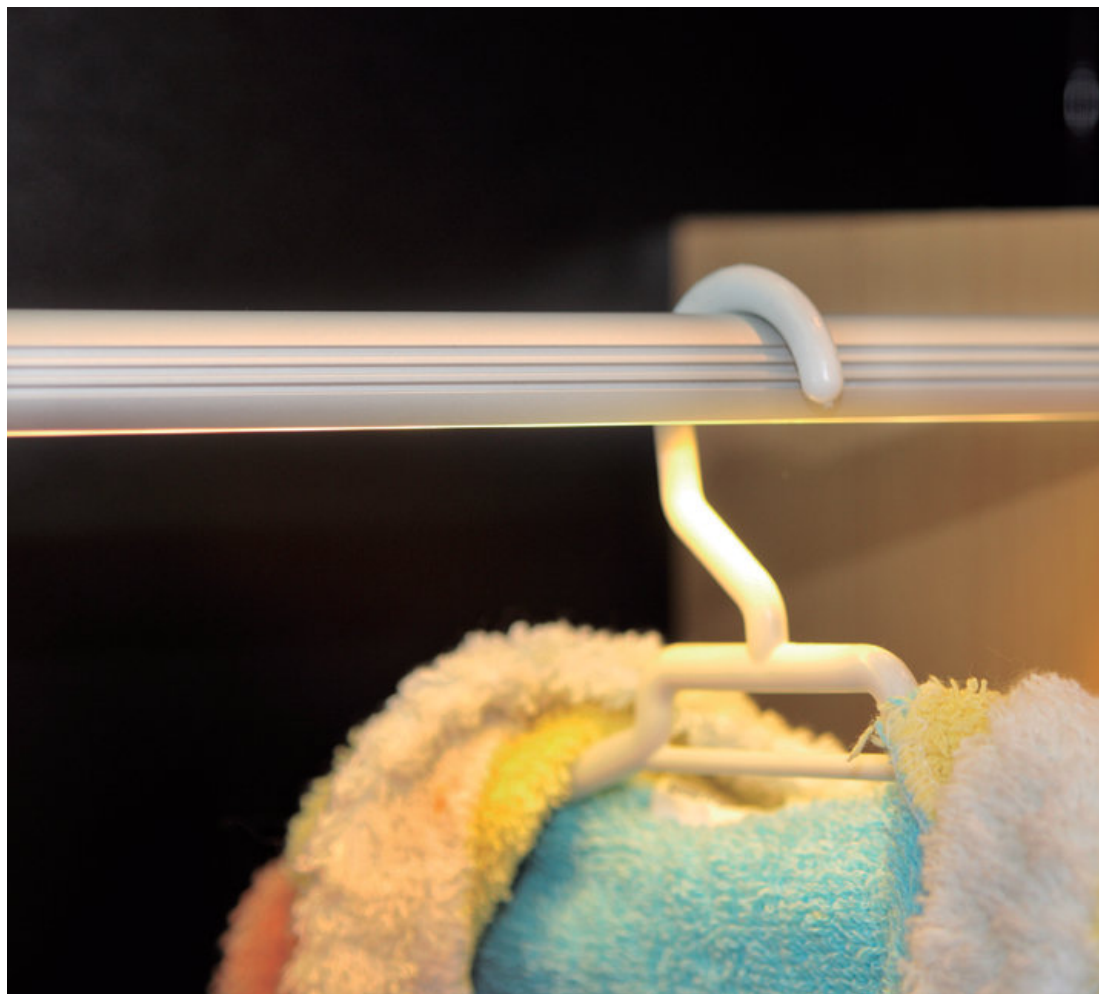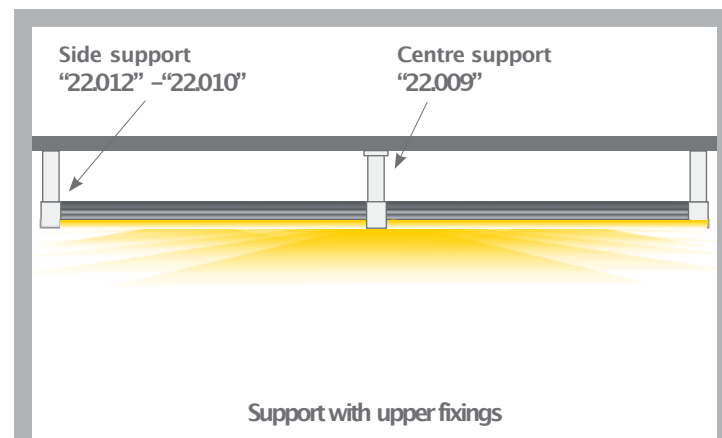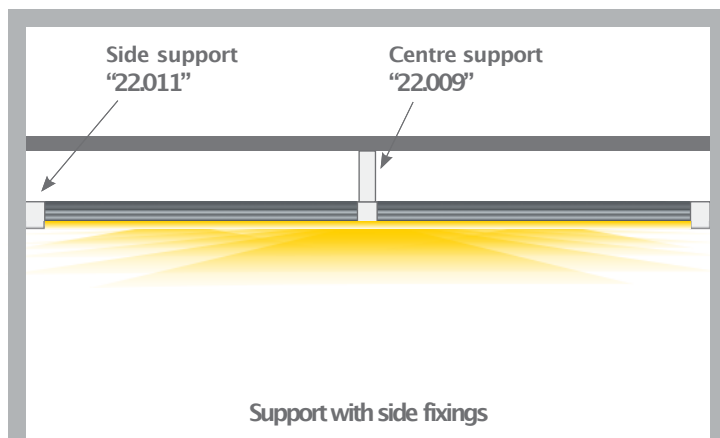

Centre support
22.009 aluminium



Side support
22.010 aluminium



Side support
22.011 aluminium




Side support
22.012 aluminium

Our BASIC led profile series for angles and ceiling suspension is manufactured in high purity aluminium and available in anodised silver, lacquered white and raw aluminium (on demand, we can supply different anodised and lacquered finishings. This profile has a wide range of applications, examples of which include ceiling suspended luminaires, luminaires for displaying paintings, wardrobe garment rails, floor or wall mounted luminaires, and others.

It can be used with led strips with a maximum width of 12.5mm and a power not greater than 30W/m. In order to obtain a more homogeneous illumination, while also making the dots invisible, we recommend the combined use of both our frosted covers and Canovelles-Barcelona-Gomera led strips.

We offer a 2 year guarantee on our profiles and covers.

MIAMI

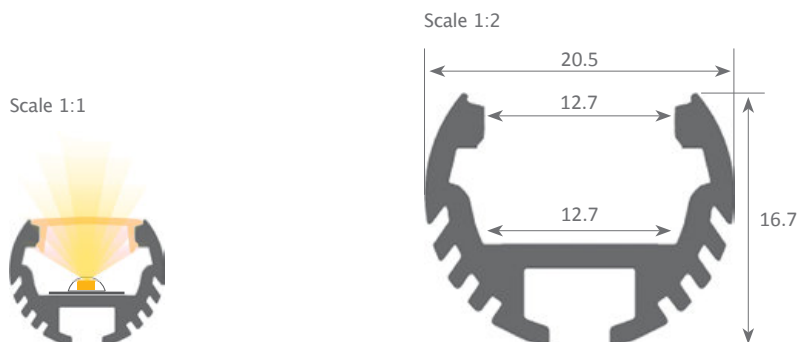

Aluminium profile

13.007	anodised silver	2m
13.008	white lacquered	2m
13.009	raw	2m
13.010	anodised silver	6m
13.011	white lacquered	6m
13.012	raw	6m



Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.018	opal	3m
18.016	transparent	6m
18.017	frosted	6m



Plastic endcaps

19.091	white with hole
19.092	white without hole
19.093	grey with hole
19.094	grey without hole



Supporting arm

22.006	silver anodised
22.007	black anodised

Measurements: 170x50mm



Clip

20.005	transparent plastic
--------	---------------------



clip

20.019	metal
--------	-------

Paris complements can also be used



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.265kg / Alloy: 6063 / Perimeter: 125mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)

Made with Paris XL led Profile
Cortesy of singular.design



Our PROFESSIONAL led profile series for surfaces and ceiling suspension is manufactured in high purity aluminium and available in anodised silver, black and inox. It covers many uses where we require a width greater than the standard, examples of which include ceiling suspended luminaires, luminaires for displaying paintings, and others. Additionally, its optimum width allows us to use wider led strips for an increased heat dissipation and a wider angle of light emission.

Its upper channel allows us to manufacture square, rectangular or L-shaped hanging luminaires. By combining its "easy-ON" cover (available in 3 different finishings), we provide an IP65 to the luminaire. Therefore, the profile can be used in places with high levels of humidity, for example bathrooms, kitchens, gyms, spas, cold storage chambers, fridges, or others.



The profile and its covers are available in lengths of 2 and 6 metres, thus enabling us to carry out large projects where all the profiles don't need joints. Suitable for led strips with a maximum width of 20mm. Apart from flexible led strips, also rigid ones can be combined with this profile.

We offer a 10 year guarantee on profiles and a 4 year guarantee on covers.

PARIS XL



IP65

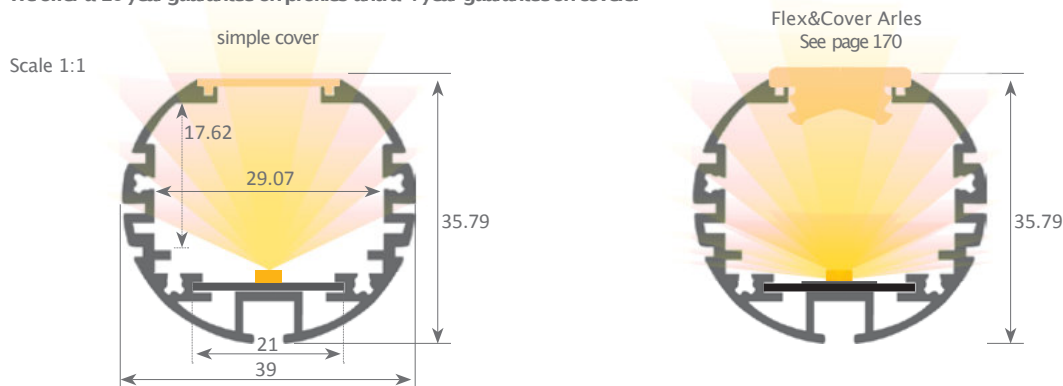

Perfil de aluminio

13.013	anodised silver	2m
13.014	anodised inox	2m
13.015	anodised black	2m
13.016	anodised silver	6m
13.017	anodised inox	6m
13.018	anodised black	6m



Aluminium endcaps

19.095	anodised silver
19.096	anodised black



Plastic endcaps

19.097	grey
19.098	black



Clip

20.020	transparent polycarbonate
20.021	metal



Polycarbonate cover "easy-ON"

18.022	transparent	2m
18.023	opal	2m
18.024	frosted	2m
18.025	transparent	6m
18.026	opal	6m
18.027	frosted	6m



Black&White cover "easy-ON"

18.028	Black&White	2m
18.029	Black&White	6m



Polycarbonate cover "easy-ON"

18.030	lens	2m
18.031	lens	6m



Supporting arm

22.006	silver anodised
22.007	black anodised

Measurements: 170x50mm




Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.740kg / Alloy: 6063 / Perimeter: 341mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0



Inner plate
22.013 aluminium 2 m



90° angle bracket
22.003 steel



Hanging KIT
21.001 silver set of 2 units
21.002 white set of 2 units
21.003 black set of 2 units
(clip not included)






Profile joint
22.005 steel



120° angle bracket
22.004 steel

Scale 1:1

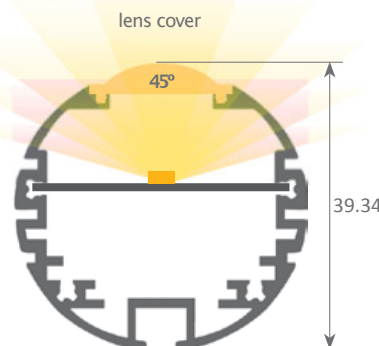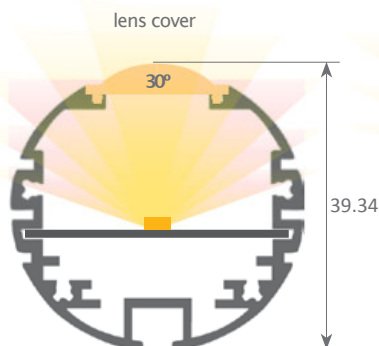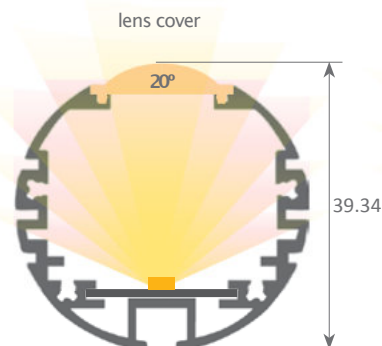

By applying the lens cover on the Paris XL profile together with the flexible LED strip we achieve 3 different light angles.
The information is just approximate. Please check with our technical department



Hanging KIT
"21.001"

Our PROFESSIONAL led profile series which is manufactured in Black&White, is ideal for surfaces, ceiling suspended luminaires, floor or wall mounted luminaires and similar.


It is suitable for led strips with a maximum width of 15mm and a power not greater than 30W/m. In order to obtain a more homogeneous illumination, while also making a non dot effect, we recommend combining it with our Élite series of led strips and also our ecoled digital model Hawaii RGB.

We offer a 2 year guarantee.

OSLO Black&White



Scale 1:1

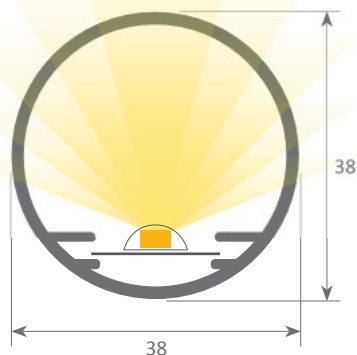

Polycarbonate profile
13.020 black frosted 3m



Endcaps
19.104 methacrylate



Surface endcaps
19.100 blue plastic
19.101 white plastic
19.102 black plastic
19.103 red plastic




Inner plate
22.014 aluminium
(2000x230x1.5mm)



Hanging KIT
21.001 silver set of 2 units
21.002 white set of 2 units
21.003 black set of 2 units
(clip not included)



Clip
20.020 transparent polycarbonate
20.021 metal

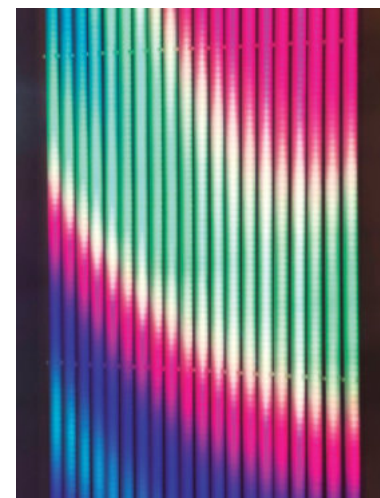

Oslo Black&White with digital led strip




Plastic profile extrusion process in accordance with: ISO 9001
Theoretical weight: 0.275kg/m / Raw material: acrylic PMMA / Perimeter: 119.4mm / Acrylic purity: 99.95%

Our PROFESSIONAL led profile series for surfaces and ceiling suspension is manufactured in white frosted polycarbonate. The profile is ideal for surface applications, for example ceiling suspended luminaires, floor or wall mounted luminaires, and similar. It is suitable for led strips with a maximum width of 15mm and a power not greater than 30W/m. In order to obtain a more homogeneous illumination, while also making the dots invisible, we recommend combining it with our Canovelles-Barcelona-Gomera led strips. We offer a 2 year guarantee.

OSLO

Scale 1:1

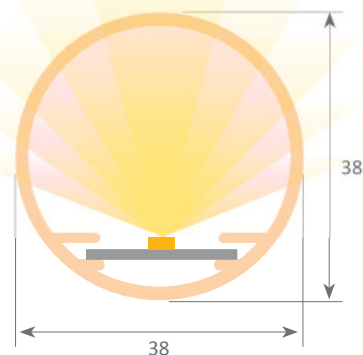

Hanging KIT
"21.001"



Polycarbonate profile
13.019 white frosted 3m



Endcaps
19.099 frosted methacrylate



Surface endcaps
19.100 blue plastic
19.101 white plastic
19.102 black plastic
19.103 red plastic




Inner plate
22.014 aluminium
(2000x230x1.5mm)



Hanging KIT
21.001 silver set of 2 units
21.002 white set of 2 units
21.003 black set of 2 units
(clip not included)



Clip
20.020 transparent polycarbonate
20.021 metal

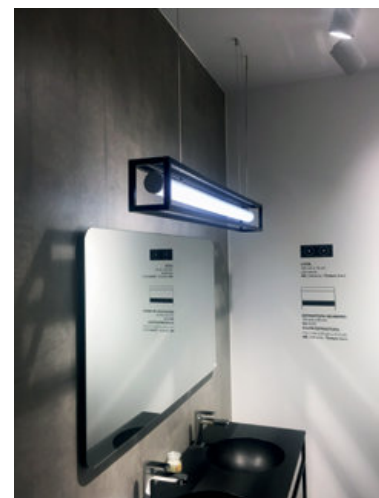

Plastic profile extrusion process in accordance with: ISO 9001
Theoretical weight: 0.275kg/m / Raw material: acrylic PMMA / Perimeter: 119.4mm / Acrylic purity: 99.95%