


Big Profiles



A wide range of large and medium sized profiles used to manufacture surface, hanging, recessed luminaires or wall lamps.

Our main models are available with our exclusive IP65 “easy-ON” system. Both profile and cover are also available in lengths of up to 6 metres in one single piece.

We also offer models with trellis covers, optics, 3-phase rails for spotlights, recessed and asymmetrical lighting.

Aluminium profiles with an IP65 waterproofing with our “easy-ON” system, for hanging, surfaces and embedding.
Front removable tray with triple safety system (except Múnich Mini, Gales, Gales with optics, Gales with recessed tray, Gales with trellis, Bruselas, Amberes and Houston).


Up&Down cover available in transparent or frosted white.

Safety cable which fixes the removable tray to the profile and also making maintenance easier.


Vossloh-Schwabe power supply with Dali, 1-10V or PUSH controllers, offering a 5 year guarantee.

Aluminium front removable tray with triple safety system (clipping of cover, safety cable and screw).


“easy-ON” IP65 cover (European patent), available in opal white, transparent microprism and Black&White.

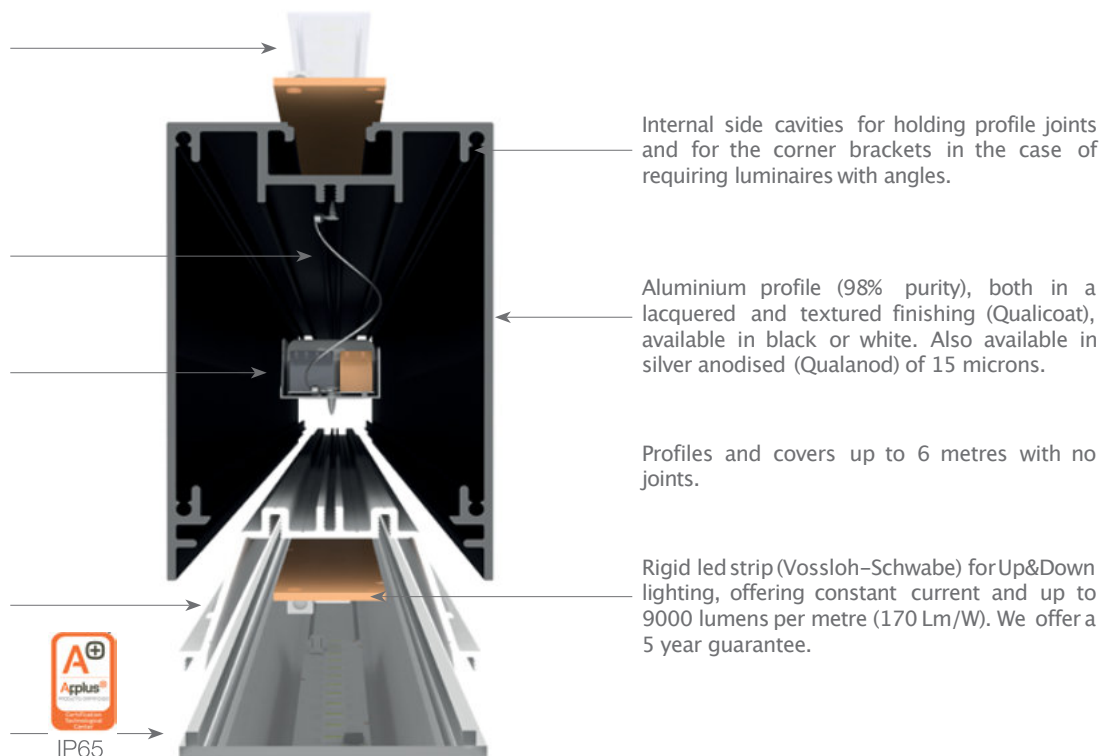

Front removable tray system with triple fall protection (safety anchorage)

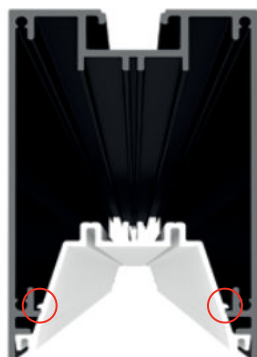

Profile clipping with profile tray

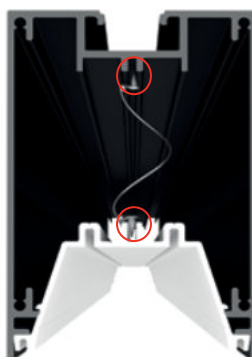

Safety cable to hold tray to profile



Pin screw from tray to profile

Aluminium profiles with our “easy-ON” system, offering an IP65 and designed for hanging, surfaces and embedding.

Front removable tray with triple safety system (except “Mini” models).

MOSCU
MAGNUM



MUNICH
MAGNUM



MOSCU
MAGNUM
SLIM





MUNICH
MAGNUM
SLIM




MOSCU
MINI




MUNICH
MINI

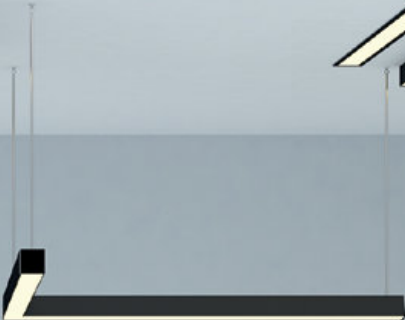


MOSCU
MINI



MOSCU
MAGNUM
SLIM



MOSCU
MAGNUM



MUNICH
MINI



MUNICH
MAGNUM
SLIM



MUNICH
MAGNUM


big profiles for recessing






MOSCU
MINI

214




MOSCU
MAGNUM
SLIM

216




MOSCU
MAGNUM

218




MOSCU
SLIM

220




MOSCU

221



KRAKOVIA
with OPTIC

222




KRAKOVIA
with RECESSED
TRAY

223




KRAKOVIA
with tray,
and "Global"
3-phase rail

224




KRAKOVIA
with tray
and trellis

225



KRAKOVIA
ASYMMETRIC

226

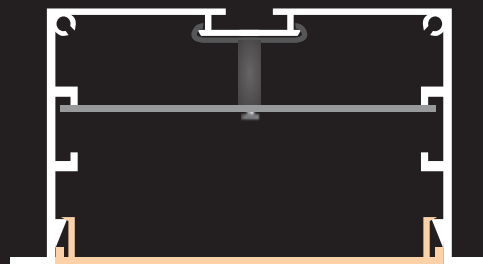

ANDORRA



227

Our PROFESIONAL led profile series for embedding is manufactured in high purity silver anodised and black or white lacquered textured aluminium.

Its cover ("easy-ON" system) in frosted white finishing, which offers an IP65 to the luminaire, is extremely useful in areas with high humidity levels (not suitable for white or black lacquered finishings). Covers are also available in frosted or transparent microprism, which improve glare and also higher UGR levels. Both profile and cover are available in 6m length, allowing us to carry out long projects without joints.

We offer a 10 year guarantee on the profile and a 4 year guarantee on the covers.

Scale 1:1

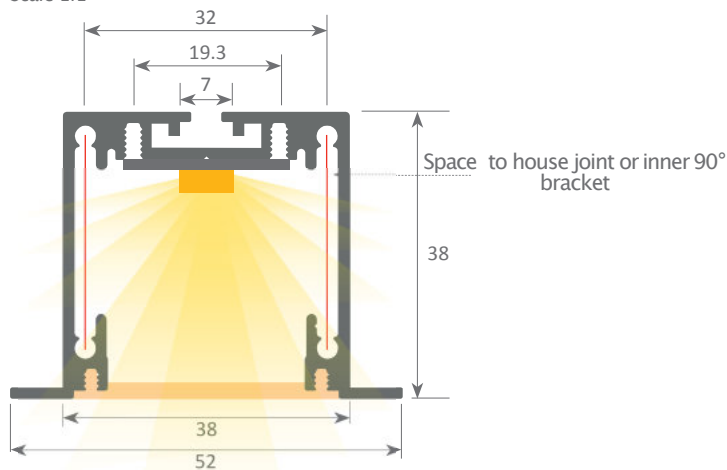

Aluminium profile

14.001	silver anodised	6m
14.002	lacquered white	6m
14.003	lacquered black	6m



Aluminium endcaps

19.186	silver anodised
19.187	lacquered white
19.188	lacquered black



Universal hanger kit

21.001	silver	set of 2 units
21.002	black	set of 2 units
21.003	white	set of 2 units



"easy-ON" cover

18.070	"easy-ON" frosted	6m
18.071	transparent microprism	6m
18.072	frosted microprism	6m
18.073	Black&White	6m



Clip

20.042	steel
--------	-------



Fixing bracket

20.023	for shallow recessing profiles
--------	--------------------------------



IP65



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0,862Kg / Alloy: 6063 / Perimeter: 380mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0



90° angle bracket
Ref: 22.035

Inner plate
Ref: 22.034

Flat bracket
Ref: 22.058



90° angle bracket
22.035 aluminium

set of 2 units



Inner plate
22.034 aluminium

set of 2 units



Flat bracket
22.058 aluminium

set of 2 units

Our PROFESIONAL led profiles series for embedding is manufactured in high purity silver anodised and black or white lacquered textured aluminium. Its internal tray, where the led and the power supply are placed, can be removed from the front which means easy maintenance. Drivers can be housed inside. Its "easy-ON" system cover in frosted white finishing, which offers an IP65 to the luminaire, is extremely useful in areas with high humidity levels.

Covers are also available in frosted or transparent microprism, which improves glare and also UGR levels. Both profile and cover are available in 6m lengths, allowing us to carry out long projects without joints.

We offer a 10 year guarantee on the profile and a 4 year guarantee on the covers.

MOSCU MAGNUM SLIM



IP65



Scale 1:1



Aluminium profile

- 15.004 anodised silver 6 m
- 15.005 lacquered white 6 m
- 15.006 lacquered black 6 m



Aluminium tray

- 15.007 lacquered white 6 m



"easy-ON" cover

- 18.070 "easy-ON" frosted 6m
- 18.071 transparent microprism 6m
- 18.072 frosted microprism 6m
- 18.073 Black&White 6m



90° angle bracket

- 22.040 aluminium set of 2 units



Aluminium endcaps

- 19.195 anodised silver
- 19.196 lacquered white
- 19.197 lacquered black



Flat bracket

- 22.057 aluminium set of 2 units



Inner plate

- 22.041 aluminium set of 2 units




Safety cable

- 22.039 steel 18 cm



clip

- 20.045 steel

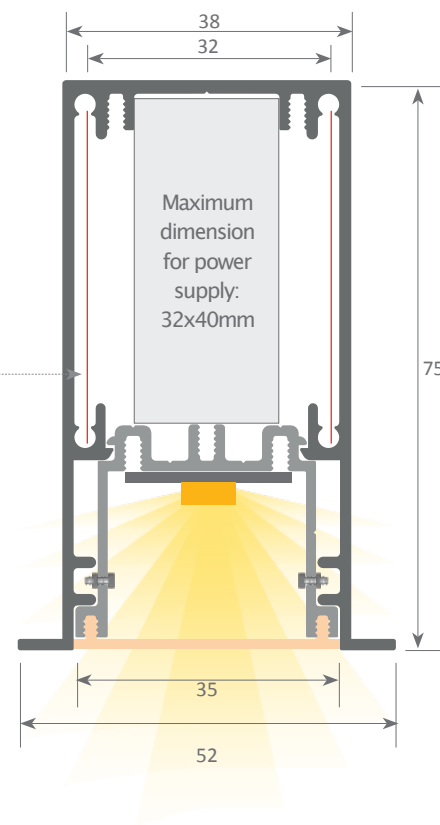

Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.464Kg / Alloy: 6063 / Perimeter: 483mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0

90° angle bracket
22.040

Flat bracket
22.057

Our PROFESIONAL led profiles series for embedding is manufactured in high purity silver anodised and black or white lacquered textured aluminium. Its internal tray, where the led and the power supply are placed, can be removed from the front which means easy maintenance. Drivers can be housed inside. Its "easy-ON" system cover in frosted white finishing, which offers an IP65 to the luminaire, is extremely useful in areas with high humidity levels.

Covers are also available in frosted or transparent microprism, which improves glare and also UGR levels. Both profile and cover are available in 6m lengths, allowing us to carry out long projects without joints.

We offer a 10 year guarantee on the profile and a 4 year guarantee on the covers.

MOSCU MAGNUM



IP65



Aluminium profile

14.004 anodised silver 6 m
14.005 lacquered black 6 m
14.006 lacquered white 6 m



Aluminium tray

14.007 lacquered white 6m



Clip

20.044 steel



"easy-ON" cover

18.074 frosted "easy-ON" 6 m
18.075 transparent microprism 6 m
18.076 frosted microprism 6 m



Aluminium endcaps

19.192 silver anodised
19.193 lacquered white
19.194 lacquered black



Inner plate

22.038 aluminium set of 2 pieces



Safety cable

22.039 steel 18 cm



90° angle bracket


22.037 aluminium set of 2 pieces



Flat bracket


22.059 aluminium set of 2 units

Scale 1:1

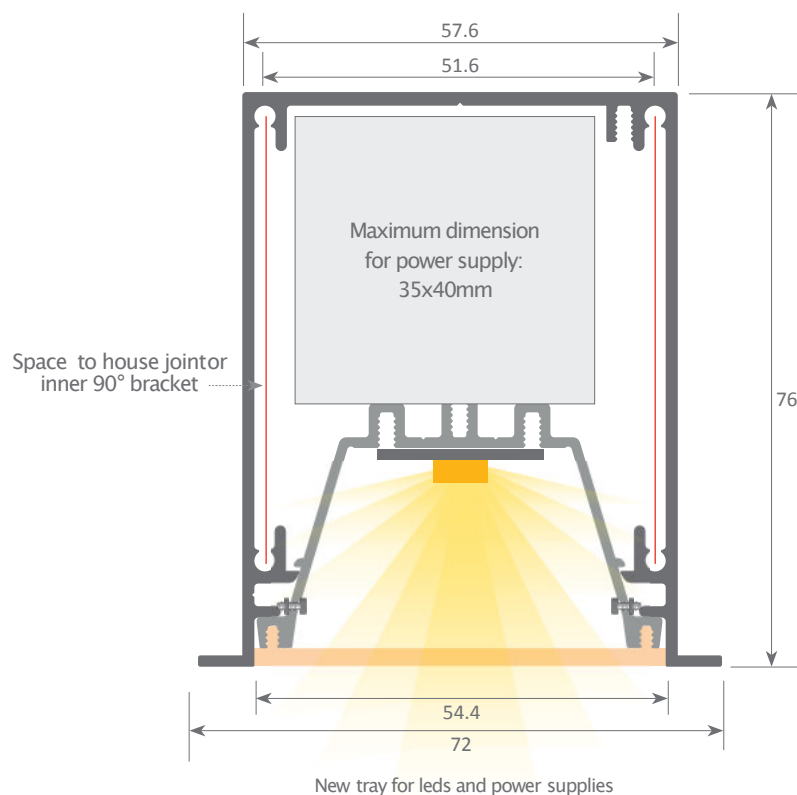

Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.666Kg / Alloy: 6063 / Perimeter: 535mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0



90° angle bracket
22.037

Flat bracket
22.059

Our PROFESIONAL led profiles series for embedding is manufactured in high purity silver anodised and black or white lacquered textured aluminium. Drivers can be housed inside.



This profile can be combined with our "easy-ON" frosted white cover, which offers an IP65 to the luminaire. This is extremely useful in areas with high humidity levels. We also have available transparent and frosted microprism covers which improve glare and UGR levels.

Both profile and cover are available in 6m length allowing us to carry out long projects without joints. We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

MOSCU SLIM





IP65

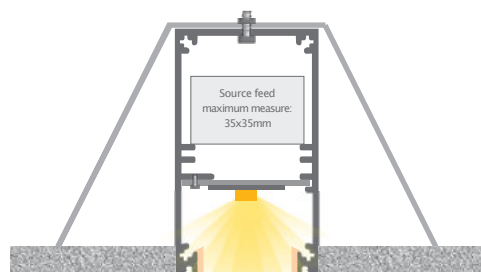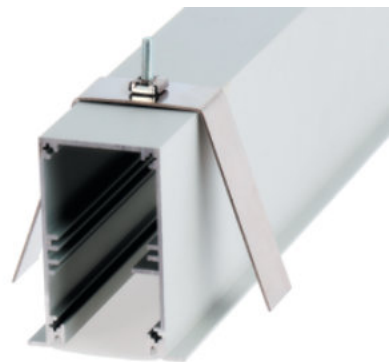

Microprism cover

18.071 transparent – 18.072 frosted

Scale 1:1

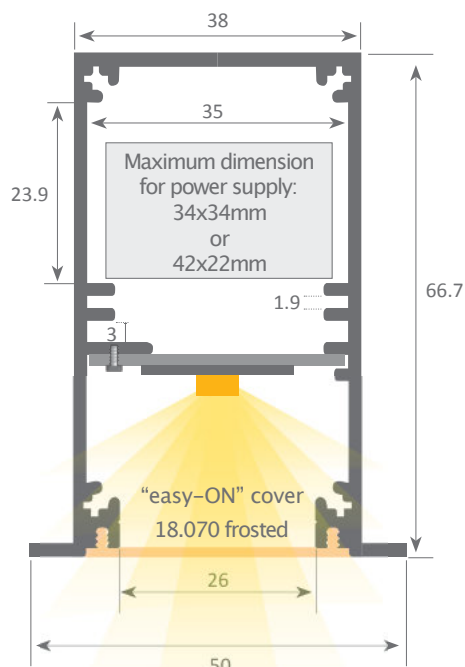

Aluminium profile

15.001	silver anodised	6 m
15.002	lacquered white	6 m
15.003	lacquered black	6 m



"easy-ON" cover

18.070	frosted "easy-ON"	6m
18.071	transparent microprism	6m
18.072	frosted microprism	6m
18.073	Black&White	6m



Aluminium endcaps

19.189	silver anodised
19.190	lacquered white
19.191	lacquered black



Clip

20.043	steel
--------	-------



Inner plate

22.036	aluminium	200 cm
--------	-----------	--------



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 – ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.048Kg / Alloy: 6063 / Perimeter: 483mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0

Our PROFESSIONAL led profiles for recessing is manufactured in high purity silver anodised and black or white lacquered textured aluminium. Drivers can be housed inside.

This profile can be combined with our "easy-ON" frosted white cover, which offers an IP65 to the luminaire, and it is extremely useful in areas with high humidity levels. We also have available transparent and frosted micropism covers which improve glare and UGR levels.

Both profile and cover are available in 6 metre lengths which permit long installations to be carried out without requiring joints.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.


MOSCU



IP65



Scale 1:1

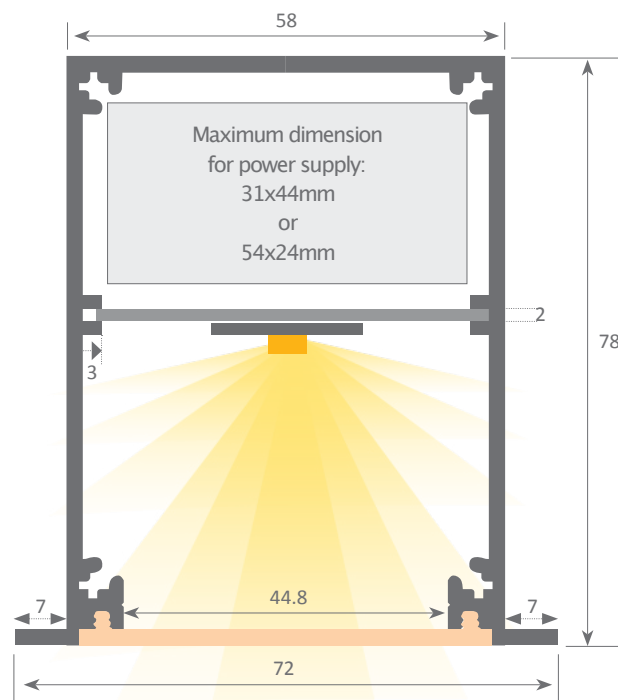

Aluminium profile

14.008	anodised silver	6m
14.009	lacquered white	6m
14.010	lacquered black	6m



Clip

20.046	steel	
Measurements: 60x75mm		



"easy-ON" cover

18.074	frosted "easy-ON"	6m
18.075	transparent micropism	6m
18.076	frosted micropism	6m




Inner plate

22.042	aluminium	200 cm
22.043	for optic rigid strip 40mm	200 cm



Aluminium endcaps

19.198	silver anodised
19.199	lacquered white
19.200	lacquered black



Safety cable

22.039	steel	18cm
--------	-------	------



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.239Kg / Alloy: 6063 / Perimeter: 544mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0

Our PROFESSIONAL led profile series for recessing applications is manufactured in high purity aluminium and lacquered in textured white, black and grey. Drivers can be housed inside.

This profile can be used with different types of optics (see page 305).

The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety measures, we recommend the fixing of a braided cable from the profile base to the dissipation tray. Both profile and cover are available in 3.4 metre lengths.

We offer a 2 year guarantee on the profiles and covers.

KRAKOVIA with OPTIC



Aluminium profile

14.011	textured grey	3.40m
14.012	textured white	3.40m
14.013	textured black	3.40m



Internal tray

14.014	textured grey	3.40m
14.015	textured white	3.40m



Optic

See page 305



Joint between profiles

22.044	steel	set of 2 units
--------	-------	----------------



Aluminium endcaps


19.201	grey
19.202	white



Clip

20.047	steel
--------	-------


Scale 1:1

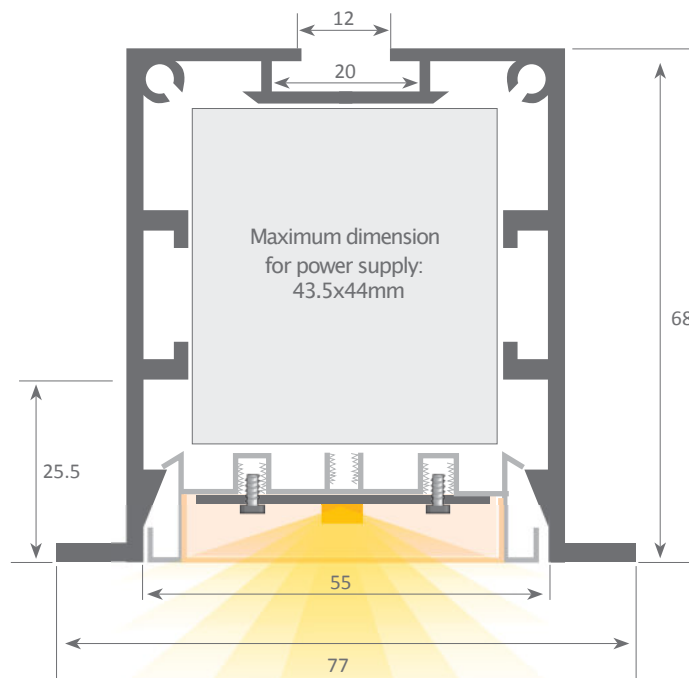

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.202Kg / Alloy: 6063 / Perimeter: 562mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5

Our PROFESSIONAL led profile series for recessing applications is manufactured in high purity aluminium and lacquered in textured white, black and grey. Drivers can be housed inside. The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety measures, we recommend the fixing of a braided cable from the profile base to the dissipation tray. Both profile and cover are available in 3.4 metre lengths. We offer a 2 year guarantee on the profiles and covers.

KRAKOVIA with RECESSED TRAY

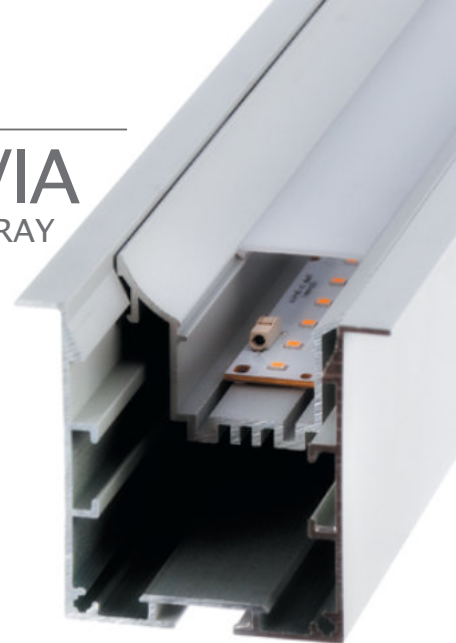

Aluminium profile

14.011	textured grey	3.40m
14.012	textured white	3.40m
14.013	textured black	3.40m



Recessed tray

14.018	textured grey	3.40m
14.019	textured white	3.40m
14.025	textured black	3.40m



Cover

18.079	frosted	3.40m
--------	---------	-------



Joint between profiles

22.044	steel	set of 2 units
--------	-------	----------------



Aluminium endcaps


19.201	grey
19.202	white



Clip

20.047	steel
--------	-------

Scale 1:1

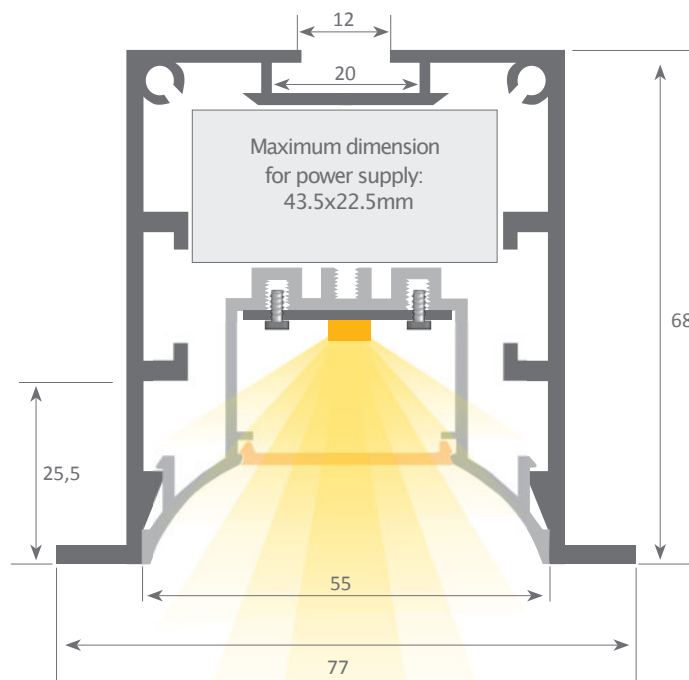

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.202Kg / Alloy: 6063 / Perimeter: 562mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5

Our PROFESSIONAL led profile series for recessing applications is manufactured in high purity aluminium and lacquered in white or textured black. Drivers can be housed inside. The tray can be removed from the front which means easy maintenance. Also, this tray can be combined also with a "Global" 3 phase rail in order to hang spotlights. For safety we recommend fixing a braided cable from the profile base to the tray. Both profile and cover are available in 3.4m lengths. We offer a 2 year guarantee on the profiles and covers.

KRAKOVIA with tray and "Global" 3-phase rail



Aluminium profile

14.012	textured white	3.40m
14.013	textured black	3.40m



Aluminium tray

14.016	textured white	3.40m
14.017	textured black	3.40m



Trellis

16.016	textured white	1.124m
16.017	textured black	1.124m



Joint between profiles

22.044	steel	set of 2 units
--------	-------	----------------



Aluminium endcaps

19.202	white
19.203	black




Clip

20.047	steel
--------	-------



Safety cable

22.039	steel	18 cm
--------	-------	-------

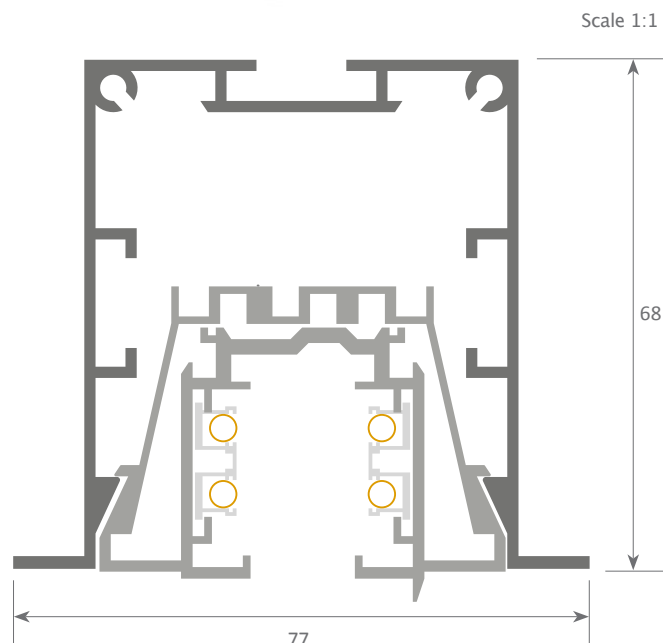


Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.202Kg / Alloy: 6060 / Perimeter: 552mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5

Our PROFESSIONAL led profile series for recessing applications is manufactured in high purity aluminium and lacquered in white or textured black. Drivers can be housed inside. The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety we recommend fixing a braided cable from the profile base to the tray. Both profile and cover are available in 3.4m lengths. We offer a 2 year guarantee on the profiles and covers.

KRAKOVIA

with tray and trellis

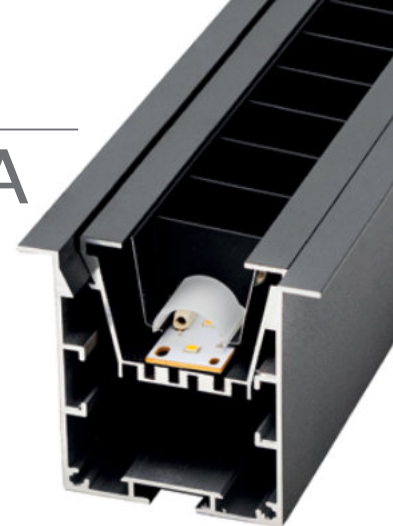

Aluminium profile

14.012	textured white	3.40m
14.013	textured black	3.40m



Aluminium tray

14.016	textured white	3.40m
14.017	textured black	3.40m



Trellis

16.016	textured white	1.124m
16.017	textured black	1.124m



Joint between profiles

22.044	steel	set of 2 units
--------	-------	----------------



Aluminium endcaps

19.202	white
19.203	black




Clip

20.047	steel
--------	-------



Safety cable


22.039	steel	18 cm
--------	-------	-------

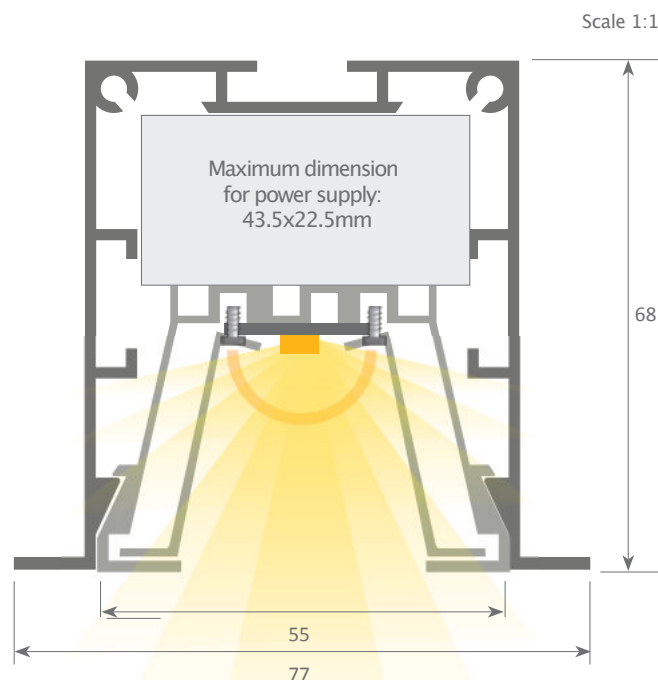

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.202Kg / Alloy: 6060 / Perimeter: 552mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5

Our PROFESSIONAL led profile series for recessing applications is manufactured in high purity aluminium and lacquered in textured white, black and grey. Drivers can be housed inside. The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety we recommend the fixing of a braided cable from the profile base to the dissipation tray. Both profile and cover are available in 3.4 metre lengths. We offer a 2 year guarantee on the profiles and covers.

KRAKOVIA ASYMMETRIC

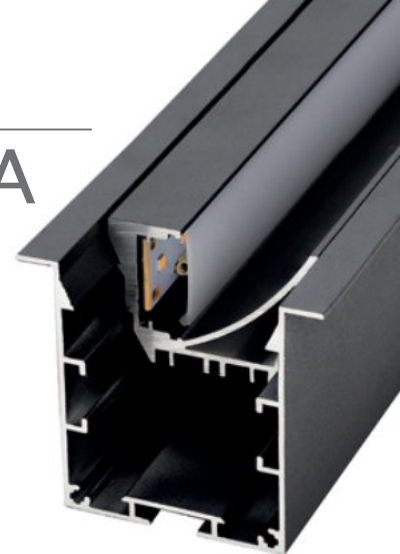

Aluminium profile

14.011	textured grey	3.40m
14.012	textured white	3.40m
14.013	textured black	3.40m



Trellis

14.022	textured white	1.124m
14.023	textured black	1.124m
14.024	textured grey	1.124m



Cover


18.103	frosted	3.40m
--------	---------	-------



Joint between profiles

22.044	steel	set of 2 units
--------	-------	----------------

Scale 1:1

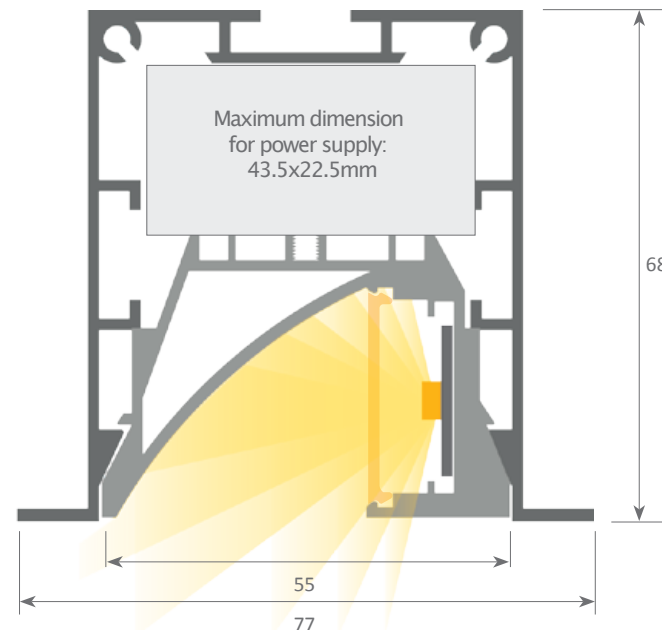

Aluminium endcaps

19.202	white
19.203	black



Clip

20.047	steel
--------	-------



Safety cable

22.039	steel	18 cm
--------	-------	-------



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.202Kg / Alloy: 6060 / Perimeter: 552mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5

Our PROFESSIONAL led profile series for recessing is manufactured in high purity aluminium and lacquered in textured white or grey. We recommend combining this profile with our frosted white cover. This is a large profile which has been designed to hold double rigid led strips in order to achieve high levels of luminosity (especially indicated for shopping malls, supermarkets, etc).

Drivers can be housed inside.

Profile and cover are available in lengths of 3.4 metres.

We offer a 2 year guarantee on profiles and covers.

ANDORRA



Aluminium profile

14.020 textured grey 3.40m
14.021 textured white 3.40m



Inner plate

22.045 aluminium 200cm



Cover

18.080 frosted 3.40m



Joint between profiles

22.044 steel set of 2 units

Scale 1:1



Aluminium endcaps

19.204 grey
19.205 white




Clip

20.048 steel



Plate support

22.047 steel

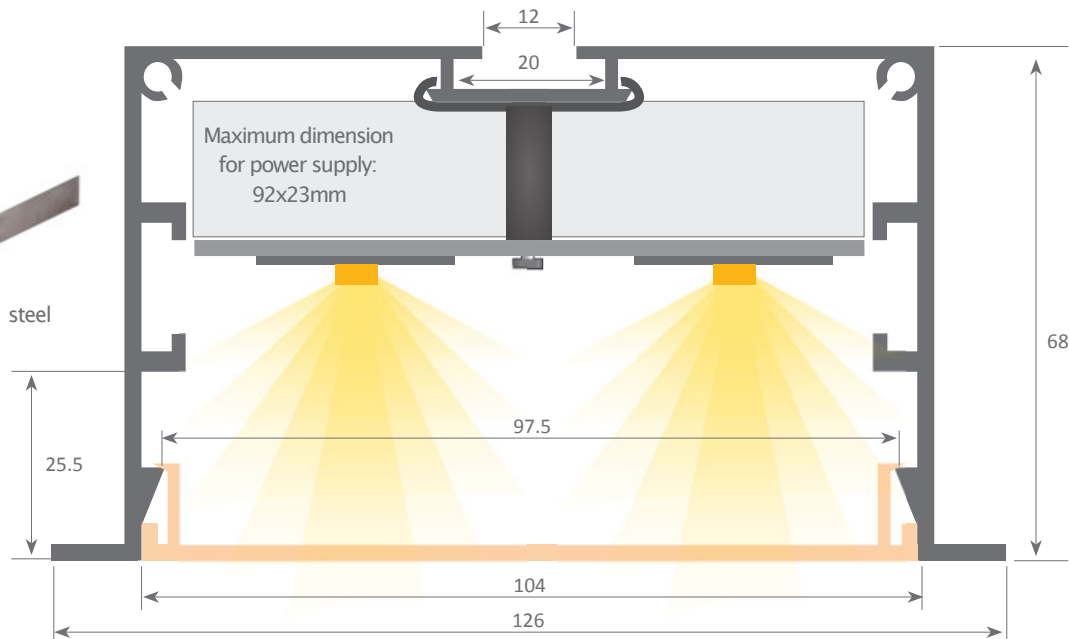

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.399kg / Alloy: 6060 / Perimeter: 650mm / Anodising minimum: 15 microns / Purity aluminium: 95-98% / Treatment: T-5