

CEILING RECESSED

LIMA RECESSED


Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI90+ <3SDCM
- UGR<10
- Constant current
- Indoor use: IP40


CREE 
LEDs




LIMA Recessed 4



LIMA Recessed 10



LIMA Recessed 21



Luminaire Colour: Trim/Mask



Standard

Model (LED Power)	CCT - Luminaire Lumen		CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 4W RC Standard <i>(LIMA 4 RC)</i>	<i>(27C0219)</i> 2700K - 219lm	<i>(80)</i> 80+	Fixed <i>(FX)</i>	<i>(15)</i> 15° <i>(30)</i> 30° <i>(50)</i> 50°	<i>(WW)</i> White/White <i>(WB)</i> White/Black <i>(BB)</i> Black/Black <i>(BW)</i> Black/White	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless**	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency	
	<i>(30C0235)</i> 3000K - 235lm							
	<i>(40C0250)</i> 4000K - 250lm	<i>(70)</i> 70+						
	<i>(65C0285)</i> 6500K - 285lm							
LIMA 10W RC Standard <i>(LIMA 10 RC)</i>	<i>(27C0551)</i> 2700K - 551lm	<i>(80)</i> 80+						
	<i>(30C0590)</i> 3000K - 590lm							
	<i>(40C0628)</i> 4000K - 628lm	<i>(70)</i> 70+						
	<i>(65C0716)</i> 6500K - 716lm							
LIMA 21W RC Standard <i>(LIMA 21 RC)</i>	<i>(27C1102)</i> 2700K - 1102lm	<i>(80)</i> 80+						
	<i>(30C1180)</i> 3000K - 1180lm							
	<i>(40C1257)</i> 4000K - 1257lm	<i>(70)</i> 70+						
	<i>(65C1433)</i> 6500K - 1433lm							

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 4W RC High Output (LIMA 4 RC)	(27C0320) 2700K - 320lm	(80) 80+	Fixed (FX)	(15) 15° (30) 30° (50) 50°	(WW) White/White (WB) White/Black (BB) Black/Black (BW) Black/White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless**	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
	(30C0320) 3000K - 320lm						
	(40C0341) 4000K - 341lm						
	(65C0359) 6500K - 359lm						
LIMA 10W RC High Output (LIMA 10 RC)	(27C0805) 2700K - 805lm						
	(30C0805) 3000K - 805lm						
	(40C0857) 4000K - 857lm						
	(65C0903) 6500K - 903lm						
LIMA 21W RC High Output (LIMA 21 RC)	(27C1610) 2700K - 1610lm						
	(30C1610) 3000K - 1610lm						
	(40C1714) 4000K - 1714lm						
	(65C1806) 6500K - 1806lm						

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
LIMA 21 RC - 40C1714 - 80 - FX - 50 - BW - DL - 00

LIMA RECESSED ADJUSTABLE

Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI90+ <3SDCM
- UGR<10
- Constant current
- Indoor use: IP40


CREE  **LEDs**




Luminaire Colour: Trim/Mask




Lima 42W RC
Double Adjustable




Lima 21W RC
Double Adjustable




Lima 21W RC
Single Adjustable





Lima 10W RC
Single Adjustable



Installation Type A



Installation Type B



Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 10W RC Single Adjustable Standard (LIMA 10 RC SA)	(27C0551) 2700K - 551lm (30C0590) 3000K - 590lm (40C0628) 4000K - 628lm (65C0716) 6500K - 716lm	(80) 80+ (70) 70+	Adjustable (AD)	(15) 15° (30) 30° (50) 50°	(WW) White/White (WB) White/Black (BB) Black/Black (BW) Black/White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless**	COVER (0<X>) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
LIMA 21W RC Single Adjustable Standard (LIMA 21RC SA)	(27C1102) 2700K - 1102lm (30C1180) 3000K - 1180lm (40C1257) 4000K - 1257lm (65C1433) 6500K - 1433lm	(80) 80+ (70) 70+					
LIMA 21W RC Double Adjustable Standard (LIMA 21 RC DA)	(27C1102) 2700K - 1102lm (30C1180) 3000K - 1180lm (40C1257) 4000K - 1257lm (65C1433) 6500K - 1433lm	(80) 80+ (70) 70+					
LIMA 42W RC Double Adjustable Standard (LIMA 42 RC DA)	(27C2204) 2700K - 2204lm (30C2360) 3000K - 2360lm (40C2514) 4000K - 2514lm (65C2866) 6500K - 2866lm	(80) 80+ (70) 70+					

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 10W RC Single Adjustable High Output (LIMA 10 RC SA)	(27C0805) 2700K - 805lm (30C0805) 3000K - 805lm (40C0857) 4000K - 857lm (65C0903) 6500K - 903lm	(80) 80+	Adjustable (AD)	(15) 15° (30) 30° (50) 50°	(WW) White/White (WB) White/Black (BB) Black/Black (BW) Black/White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless**	COVER (0<X>) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
LIMA 21W RC Single Adjustable High Output (LIMA 21RC SA)	(27C1610) 2700K - 1610lm (30C1610) 3000K - 1610lm (40C1714) 4000K - 1714lm (65C1806) 6500K - 1806lm						
LIMA 21W RC Double Adjustable High Output (LIMA 21 RC DA)	(27C1610) 2700K - 1610lm (30C1610) 3000K - 1610lm (40C1714) 4000K - 1714lm (65C1806) 6500K - 1806lm						
LIMA 42W RC Double Adjustable High Output (LIMA 42 RC DA)	(27C3220) 2700K - 3220lm (30C3220) 3000K - 3220lm (40C3428) 4000K - 3428lm (65C3612) 6500K - 3612lm						

* 2700K, 3000K & 4000K available also in CRI90+




** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

LIMA 21 RC DA - 40C1714 - 80 - AD - 50 - BW - DL - 00

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI90+ <3SDCM
- UGR<10
- Constant current
- Indoor use: IP40

CREE 
LEDs



Luminaire Colour: Mask



Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Mask	Dimming Option	Accessories			
LIMA 4W TR Standard <i>(LIMA 4 TR)</i>	<i>(27C0219)</i> 2700K - 219lm	<i>(80)</i> 80+	Fixed <i>(FX)</i>	<i>(15)</i> 15° <i>(30)</i> 30° <i>(50)</i> 50°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency			
	<i>(30C0235)</i> 3000K - 235lm					<i>(ND)</i> Non Dimmable				
	<i>(40C0250)</i> 4000K - 250lm	<i>(A1)</i> Analogue (1-10V)								
	<i>(65C0285)</i> 6500K - 285lm	<i>(DX)</i> DMX								
LIMA 10W TR Standard <i>(LIMA 10 TR)</i>	<i>(27C0551)</i> 2700K - 551lm	<i>(80)</i> 80+							<i>(DL)</i> DALI	<i>(PB)</i> Push Button
	<i>(30C0590)</i> 3000K - 590lm								<i>(PC)</i> Phase Cut	
	<i>(40C0628)</i> 4000K - 628lm	<i>(70)</i> 70+							<i>(WL)</i> Wireless**	
	<i>(65C0716)</i> 6500K - 716lm									
LIMA 21W TR Standard <i>(LIMA 21 TR)</i>	<i>(27C1102)</i> 2700K - 1102lm	<i>(80)</i> 80+								
	<i>(30C1180)</i> 3000K - 1180lm									
	<i>(40C1257)</i> 4000K - 1257lm	<i>(70)</i> 70+								
	<i>(65C1433)</i> 6500K - 1433lm									

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Mask	Dimming Option	Accessories
LIMA 4W TR High Output (LIMA 4 TR)	(27C0320) 2700K - 320lm	(80) 80+	Fixed (FX)	(15) 15° (30) 30° (50) 50°	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless**	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
	(30C0320) 3000K - 320lm						
	(40C0341) 4000K - 341lm						
	(65C0359) 6500K - 359lm						
LIMA 10W TR High Output (LIMA 10 TR)	(27C0805) 2700K - 805lm						
	(30C0805) 3000K - 805lm						
	(40C0857) 4000K - 857lm						
	(65C0903) 6500K - 903lm						
LIMA 21W TR High Output (LIMA 21 TR)	(27C1610) 2700K - 1610lm						
	(30C1610) 3000K - 1610lm						
	(40C1714) 4000K - 1714lm						
	(65C1806) 6500K - 1806lm						

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.


Ordering Code Example:
LIMA 21 TR - 40C1714 - 80 - FX - 50 - BW - DL - 00

LIMA IP44

Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications (for indoor use only).
- It includes models for recessed and trimless installations (for indoor use only).
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI90+ <3SDCM
- UGR<10
- Constant current
- Ingress Protection: IP44

CREE  **LEDs**

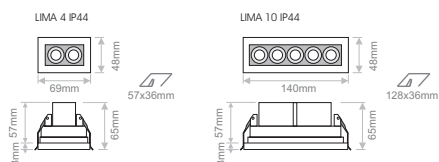

Luminaire Colour: Trim/Mask



Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories				
LIMA 4W IP44 Standard (LIMA 4 44RC)	(27C0208) 2700K - 208lm	(80) 80+	Fixed (FX)	(15) 15° (30) 30° (50) 50°	(WW) White/White (WB) White/Black (BB) Black/Black (BW) Black/White	(00) Without Driver	COVER (0X) Standard ↓ {XX} ↑ EXTRAS (X0) No Extras (X1) Emergency				
	(30C0223) 3000K - 223lm					(ND) Non Dimmable					
	(40C0238) 4000K - 238lm	(70) 70+				(A1) Analogue (1-10V)					
	(65C0271) 6500K - 271lm					(DX) DMX					
LIMA 10W IP44 Standard (LIMA 10 44RC)	(27C0523) 2700K - 523lm	(80) 80+								(DL) DALI	
	(30C0560) 3000K - 560lm									(PB) Push Button	
	(40C0597) 4000K - 597lm	(70) 70+								(PC) Phase Cut	
	(65C0680) 6500K - 680lm									(WL) Wireless**	

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 4W IP44 High Output (LIMA 4 44RC)	(27C0304) 2700K - 304lm	(80) 80+	Fixed (FX)	(15) 15° (30) 30° (50) 50°	(WW) White/White (WB) White/Black (BB) Black/Black (BW) Black/White	(00) Without Driver	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency
	(30C0304) 3000K - 304lm					(ND) Non Dimmable	
	(40C0324) 4000K - 324lm					(A1) Analogue (1-10V)	
	(65C0341) 6500K - 341lm					(DX) DMX	
LIMA 10W IP44 High Output (LIMA 10 44RC)	(27C0765) 2700K - 765lm					(DL) DALI	
	(30C0765) 3000K - 765lm					(PB) Push Button	
	(40C0814) 4000K - 814lm					(PC) Phase Cut	
	(65C0858) 6500K - 858lm					(WL) Wireless**	

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


LIMA 10 44RC - 40C0814 - 80 - FX - 50 - WB - DL - 00

LIMA IP65


Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications (for indoor use only).
- It includes models for recessed and trimless installations (for indoor use only).
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI90+ <3SDCM
- UGR<10
- Constant current
- Ingress Protection: IP65

CREE 
LEDs

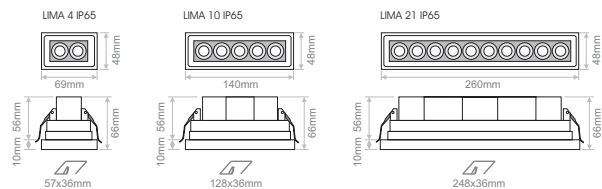

Luminaire Colour: Trim/Mask



Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 4W IP65 Standard (LIMA 4 65RC)	<i>(27C0208)</i> 2700K - 208lm <i>(30C0223)</i> 3000K - 223lm <i>(40C0238)</i> 4000K - 238lm <i>(65C0271)</i> 6500K - 271lm	<i>(80)</i> 80+ <i>(70)</i> 70+	Fixed (FX)	<i>(15)</i> 15° <i>(30)</i> 30° <i>(50)</i> 50°	<i>(WW)</i> White/White <i>(WB)</i> White/Black <i>(BB)</i> Black/Black <i>(BW)</i> Black/White	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless**	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency
LIMA 10W IP65 Standard (LIMA 10 65RC)	<i>(27C0523)</i> 2700K - 523lm <i>(30C0560)</i> 3000K - 560lm <i>(40C0597)</i> 4000K - 597lm <i>(65C0680)</i> 6500K - 680lm	<i>(80)</i> 80+ <i>(70)</i> 70+					
LIMA 21W IP65 Standard (LIMA 21 65RC)	<i>(27C1047)</i> 2700K - 1047lm <i>(30C1121)</i> 3000K - 1121lm <i>(40C1194)</i> 4000K - 1194lm <i>(65C1361)</i> 6500K - 1361lm	<i>(80)</i> 80+ <i>(70)</i> 70+					

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA 4W IP65 High Output (LIMA 4 65RC)	<i>(27C0304)</i> 2700K - 304lm <i>(30C0304)</i> 3000K - 304lm <i>(40C0324)</i> 4000K - 324lm <i>(65C0341)</i> 6500K - 341lm	<i>(80)</i> 80+	Fixed (FX)	<i>(15)</i> 15° <i>(30)</i> 30° <i>(50)</i> 50°	<i>(WW)</i> White/White <i>(WB)</i> White/Black <i>(BB)</i> Black/Black <i>(BW)</i> Black/White	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless**	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency
LIMA 10W IP65 High Output (LIMA 10 65RC)	<i>(27C0765)</i> 2700K - 765lm <i>(30C0765)</i> 3000K - 765lm <i>(40C0814)</i> 4000K - 814lm <i>(65C0858)</i> 6500K - 858lm						
LIMA 21W IP65 High Output (LIMA 21 65RC)	<i>(27C1530)</i> 2700K - 1530lm <i>(30C1530)</i> 3000K - 1530lm <i>(40C1628)</i> 4000K - 1628lm <i>(65C1715)</i> 6500K - 1715lm						

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

LIMA 21 65RC - 40C1628 - 80 - FX - 50 - WW - DL - 00

LIMA WASH RECESSED


Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI80+ <5SDCM and CRI90+ <3SDCM
- Constant current
- Indoor use: IP40


CREE  **LEDs**



LIMA WASH 10



LIMA WASH 21



Luminaire Colour: Trim/Mask



Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA WASH 10W RC Standard (LIMA W10 RC ST)	[27C0240] 2700K - 240lm [30C0257] 3000K - 257lm [40C0274] 4000K - 274lm [65C0313] 6500K - 313lm	(80) 80+ (70) 70+	Fixed (FX)	(45) 45°x75°	[WB] White/Black [BB] Black/Black	[00] Without Driver [ND] Non Dimmable [A1] Analogue (1-10V) [DX] DMX [DL] DALI [PB] Push Button [PC] Phase Cut [WL] Wireless**	COVER [0X] Standard ↓ [XX] ↑ EXTRAS [X0] No Extras [X1] Emergency
LIMA WASH 21W RC Standard (LIMA W21 RC ST)	[27C0480] 2700K - 480lm [30C0514] 3000K - 514lm [40C0548] 4000K - 548lm [65C0626] 6500K - 626lm	(80) 80+ (70) 70+					

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim/Mask	Dimming Option	Accessories
LIMA WASH 10W RC High Output (LIMA W10 RC HO)	[27C0354] 2700K - 354lm	(80) 80+	Fixed (FX)	(45) 45°x75°	[WB] White/Black [BB] Black/Black	[00] Without Driver	COVER [0X] Standard ↓ (XX) ↑ EXTRAS [X0] No Extras [X1] Emergency
	[30C0354] 3000K - 354lm					[ND] Non Dimmable	
	[40C0377] 4000K - 377lm					[A1] Analogue (1-10V)	
	[65C0397] 6500K - 397lm					[DX] DMX [DL] DALI [PB] Push Button [PC] Phase Cut [WL] Wireless**	
LIMA WASH 21W RC High Output (LIMA W21 RC HO)	[27C0708] 2700K - 708lm	(80) 80+	Fixed (FX)	(45) 45°x75°	[WB] White/Black [BB] Black/Black	[00] Without Driver	COVER [0X] Standard ↓ (XX) ↑ EXTRAS [X0] No Extras [X1] Emergency
	[30C0708] 3000K - 708lm					[ND] Non Dimmable	
	[40C0754] 4000K - 754lm					[A1] Analogue (1-10V)	
	[65C0794] 6500K - 794lm					[DX] DMX [DL] DALI [PB] Push Button [PC] Phase Cut [WL] Wireless**	



* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

LIMA W10 RC HO - 40C0377 - 80 - FX - 45 - WB - DL - 00

45°x75°



LIMA DIFFUSED RECESSED

Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI80+ <5SDCM and CRI90+ <3SDCM
- Constant current
- Indoor use: IP40


CREE 
LEDs




Luminaire Colour:




LIMA Diffused Recessed 4



LIMA Diffused Recessed 10



LIMA Diffused Recessed 21

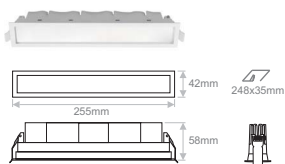

Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour:	Dimming Option	Accessories
LIMA Diffused 4W RC Standard (LIMA DF 4 RC ST)	(27C0149) 2700K - 149lm (30C0159) 3000K - 159lm (40C0169) 4000K - 169lm (65C0194) 6500K - 194lm	(80) 80+ (70) 70+	Fixed (FX)	(DF) Diffused	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless**	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
LIMA Diffused 10W RC Standard (LIMA DF 10 RC ST)	(27C0371) 2700K - 371lm (30C0397) 3000K - 397lm (40C0423) 4000K - 423lm (65C0483) 6500K - 483lm	(80) 80+ (70) 70+					
LIMA Diffused 21W RC Standard (LIMA DF 21 RC ST)	(27C0742) 2700K - 742lm (30C0794) 3000K - 794lm (40C0846) 4000K - 846lm (65C0967) 6500K - 967lm	(80) 80+ (70) 70+					

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.



High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour:	Dimming Option	Accessories
LIMA Diffused 4W RC High Output (LIMA DF 4 RC HO)	(27C0223) 2700K - 223lm (30C0223) 3000K - 223lm (40C0237) 4000K - 237lm (65C0250) 6500K - 250lm	(80) 80+	Fixed (FX)	(DF) Diffused	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless**	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
LIMA Diffused 10W RC High Output (LIMA DF 10 RC HO)	(27C0558) 2700K - 558lm (30C0558) 3000K - 558lm (40C0594) 4000K - 594lm (65C0626) 6500K - 626lm						
LIMA Diffused 21W RC High Output (LIMA DF 21 RC HO)	(27C1116) 2700K - 1116lm (30C1116) 3000K - 1116lm (40C1188) 4000K - 1188lm (65C1252) 6500K - 1252lm						

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Diffused (96°)



Ordering Code Example:

LIMA DF 21 RC HO - 40C1188 - 80 - FX - DF - WH - DL - 00

LIMA DIFFUSED TRIMLESS

Ceiling Recessed 

- Lima series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- It is available in different beam angles, diffused and wall wash applications.
- It includes models for recessed and trimless installations.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI80+ <5SDCM and CRI90+ <3SDCM
- Constant current
- Indoor use: IP40


CREE  **LEDs**




Luminaire Colour:




LIMA Trimless 4



LIMA Trimless 10



LIMA Trimless 21



Standard

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour:	Dimming Option	Accessories
LIMA Diffused 4W TR Standard <i>(LIMA DF 4 TR ST)</i>	<i>(27C0149)</i> 2700K - 149lm <i>(30C0159)</i> 3000K - 159lm <i>(40C0169)</i> 4000K - 169lm <i>(65C0194)</i> 6500K - 194lm	<i>(80)</i> 80+ <i>(70)</i> 70+	Fixed <i>(FX)</i>	<i>(DF)</i> Diffused	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless**	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency
LIMA Diffused 10W TR Standard <i>(LIMA DF 10 TR ST)</i>	<i>(27C0371)</i> 2700K - 371lm <i>(30C0397)</i> 3000K - 397lm <i>(40C0423)</i> 4000K - 423lm <i>(65C0483)</i> 6500K - 483lm	<i>(80)</i> 80+ <i>(70)</i> 70+					
LIMA Diffused 21W TR Standard <i>(LIMA DF 21 TR ST)</i>	<i>(27C0742)</i> 2700K - 742lm <i>(30C0794)</i> 3000K - 794lm <i>(40C0846)</i> 4000K - 846lm <i>(65C0967)</i> 6500K - 967lm	<i>(80)</i> 80+ <i>(70)</i> 70+					

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.



High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour:	Dimming Option	Accessories
LIMA Diffused 4W TR High Output <i>(LIMA DF 4 TR HO)</i>	<i>(27C0223)</i> 2700K - 223lm <i>(30C0223)</i> 3000K - 223lm <i>(40C0237)</i> 4000K - 237lm <i>(65C0250)</i> 6500K - 250lm	<i>(80)</i> 80+	Fixed <i>(FX)</i>	<i>(DF)</i> Diffused	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless**	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency
LIMA Diffused 10W TR High Output <i>(LIMA DF 10 TR HO)</i>	<i>(27C0558)</i> 2700K - 558lm <i>(30C0558)</i> 3000K - 558lm <i>(40C0594)</i> 4000K - 594lm <i>(65C0626)</i> 6500K - 626lm						
LIMA Diffused 21W TR High Output <i>(LIMA DF 21 TR HO)</i>	<i>(27C1116)</i> 2700K - 1116lm <i>(30C1116)</i> 3000K - 1116lm <i>(40C1188)</i> 4000K - 1188lm <i>(65C1252)</i> 6500K - 1252lm						

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Diffused (96°)



Ordering Code Example:

LIMA DF 21 TR HO - 40C1188 - 80 - FX - DF - WH - DL - 00








LANE RECESSED

Ceiling Recessed 

- Lane series is a complete series of die cast aluminium luminaires.
- It is available in different wattage consumption and each model is offered in different lumen outputs.
- In terms of LED, it is available in different CCTs as standard and it can also be offered upon request (depending on the model) in tunable white TW and individual colours R,G,B,A.
- CRI90+ <3SDCM
- UGR<10
- Constant current
- Indoor use: IP40

CREE  **LEDs**



LANE 2W  36x36mm	LANE 4W  65x36mm	LANE 10.5W  137x36mm	LANE 21W  271x36mm	LANE 31W  403x36mm
---	---	---	---	---

Luminaire Colour: Trim



Standard

Model (LED Power)	CCT - Luminaire Lumen		CRI*	Type	Beam Angle	Luminaire Colour: Trim	Dimming Option	Accessories
LANE 2W RC Standard <i>(LANE 2 RC)</i>	<i>[27C0123]</i>	2700K - 123lm	<i>{80}</i> 80+	Fixed <i>{FX}</i>	<i>{15}</i> 15° <i>{30}</i> 30° <i>{45}</i> 45°	<i>{WH}</i> White <i>{BL}</i> Black	<i>{00}</i> Without Driver <i>{ND}</i> Non Dimmable <i>{A1}</i> Analogue (1-10V) <i>{DX}</i> DMX <i>{DL}</i> DALI <i>{PB}</i> Push Button <i>{PC}</i> Phase Cut <i>{WL}</i> Wireless**	COVER <i>{0X}</i> Standard ↓ <i>{XX}</i> EXTRAS <i>{X0}</i> No Extras <i>{X1}</i> Emergency
	<i>[30C0132]</i>	3000K - 132lm						
	<i>[40C0140]</i>	4000K - 140lm	<i>{70}</i> 70+					
	<i>[65C0160]</i>	6500K - 160lm						
LANE 4W RC Standard <i>(LANE 4 RC)</i>	<i>[27C0247]</i>	2700K - 247lm	<i>{80}</i> 80+					
	<i>[30C0265]</i>	3000K - 265lm						
	<i>[40C0282]</i>	4000K - 282lm	<i>{70}</i> 70+					
	<i>[65C0322]</i>	6500K - 322lm						
LANE 10.5W RC Standard <i>(LANE 10 RC)</i>	<i>[27C0617]</i>	2700K - 617lm	<i>{80}</i> 80+					
	<i>[30C0660]</i>	3000K - 660lm						
	<i>[40C0703]</i>	4000K - 703lm	<i>{70}</i> 70+					
	<i>[65C0802]</i>	6500K - 802lm						
LANE 21W RC Standard <i>(LANE 21 RC)</i>	<i>[27C1233]</i>	2700K - 1233lm	<i>{80}</i> 80+					
	<i>[30C1320]</i>	3000K - 1320lm						
	<i>[40C1406]</i>	4000K - 1406lm	<i>{70}</i> 70+					
	<i>[65C1604]</i>	6500K - 1604lm						
LANE 31W RC Standard <i>(LANE 31 RC)</i>	<i>[27C1855]</i>	2700K - 1855lm	<i>{80}</i> 80+					
	<i>[30C1985]</i>	3000K - 1985lm						
	<i>[40C2114]</i>	4000K - 2114lm	<i>{70}</i> 70+					
	<i>[65C2411]</i>	6500K - 2411lm						

* 2700K & 3000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

High Output

Model (LED Power)	CCT - Luminaire Lumen	CRI*	Type	Beam Angle	Luminaire Colour: Trim	Dimming Option	Accessories
LANE 2W RC High Output (LANE 2 RC)	[27C0178] 2700K - 178lm	{80} 80+	Fixed (FX)	{15} 15° {30} 30° {45} 45°	{WH} White {BL} Black	{00} Without Driver {ND} Non Dimmable {A1} Analogue (1-10V) {DX} DMX {DL} DALI {PB} Push Button {PC} Phase Cut {WL} Wireless**	COVER {0X} Standard ↓ {XX} EXTRAS {X0} No Extras {X1} Emergency
	[30C0178] 3000K - 178lm						
	[40C0189] 4000K - 189lm						
	[65C0200] 6500K - 200lm						
LANE 4W RC High Output (LANE 4 RC)	[27C0360] 2700K - 360lm						
	[30C0360] 3000K - 360lm						
	[40C0383] 4000K - 383lm						
	[65C0404] 6500K - 404lm						
LANE 10.5W RC High Output (LANE 10 RC)	[27C0890] 2700K - 890lm						
	[30C0890] 3000K - 890lm						
	[40C0947] 4000K - 947lm						
	[65C0999] 6500K - 999lm						
LANE 21W RC High Output (LANE 21 RC)	[27C1785] 2700K - 1785lm						
	[30C1785] 3000K - 1785lm						
	[40C1900] 4000K - 1900lm						
	[65C2003] 6500K - 2003lm						
LANE 31W RC High Output (LANE 31 RC)	[27C2675] 2700K - 2675lm						
	[30C2675] 3000K - 2675lm						
	[40C2848] 4000K - 2848lm						
	[65C3002] 6500K - 3002lm						

* 2700K, 3000K & 4000K available also in CRI90+

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

LANE 21 RC - 40C1900 - 80 - FX - 15 - BL - DL - 00

LUPO ROUND WASH

Ceiling Recessed 



LIGHTSOURCE BY
LUMINUS


Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option	Accessories				
LUPO ROUND WASH 9W <i>(LUPO RW09)</i>	<i>(27L0950)</i> 2700K - 950lm	Fixed <i>(FX)</i>	<i>(95)</i> 95	<i>(15)</i> 15° <i>(38)</i> 38° <i>(60)</i> 60°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non-Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(WL)</i> Wireless*	COVER <i>(00)</i> Standard ↓ <i>(XX)</i> ↑ EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit				
	<i>(30L1010)</i> 3000K - 1010lm										
	<i>(35L1040)</i> 3500K - 1040lm										
	<i>(40L1080)</i> 4000K - 1080lm										
	<i>(50L1090)</i> 5000K - 1090lm										
LUPO ROUND WASH 13W <i>(LUPO RW13)</i>	<i>(27L1240)</i> 2700K - 1240lm										
	<i>(30L1325)</i> 3000K - 1325lm										
	<i>(35L1365)</i> 3500K - 1365lm										
	<i>(40L1420)</i> 4000K - 1420lm										
	<i>(50L1430)</i> 5000K - 1430lm										
LUPO ROUND WASH 38W <i>(LUPO RW38)</i>	<i>(27L4180)</i> 2700K - 4180lm							<i>(15)</i> 15° <i>(24)</i> 24°			
	<i>(30L4425)</i> 3000K - 4425lm										
	<i>(35L4570)</i> 3500K - 4570lm										
	<i>(40L4712)</i> 4000K - 4712lm										
	<i>(50L4800)</i> 5000K - 4800lm										

* The wireless dimming option includes driver and Bluetooth dimming accessory.


Ordering Code Example:

LUPO RW38 - 30L4425 - FX - 95 - 24 - WH - ND - 00

LUPO ROUND WASH 9W
LUPO ROUND WASH 13W

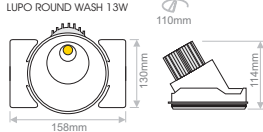


LUPO ROUND WASH 38W

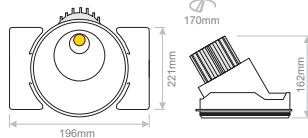

LUPO ROUND WASH 9W
LUPO ROUND WASH 13W

LUPO ROUND WASH 38W


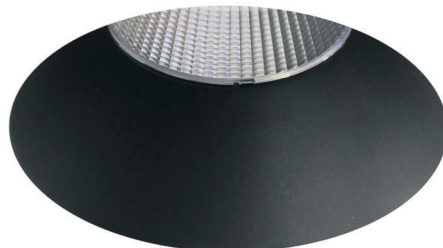


Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option	Accessories					
LUPO ROUND 9W <i>(LUPO R09)</i>	<i>(27L0950)</i> 2700K - 950lm	Fixed <i>(FX)</i>	<i>(95)</i> 95	<i>(15)</i> 15° <i>(38)</i> 38° <i>(60)</i> 60°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non-Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(WL)</i> Wireless*	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> ↑ EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit					
	<i>(30L1010)</i> 3000K - 1010lm											
	<i>(35L1040)</i> 3500K - 1040lm											
	<i>(40L1080)</i> 4000K - 1080lm											
	<i>(50L1090)</i> 5000K - 1090lm											
LUPO ROUND 13W <i>(LUPO R13)</i>	<i>(27L1240)</i> 2700K - 1240lm											
	<i>(30L1325)</i> 3000K - 1325lm											
	<i>(35L1365)</i> 3500K - 1365lm											
	<i>(40L1420)</i> 4000K - 1420lm											
	<i>(50L1430)</i> 5000K - 1430lm											
LUPO ROUND 38W <i>(LUPO R38)</i>	<i>(27L4180)</i> 2700K - 4180lm								<i>(15)</i> 15° <i>(24)</i> 24°			
	<i>(30L4425)</i> 3000K - 4425lm											
	<i>(35L4570)</i> 3500K - 4570lm											
	<i>(40L4712)</i> 4000K - 4712lm											
	<i>(50L4800)</i> 5000K - 4800lm											

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

LUPO R38 - 30L4425 - FX - 95 - 24 - WH - ND - 00



LUPO SQUARE WASH

Ceiling Recessed 




LIGHTSOURCE BY
LUMINUS

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option	Accessories					
LUPO SQUARE WASH 9W <i>(LUPO SW09)</i>	<i>(27L0950)</i> 2700K - 950lm	Fixed <i>(FX)</i>	<i>(95)</i> 95	<i>(15)</i> 15° <i>(38)</i> 38° <i>(60)</i> 60°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non-Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(WL)</i> Wireless*	COVER <i>(00)</i> Standard ↓ <i>(XX)</i> ↑ EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit					
	<i>(30L1010)</i> 3000K - 1010lm											
	<i>(35L1040)</i> 3500K - 1040lm											
	<i>(40L1080)</i> 4000K - 1080lm											
	<i>(50L1090)</i> 5000K - 1090lm											
LUPO SQUARE WASH 13W <i>(LUPO SW13)</i>	<i>(27L1240)</i> 2700K - 1240lm											
	<i>(30L1325)</i> 3000K - 1325lm											
	<i>(35L1365)</i> 3500K - 1365lm											
	<i>(40L1420)</i> 4000K - 1420lm											
	<i>(50L1430)</i> 5000K - 1430lm											
LUPO SQUARE WASH 38W <i>(LUPO SW38)</i>	<i>(27L4180)</i> 2700K - 4180lm								<i>(15)</i> 15° <i>(24)</i> 24°			
	<i>(30L4425)</i> 3000K - 4425lm											
	<i>(35L4570)</i> 3500K - 4570lm											
	<i>(40L4712)</i> 4000K - 4712lm											
	<i>(50L4800)</i> 5000K - 4800lm											


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
LUPO SW13 - 40L1420 - FX - 95 - 60 - BL - ND - 00

LUPO SQUARE WASH 9W
LUPO SQUARE WASH 13W



LUPO SQUARE WASH 38W






LIGHTSOURCE BY
LUMINUS

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option	Accessories					
LUPO SQUARE 9W <i>(LUPO S09)</i>	<i>(27L0950)</i> 2700K - 950lm	Fixed <i>(FX)</i>	<i>(95)</i> 95	<i>(15)</i> 15° <i>(38)</i> 38° <i>(60)</i> 60°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non-Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(WL)</i> Wireless*	COVER <i>(0%)</i> Standard ↓ XX ↑ EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit					
	<i>(30L1010)</i> 3000K - 1010lm											
	<i>(35L1040)</i> 3500K - 1040lm											
	<i>(40L1080)</i> 4000K - 1080lm											
	<i>(50L1090)</i> 5000K - 1090lm											
LUPO SQUARE 13W <i>(LUPO S13)</i>	<i>(27L1240)</i> 2700K - 1240lm											
	<i>(30L1325)</i> 3000K - 1325lm											
	<i>(35L1365)</i> 3500K - 1365lm											
	<i>(40L1420)</i> 4000K - 1420lm											
	<i>(50L1430)</i> 5000K - 1430lm											
LUPO SQUARE 38W <i>(LUPO S38)</i>	<i>(27L4180)</i> 2700K - 4180lm								<i>(15)</i> 15° <i>(24)</i> 24°			
	<i>(30L4425)</i> 3000K - 4425lm											
	<i>(35L4570)</i> 3500K - 4570lm											
	<i>(40L4712)</i> 4000K - 4712lm											
	<i>(50L4800)</i> 5000K - 4800lm											


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
LUPO S13 - 40L1420 - FX - 95 - 60 - BL - ND - 00

LUPO SQUARE 9W
LUPO SQUARE 13W



LUPO SQUARE 38W

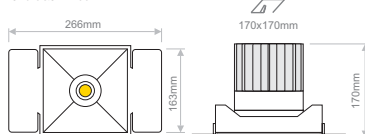





MERLYN XL

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.




LIGHTSOURCE BY
LUMINUS

Model (LED Power)	Colour Temperature - LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MERLYN XL ROUND 18W (MERLYN XLR18)	(27L2000) 2700K - 2000lm (30L2115) 3000K - 2115lm (35L2177) 3500K - 2177lm (40L2250) 4000K - 2250lm (50L2313) 5000K - 2313lm	(AD) Adjustable	(95) 95	(15) 15°	(WH) White (BL) Black	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb (3X) Line spread lens (4X) Softening lens ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
MERLYN XL SQUARE 18W (MERLYN XLS18)				(24) 24°		(ND) Non Dimmable	
		(38) 38°	(A1) Analogue (1-10V)				
			(DX) DMX				
			(DL) DALI				
MERLYN XL ROUND 25W (MERLYN XLR25)	(27L2613) 2700K - 2613lm (30L2763) 3000K - 2763lm (35L2845) 3500K - 2845lm (40L2940) 4000K - 2940lm (50L3022) 5000K - 3022lm					(WL) Wireless **	
MERLYN XL SQUARE 25W (MERLYN XLS25)							

Ordering Code Example:

MERLYN XLR25 - 40L2940 - AD - 95 - 15 - WH - A1 - 00

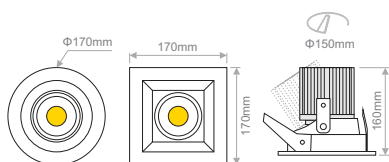


- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.



Model (LED Power)	Colour Temperature - LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MERLYN ROUND 9W <i>(MERLYN R09)</i>	<i>(27L0958)</i> 2700K - 958lm <i>(30L1020)</i> 3000K - 1020lm <i>(35L1051)</i> 3500K - 1051lm <i>(40L1093)</i> 4000K - 1093lm <i>(50L1103)</i> 5000K - 1103lm	Adjustable	[95] 95	<i>(15)</i> 15° <i>(24)</i> 24° <i>(38)</i> 38°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(WL)</i> Wireless **	COVER <i>(0X)</i> Standard <i>(2X)</i> Honeycomb <i>(3X)</i> Line spread lens <i>(4X)</i> Softening lens ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
MERLYN ROUND 13W <i>(MERLYN R13)</i>	<i>(27L1252)</i> 2700K - 1252lm <i>(30L1334)</i> 3000K - 1334lm <i>(35L1375)</i> 3500K - 1375lm <i>(40L1429)</i> 4000K - 1429lm <i>(50L1443)</i> 5000K - 1443lm						
MERLYN SQUARE 9W <i>(MERLYN S09)</i>							
MERLYN SQUARE 13W <i>(MERLYN S13)</i>							

Ordering Code Example:

MERLYN R09 - 30L1020 - AD - 95 - 38 - BL - A1 - 00

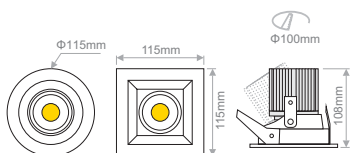

MERLYN WD

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L90/B10 50.000h
- IP40



Warm Dimming
1800K to 3000K


LIGHTSOURCE BY
bridgelux.

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MERLYN ROUND WD 6.0W (MERLYN R WD06)	(1830B0518) 1800K-3000K 518lm		(AD) Adjustable	(95) 95	(20) 20 (38) 38	(WH) White (BL) Black	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0X) Standard (2X) Honeycomb (3X) Line spread lens (4X) Softening lens (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
MERLYN SQUARE WD 6.0W (MERLYN S WD06)								
MERLYN ROUND WD 11.8W (MERLYN R WD12)	(1830B1045) 1800K-3000K 1045lm							
MERLYN SQUARE WD 11.8W (MERLYN S WD12)								


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


MERLYN R WD12 - 1830B1045 - AD - 95 - 38 - WH - DL - 00

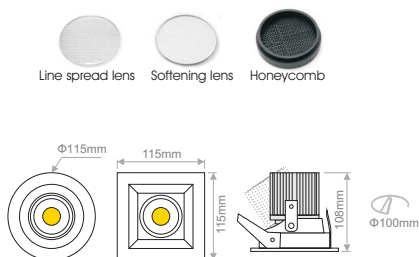

Warm dimming 3000K to 1800K (6W)



Warm dimming 3000K to 1800K (12W)



- Ceiling recessed luminaire, easy to use.
- IP44: front phase only / with glass.
- High antiglare rate due to its depth.
- Material : aluminium die cast.
- Variety of colour combinations.
- Variety of accessories: honeycomb/spread lens/soft lens/ line spread lens/ spread lens



Model	Outer Trim	Trim Colour	Type	Lamp Holder
MERLYN IP44 RETROFIT (MERLYN44 RE)	(RD) Round (SQ) Square	(WW) White-White	(FX) Fixed (AD) Adjustable	(G1) GU10
		(WB) White-Black		
		(WG) White-Gold		
		(BB) Black-Black		
		(BG) Black-Gold		



Ordering Code Example: MERLYN44 RE-RD-BG-FX-G1



Inner ring for accessories



Honeycomb



Linear Spread



Softening Lens



Spread Lens




White-White White-Black White-Gold Black-Black Black-Gold



Adjustable GU10

Fixed GU10



IP44

IP44



MERLYN IP44 B



- Ceiling recessed luminaire, easy to use.
- IP44: front phase only / with glass.
- High antiglare rate due to its depth.
- Material : aluminium die cast.
- Variety of colour combinations.
- Variety of accessories: honeycomb/spread lens/soft lens/ line spread lens/ spread lens



LIGHTSOURCE BY
bridgelux.


Model (LED Power)	Colour Temperature* -	Initial LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Accessories
MERLYN IP44 B ROUND 6.1W (MERLYN44 BR6)	(27B0812) 2700K - 812lm (30B0845) 3000K - 845lm (40B0879) 4000K - 879lm			(80) 80				
MERLYN IP44 B SQUARE 6.1W (MERLYN44 BS6)	(27B0677) 2700K - 677lm (30B0705) 3000K - 705lm (40B0733) 4000K - 733lm		(AD) Adjustable (FX) Fixed	(90) 90	(16) 16° (25) 25° (36) 36° (50) 50°	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1..10V) (DX) DMX (DL) DALI (PS) Push Switch (PC) Phase Cut (WL) Wireless ***	(0X) Standard (1X) Honeycomb (2X) Linear Spread (3X) Softening Lens (4X) Spread Lens ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
MERLYN IP44 B ROUND 10.3W (MERLYN44 BR10)	(27B1379) 2700K - 1379lm (30B1435) 3000K - 1435lm (40B1479) 4000K - 1479lm			(80) 80				
MERLYN IP44 B SQUARE 10.3W (MERLYN44 BS10)	(27B1138) 2700K - 1138lm (30B1180) 3000K - 1180lm (40B1265) 4000K - 1265lm			(90) 90				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** Other RAL colours available upon request

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: MERLYN44 BR10-30B1435-FX-80-25-WH-ND-00

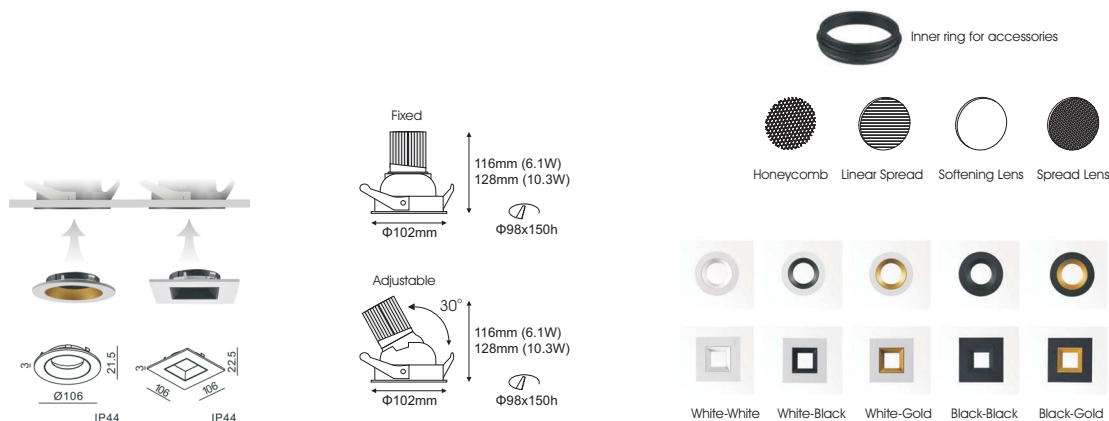



Ceiling Recessed

MERLYN IP44 B WD

- Ceiling recessed luminaire, easy to use.
- IP44: front phase only / with glass.
- High antiglare rate due to its depth.
- Material : aluminium die cast.
- Variety of colour combinations.
- Variety of accessories: honeycomb/spread lens/soft lens/ line spread lens/ spread lens



Warm Dimming
1800K to 3000K


LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Accessories
MERLYN IP44 B WD ROUND 6.1W (MERLYN44 BWDR6)	{B0518} 1800K-3000K 518lm		{AD} Adjustable {FX} Fixed	{95} 95	{16} 16° {25} 25° {36} 36° {50} 50°	{WH} White {BL} Black	{A1} Analogue (1..10V) {DL} DALI {PC} Phase Cut {WL} Wireless **	{0X} Standard {1X} Honeycomb {2X} Linear Spread {3X} Softening Lens {4X} Spread Lens {XX} EXTRAS {0} No Extras {1} Emergency Kit
MERLYN IP44 B WD SQUARE 6.1W (MERLYN44 BWDS6)								



* Other RAL colours available upon request

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Warm dimming 3000K to 1800K (6W)



Ordering Code Example: MERLYN44 BWDS6-B0518-FX-80-20-WH-ND-00



Inner ring for accessories



- 2-3 SDCM
- L90/B10 50.000h




LIGHTSOURCE BY
bridgelux


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA RECESSED ROUND 10.3W (VERONA R RD10)	(27B1365) 2700K - 1365lm (30B1435) 3000K - 1435lm (40B1479) 4000K - 1479lm (57B1550) 5700K - 1550lm		Adjustable	(80) 80		(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0) Standard ↓ (XX) EXTRAS (0) No Extras (1) Emergency
VERONA RECESSED SQUARE 10.3W (VERONA R SQ10)								
VERONA RECESSED ROUND 10.3W (VERONA R RD10)	(27B1138) 2700K - 1138lm (30B1180) 3000K - 1180lm (40B1265) 4000K - 1265lm			(90) 90	(24) 24° (32) 32°			
VERONA RECESSED SQUARE 10.3W (VERONA R SQ10)								
VERONA RECESSED ROUND 10.6W (VERONA R RD11)	(27B0973) 2700K - 973lm (30B1038) 3000K - 1038lm			(97) 97				
VERONA RECESSED SQUARE 10.6W (VERONA R SQ11)								

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 VERONA R RD10 - 40B1265 - AD - 90 - 24 - WH - DX - 00

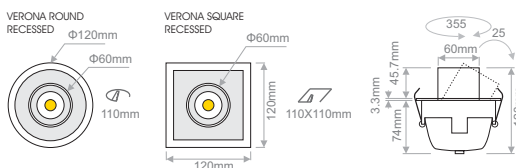

- 2-3 SDCM
- L90/B10 50.000h

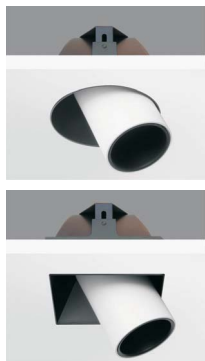

LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA TRIMLESS ROUND 10.3W (VERONA T RD10)	(27B1365) 2700K - 1365lm (30B1435) 3000K - 1435lm (40B1479) 4000K - 1479lm (57B1550) 5700K - 1550lm			(80) 80				
VERONA TRIMLESS SQUARE 10.3W (VERONA T SQ10)								
VERONA TRIMLESS ROUND 10.3W (VERONA T RD10)	(27B1138) 2700K - 1138lm (30B1180) 3000K - 1180lm (40B1265) 4000K - 1265lm		(AD) Adjustable	(90) 90	(24) 24° (32) 32°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (00) Standard (XX) EXTRAS (X0) No Extras (X1) Emergency
VERONA TRIMLESS ROUND 10.6W (VERONA T RD11)	(27B0973) 2700K - 973lm (30B1038) 3000K - 1038lm			(97) 97				
VERONA TRIMLESS SQUARE 10.6W (VERONA T SQ11)								


* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:

VERONA T RD10 - 40B1265 - AD - 90 - 24 - WH - DX - 00

VERONA ROUND TRIMLESS



VERONA SQUARE TRIMLESS



VERONA ROUND TRIMLESS

VERONA SQUARE TRIMLESS

VERONA SP

Ceiling Recessed 

- 2-3 SDCM
- L90/B10 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA SPOT 10.3W (VERONA SP 10)	(27B1365)	2700K - 1365lm	Adjustable	(80) 80	(24) 24° (32) 32°	(WH) White	(00) Without Driver	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency
	(30B1435)	3000K - 1435lm					(ND) Non Dimmable	
	(40B1479)	4000K - 1479lm					(A1) Analogue (1-10V)	
	(57B1550)	5700K - 1550lm					(DX) DMX	
VERONA SPOT 10.3W (VERONA SP 10)	(27B1138)	2700K - 1138lm	Adjustable	(90) 90	(24) 24° (32) 32°	(WH) White	(DL) DALI	EXTRAS (X0) No Extras (X1) Emergency
	(30B1180)	3000K - 1180lm					(PB) Push Button	
	(40B1265)	4000K - 1265lm					(PC) Phase Cut	
							(WL) Wireless **	
VERONA SPOT 10.6W (VERONA SP 11)	(27B0973)	2700K - 973lm	Adjustable	(97) 97	(24) 24° (32) 32°	(WH) White		EXTRAS (X0) No Extras (X1) Emergency
	(30B1038)	3000K - 1038lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 VERONA SP10 - 40B1265 - AD - 90 - 24 - WH - DX - 00

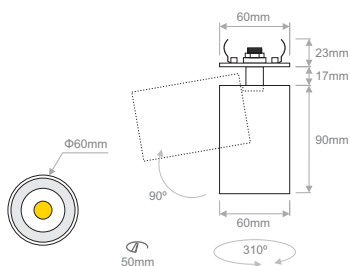

- L90/B10 50.000h



Warm Dimming **3000K to 1800K**


LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VERONA SP WD 6.0W <i>(VERONA SP WD06)</i>	<i>(1830B0518)</i> 1800K-3000K 518lm	<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(24)</i> 24° <i>(32)</i> 32°	<i>(WH)</i> White	<i>(A1)</i> Analogue (1-10V) <i>(DL)</i> DALI <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless *	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(0)</i> No Extras <i>(1)</i> Emergency Kit	


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

VERONA SP WD06 - 1830B0518 - AD - 95 - 32 - WH - DL - 00

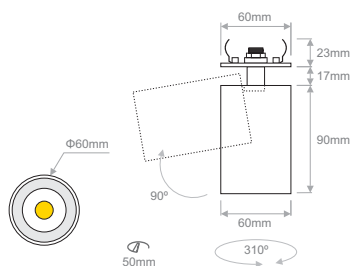

Warm dimming 3000K to 1800K (6W)

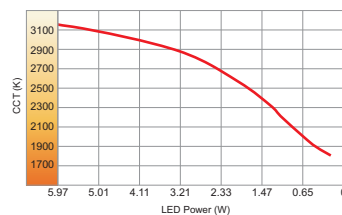

ZIBRA

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ZIBRA 10.5W (ZIBRA 11)	(27B1443)	2700K - 1443lm	[AD] Adjustable	[80] 80			[00] Without Driver [ND] Non Dimmable [A1] Analogue (1-10V) [DX] DMX [DL] DALI [PB] Push Button [PC] Phase Cut [WL] Wireless **	COVER [0X] Standard ↓ [XX] ↑ EXTRAS [X0] No Extras [X1] Emergency
	(30B1534)	3000K - 1534lm						
	(40B1579)	4000K - 1579lm						
	(57B1534)	5700K - 1534lm						
ZIBRA 10.5W (ZIBRA 11)	(27B1191)	2700K - 1191lm	[AD] Adjustable	[90] 90	(18) 18°	[WH] White		
	(30B1245)	3000K - 1245lm			(38) 38°	[BL] Black		
	(40B1318)	4000K - 1318lm			(44) 44°	[GR] Grey		
ZIBRA 10.5W (ZIBRA 11)	(27B1056)	2700K - 1056lm	[AD] Adjustable	[97] 97				
	(30B1128)	3000K - 1128lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 ZIBRA 11 - 40B1318 - AD - 90 - 18 - WH - DX - 00





ZIBRA WD

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L90/B10 50.000h

Warm Dimming
1800K to 3000K




LIGHTSOURCE BY
bridgelux®

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ZIBRA WD 6.0W ZIBRA WD06	(1830B0518) 1800K-3000K 518lm	(AD) Adjustable	(95) 95	(18) 18° (38) 38° (44) 44°	(WH) White (BL) Black (GR) Grey	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0X) Standard ↓ (XX) EXTRAS (0) No Extras (X1) Emergency Kit	


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

ZIBRA WD06 - 1830B0518 - AD - 95 - 44 - WH - DL - 00



Warm dimming 3000K to 1800K (6W)



- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ELISE 12.3W <i>(ELISE 12)</i>	<i>(27B1662)</i>	2700K - 1662lm	FX Fixed	(80) 80				COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency
	<i>(30B1766)</i>	3000K - 1766lm						
	<i>(40B1818)</i>	4000K - 1818lm						
	<i>(57B1766)</i>	5700K - 1766lm						
ELISE 17.7W <i>(ELISE 18)</i>	<i>(27B2302)</i>	2700K - 2302lm						
	<i>(30B2445)</i>	3000K - 2445lm						
	<i>(40B2518)</i>	4000K - 2518lm						
	<i>(57B2445)</i>	5700K - 2445lm						
ELISE 12.3W <i>(ELISE 12)</i>	<i>(27B1372)</i>	2700K - 1372lm		(90) 90	(18) 18° (40) 40° (45) 45°	WH White BL Black GR Grey	00 Without Driver ND Non Dimmable A1 Analogue (1-10V) DX DMX DL DALI PB Push Button PC Phase Cut WL Wireless ***	
	<i>(30B1434)</i>	3000K - 1434lm						
	<i>(40B1517)</i>	4000K - 1517lm						
	ELISE 17.7W <i>(ELISE 18)</i>	<i>(27B1899)</i>						
<i>(30B1985)</i>		3000K - 1985lm						
<i>(40B2100)</i>		4000K - 2100lm						
ELISE 12.3W <i>(ELISE 12)</i>		<i>(27B1216)</i>		2700K - 1216lm	(97) 97			
	<i>(30B1299)</i>	3000K - 1299lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

ELISE 18 - 40B2100 - FX - 90 - 40 - WH - DL - 00

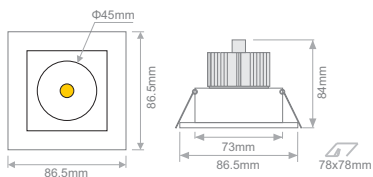

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L90/B10 50.000h

Warm Dimming
1800K to 3000K




LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ELISE WD 6.0W (ELISE WD06)	(1830B0518) 1800K-3000K 518lm	(FX) Fixed	(95) 95	(18) 18° (40) 40° (45) 45°	(WH) White (BL) Black (GR) Grey	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit	
ELISE WD 11.8W (ELISE WD12)	(1830B1045) 1800K-3000K 1045lm							


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


ELISE WD12 - 1830B1045 - FX - 95 - 18 - WH - DL - 00

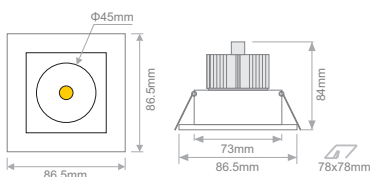

Warm dimming 3000K to 1800K (6W)



Warm dimming 3000K to 1800K (12W)

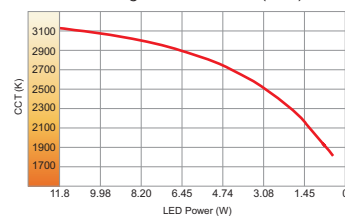

BORRELY ROUND

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux.


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY ROUND 8.9W (BORRELY R09)	(27B1089) 2700K - 1089lm (30B1135) 3000K - 1135lm (40B1180) 4000K - 1180lm		Adjustable (AD)	[80] 80	[38] 38°	[WH] White	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser ↓ (XX) EXTRAS [X0] No Extras [X1] Emergency Kit
BORRELY ROUND 12.2W (BORRELY R12)	(27B1575) 2700K - 1575lm (30B1657) 3000K - 1657lm (40B1706) 4000K - 1706lm (57B1788) 5700K - 1788lm							
BORRELY ROUND 8.9W (BORRELY R09)	(27B0908) 2700K - 908lm (30B0946) 3000K - 946lm (40B1014) 4000K - 1014lm							
BORRELY ROUND 12.2W (BORRELY R12)	(27B1313) 2700K - 1313lm (30B1362) 3000K - 1362lm (40B1460) 4000K - 1460lm							
BORRELY ROUND 12.5W (BORRELY R13)	(27B1121) 2700K - 1121lm (30B1196) 3000K - 1196lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

BORRELY R12 - 40B1460 - AD - 90 - 38 - WH - DX - 00

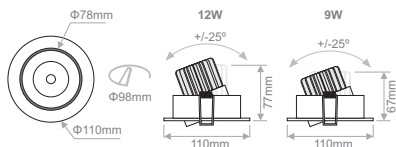

- High efficiency deep reflector with clear cover glass.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L90/B10 50.000h

Warm Dimming
1800K to 3000K




LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY ROUND WD 6.0W (BORRELY R WD06)	(1830B0518) 1800K-3000K 518lm		(AD) Adjustable	(95) 95	(38) 38	(WH) White	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER ☐ Standard ☒ Diffuser EXTRAS ☒ No Extras ☐ Emergency Kit
BORRELY ROUND WD 11.8W (BORRELY R WD12)	(1830B1045) 1800K-3000K 1045lm							


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


BORRELY R WD12 - 1830B1045 - AD - 95 - 38 - WH - DL - 00

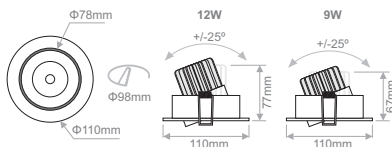

Warm dimming 3000K to 1800K (6W)

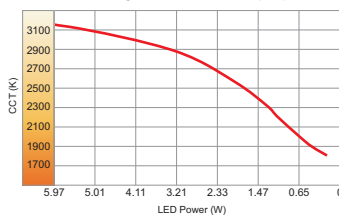

Warm dimming 3000K to 1800K (12W)



BORRELY SQUARE

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux.


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY SQUARE 8.9W <i>(BORRELY S09)</i>	<u>(27B1089)</u> 2700K - 1089lm <u>(30B1135)</u> 3000K - 1135lm <u>(40B1180)</u> 4000K - 1180lm		<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(38)</i> 38°	<i>(WH)</i> White	<u>(00)</u> Without Driver <u>(ND)</u> Non-Dimmable <u>(A1)</u> Analogue (1-10V) <u>(DX)</u> DMX <u>(DL)</u> DALI <u>(PB)</u> Push Button <u>(PC)</u> Phase Cut <u>(WL)</u> Wireless **	COVER <i>(0X)</i> Standard <i>(1X)</i> Diffuser ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
BORRELY SQUARE 12.2W <i>(BORRELY S12)</i>	<u>(27B1575)</u> 2700K - 1575lm <u>(30B1657)</u> 3000K - 1657lm <u>(40B1706)</u> 4000K - 1706lm <u>(57B1788)</u> 5700K - 1788lm							
BORRELY SQUARE 8.9W <i>(BORRELY S09)</i>	<u>(27B0908)</u> 2700K - 908lm <u>(30B0946)</u> 3000K - 946lm <u>(40B1014)</u> 4000K - 1014lm			<i>(90)</i> 90				
BORRELY SQUARE 12.2W <i>(BORRELY S12)</i>	<u>(27B1313)</u> 2700K - 1313lm <u>(30B1362)</u> 3000K - 1362lm <u>(40B1460)</u> 4000K - 1460lm							
BORRELY SQUARE 12.5W <i>(BORRELY S13)</i>	<u>(27B1121)</u> 2700K - 1121lm <u>(30B1196)</u> 3000K - 1196lm			<i>(97)</i> 97				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

BORRELY S12 - 40B1460 - AD - 90 - 38 - WH - DX - 00

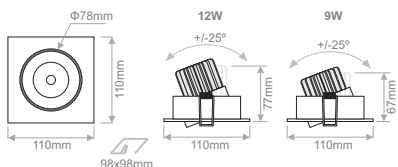

- High efficiency deep reflector with clear cover glass.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L90/B10 50.000h

Warm Dimming
1800K to 3000K




bridgelux.

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY SQUARE WD 6.0W <i>[BORRELY S WDO6]</i>	<i>(1830B0518)</i> 1800K-3000K 518lm		<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(38)</i> 38°	<i>(WH)</i> White	<i>(A1)</i> Analogue (1-10V) <i>(DL)</i> DALI <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless *	COVER <i>(0)</i> Standard <i>(1)</i> Diffuser EXTRAS <i>(0)</i> No Extras <i>(1)</i> Emergency Kit
BORRELY SQUARE WD 11.8W <i>[BORRELY S WD12]</i>	<i>(1830B1045)</i> 1800K-3000K 1045lm							


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


BORRELY S WD12 - 1830B1045 - AD - 95 - 38 - WH - DL - 00

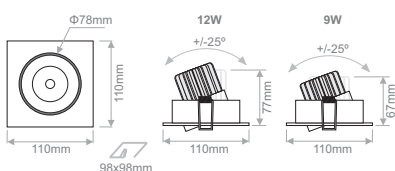

Warm dimming 3000K to 1800K (6W)



Warm dimming 3000K to 1800K (12W)



BORRELY DOUBLE SQUARE

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux.


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY DOUBLE SQUARE 17.8W <i>(BORRELY DS18)</i>	<i>(27B2178)</i> 2700K - 2178lm <i>(30B2270)</i> 3000K - 2270lm <i>(40B2360)</i> 4000K - 2360lm		Adjustable (AD)	(80) 80	(38) 38°	(WH) White	<i>(00)</i> Without Driver <i>(ND)</i> Non-Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **	COVER <i>(0X)</i> Standard <i>(1X)</i> Diffuser ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
BORRELY DOUBLE SQUARE 24.4W <i>(BORRELY DS24)</i>	<i>(27B3150)</i> 2700K - 3150lm <i>(30B3314)</i> 3000K - 3314lm <i>(40B3412)</i> 4000K - 3412lm <i>(57B3576)</i> 5700K - 3576lm							
BORRELY DOUBLE SQUARE 17.8W <i>(BORRELY DS18)</i>	<i>(27B1816)</i> 2700K - 1816lm <i>(30B1892)</i> 3000K - 1892lm <i>(40B2028)</i> 4000K - 2028lm			(90) 90				
BORRELY DOUBLE SQUARE 24.4W <i>(BORRELY DS24)</i>	<i>(27B2626)</i> 2700K - 2626lm <i>(30B2724)</i> 3000K - 2724lm <i>(40B2920)</i> 4000K - 2920lm							
BORRELY DOUBLE SQUARE 25.0W <i>(BORRELY DS25)</i>	<i>(27B2242)</i> 2700K - 2242lm <i>(30B2392)</i> 3000K - 2392lm			(97) 97				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

BORRELY DS24 - 40B2920 - AD - 90 - 38 - WH - DX - 00

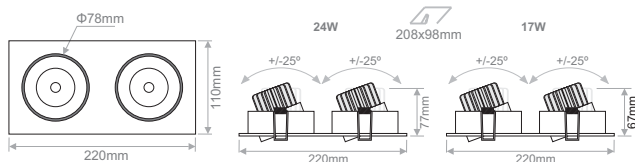

- High efficiency deep reflector with clear cover glass.
- Heat sink is of die-cast aluminium.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- L90/B10 50.000h



Warm Dimming
1800K to 3000K



LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
BORRELY DOUBLE SQUARE WD 12.0W (BORRELY DS WD12)	(1830B1036) 1800K-3000K 1036lm		(AD) Adjustable	(95) 95	(38) 38°	(WH) White	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER ☐ Standard ☒ Diffuser EXTRAS ☒ No Extras ☐ Emergency Kit
BORRELY DOUBLE SQUARE WD 23.6W (BORRELY DS WD24)	(1830B2090) 1800K-3000K 2090lm							


* The wireless dimming option includes driver and Bluetooth dimming accessory.




Ordering Code Example:

BORRELY DS WD24 - 1830B2090 - AD - 95 - 38 - WH - DL - 00


Warm dimming 3000K to 1800K (6W)



Warm dimming 3000K to 1800K (12W)



- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 2-3 SDCM
- L90/B10 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories				
MANI ROUND 6.1W <i>(MANI R06)</i>	<i>(27B0785)</i> 2700K - 785lm		<i>(FX)</i> Fixed	<i>(80)</i> 80	<i>(15)</i> 15° <i>(24)</i> 24° <i>(36)</i> 36°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **	COVER <i>(00)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(0)</i> No Extras <i>(X1)</i> Emergency Kit				
MANI SQUARE 6.1W <i>(MANI S06)</i>	<i>(30B0817)</i> 3000K - 817lm <i>(40B0850)</i> 4000K - 850lm											
MANI ROUND 6.1W <i>(MANI R06)</i>	<i>(27B0654)</i> 2700K - 654lm											
MANI SQUARE 6.1W <i>(MANI S06)</i>	<i>(30B0681)</i> 3000K - 681lm <i>(40B0730)</i> 4000K - 730lm											
MANI ROUND 8.9W <i>(MANI R09)</i>	<i>(27B1089)</i> 2700K - 1089lm											
MANI SQUARE 8.9W <i>(MANI S09)</i>	<i>(30B1135)</i> 3000K - 1135lm <i>(40B1180)</i> 4000K - 1180lm											
MANI ROUND 8.9W <i>(MANI R09)</i>	<i>(27B0908)</i> 2700K - 908lm											
MANI SQUARE 8.9W <i>(MANI S09)</i>	<i>(30B0946)</i> 3000K - 946lm <i>(40B1014)</i> 4000K - 1014lm											

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
MANI R06 - 30B0681 - FX - 90 - 15 - WH - DX - 00

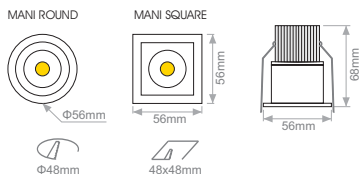



- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency.
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux.



Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VESTA ROUND 6.1W (VESTA R06)	[27B0785] 2700K - 785lm	Adjustable	[AD] Adjustable	[80] 80	[43] 43°	[WH] White	[00] Without Driver	COVER [0X] Standard ↓ [XX] EXTRAS [X0] No Extras [X1] Emergency Kit
VESTA SQUARE 6.1W (VESTA S06)	[30B0817] 3000K - 817lm						[ND] Non Dimmable	
	[40B0850] 4000K - 850lm						[A1] Analogue (1-10V)	
VESTA ROUND 6.1W (VESTA R06)	[27B0654] 2700K - 654lm	Adjustable	[AD] Adjustable	[90] 90	[43] 43°	[WH] White	[DX] DMX	EXTRAS [X0] No Extras [X1] Emergency Kit
VESTA SQUARE 6.1W (VESTA S06)	[30B0681] 3000K - 681lm						[DL] DALI	
	[40B0730] 4000K - 730lm						[PB] Push Button	
							[PC] Phase Cut	
							[WL] Wireless **	

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

VESTA R06 - 30B0681 - AD - 90 - 43 - WH - DL - 00



- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- L90/B10 50.000h

Warm Dimming
1800K to 3000K




LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VESTA ROUND WD 6.0W (VESTA R WD06) VESTA SQUARE WD 6.0W (VESTA S WD06)	(1830B0518) 1800K-3000K 518lm	(AD) Adjustable	(95) 95	(40) 40°	(WH) White	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless *	COVER (0X) Standard (XX) EXTRAS (X0) No Extras (X1) Emergency Kit	


* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

VESTA R WD06 - 1830B0518 - AD - 95 - 40 - WH - DL - 00

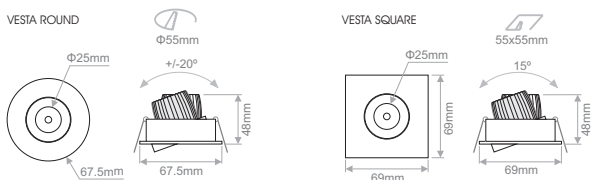

Warm dimming 3000K to 1800K (6W)



ZETA X

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W
4000lm:39.1W
5000lm:46.8W

LIGHTSOURCE BY
XICATO


Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories	
ZETA <i>(ZETA)</i>	<i>(27)</i> 2700K <i>(30)</i> 3000K <i>(35)</i> 3500K <i>(40)</i> 4000K	<i>(X1300)</i> 1300lm	<i>(FX)</i> Fixed	<i>(83)</i> 83	<i>(14)</i> 14° <i>(25)</i> 25° <i>(39)</i> 39°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver	COVER <i>(0X)</i> Standard <i>(2X)</i> Honeycomb ↓ <i>{XX}</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit	
		<i>(X2000)</i> 2000lm					<i>(ND)</i> Non-Dimmable		
		<i>(X3000)</i> 3000lm					<i>(A1)</i> Analogue (1-10V)		
		<i>(X4000)</i> 4000lm					<i>(DX)</i> DMX		
		<i>(X5000)</i> 5000lm					<i>(DL)</i> DALI		
						<i>(WL)</i> Wireless**			
		<i>(X1300)</i> 1300lm		<i>(97)</i> 97					
		<i>(X2000)</i> 2000lm							
		<i>(X3000)</i> 3000lm							

* Vibrant V80 for CRI83 available in 3000K,

Vibrant V95 for CRI97 available in 3000K,

Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.



Honeycomb louver
accessory



Ordering Code Example:

ZETA - 30 - X2000 - FX - 83 - 14 - BL - A1 - 00



Ceiling Recessed


ZETA B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridge**lux**.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories			
ZETA 12.3W (ZETA 12)	(27B1662)	2700K - 1662lm	(FX) Fixed	(80) 80	(14) 14° (25) 25° (39) 39°	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit			
	(30B1766)	3000K - 1766lm									
	(40B1818)	4000K - 1818lm									
	(57B1766)	5700K - 1766lm									
ZETA 17.5W (ZETA 18)	(27B2482)	2700K - 2482lm									
	(30B2637)	3000K - 2637lm									
	(40B2714)	4000K - 2714lm									
	(57B2637)	5700K - 2637lm									
ZETA 31.3W (ZETA 31)	(27B4510)	2700K - 4510lm									
	(30B4792)	3000K - 4792lm									
	(40B4933)	4000K - 4933lm									
	(57B4792)	5700K - 4792lm									
ZETA 12.3W (ZETA 12)	(27B1372)	2700K - 1372lm	(90) 90	(14) 14° (25) 25° (39) 39°	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit				
	(30B1434)	3000K - 1434lm									
	(40B1517)	4000K - 1517lm									
ZETA 17.5W (ZETA 18)	(27B2048)	2700K - 2048lm									
	(30B2140)	3000K - 2140lm									
	(40B2265)	4000K - 2265lm									
ZETA 31.3W (ZETA 31)	(27B3721)	2700K - 3721lm									
	(30B3890)	3000K - 3890lm									
	(40B4115)	4000K - 4115lm									
ZETA 12.3W (ZETA 12)	(27B1216)	2700K - 1216lm		(97) 97				(14) 14° (25) 25° (39) 39°	(WH) White (BL) Black	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1299)	3000K - 1299lm									
ZETA 17.5W (ZETA 18)	(27B1815)	2700K - 1815lm									
	(30B1939)	3000K - 1939lm									
ZETA 31.3W (ZETA 31)	(27B3298)	2700K - 3298lm									
	(30B3524)	3000K - 3524lm									



* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ZETA 31 - 40B4115 - FX - 90 - 39 - WH - DL - 00

ZETA MINI X

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W
4000lm:39.1W
5000lm:46.8W

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories	
ZETA MINI <i>(ZETA MINI)</i>	<i>(27)</i> 2700K <i>(30)</i> 3000K <i>(35)</i> 3500K <i>(40)</i> 4000K	<i>(X1300)</i> 1300lm	<i>(FX)</i> Fixed	<i>(83)</i> 83	<i>(14)</i> 14° <i>(25)</i> 25° <i>(39)</i> 39°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non-Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(WL)</i> Wireless**	COVER <i>(0X)</i> Standard <i>(2X)</i> Honeycomb ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit	
		<i>(X2000)</i> 2000lm							
		<i>(X3000)</i> 3000lm							
		<i>(X4000)</i> 4000lm							
		<i>(X5000)</i> 5000lm							
	<i>(27)</i> 2700K <i>(30)</i> 3000K <i>(35)</i> 3500K <i>(40)</i> 4000K	<i>(X1300)</i> 1300lm	<i>(97)</i> 97						
		<i>(X2000)</i> 2000lm							
		<i>(X3000)</i> 3000lm							

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
ZETA MINI - 30 - X2000 - FX - 83 - 14 - BL - A1 - 00



Ceiling Recessed

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h




ZETA MINI B



LIGHTSOURCE BY
bridge**lux**.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories				
ZETA MINI 12.3W <i>(ZETA M12)</i>	<i>(27B1662)</i>	2700K - 1662lm	<i>(FX)</i> Fixed	<i>(80)</i> 80		<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **	COVER <i>(0X)</i> Standard <i>(2X)</i> Honeycomb <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit				
	<i>(30B1766)</i>	3000K - 1766lm										
	<i>(40B1818)</i>	4000K - 1818lm										
	<i>(57B1766)</i>	5700K - 1766lm										
ZETA MINI 17.5W <i>(ZETA M18)</i>	<i>(27B2482)</i>	2700K - 2482lm										
	<i>(30B2637)</i>	3000K - 2637lm										
	<i>(40B2714)</i>	4000K - 2714lm										
	<i>(57B2637)</i>	5700K - 2637lm										
ZETA MINI 31.3W <i>(ZETA M31)</i>	<i>(27B4510)</i>	2700K - 4510lm										
	<i>(30B4792)</i>	3000K - 4792lm										
	<i>(40B4933)</i>	4000K - 4933lm										
	<i>(57B4792)</i>	5700K - 4792lm										
ZETA MINI 12.3W <i>(ZETA M12)</i>	<i>(27B1372)</i>	2700K - 1372lm	<i>(FX)</i> Fixed		<i>(14)</i> 14° <i>(25)</i> 25° <i>(39)</i> 39°							
	<i>(30B1434)</i>	3000K - 1434lm										
	<i>(40B1517)</i>	4000K - 1517lm										
ZETA MINI 17.5W <i>(ZETA M18)</i>	<i>(27B2048)</i>	2700K - 2048lm										
	<i>(30B2140)</i>	3000K - 2140lm										
	<i>(40B2265)</i>	4000K - 2265lm										
ZETA MINI 31.3W <i>(ZETA M31)</i>	<i>(27B3721)</i>	2700K - 3721lm										
	<i>(30B3890)</i>	3000K - 3890lm										
	<i>(40B4115)</i>	4000K - 4115lm										
ZETA MINI 12.3W <i>(ZETA M12)</i>	<i>(27B1216)</i>	2700K - 1216lm		<i>(FX)</i> Fixed								
	<i>(30B1299)</i>	3000K - 1299lm										
ZETA MINI 17.5W <i>(ZETA M18)</i>	<i>(27B1815)</i>	2700K - 1815lm										
	<i>(30B1939)</i>	3000K - 1939lm										
ZETA MINI 31.3W <i>(ZETA M31)</i>	<i>(27B3298)</i>	2700K - 3298lm										
	<i>(30B3524)</i>	3000K - 3524lm										



* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ZETA M31 - 40B4115 - FX - 90 - 39 - WH - DL - 00

KRONOS X

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Passive cooling through natural air flow.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W
4000lm:39.1W
5000lm:46.8W

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories	
KRONOS <i>(KRONOS)</i>	(27) 2700K (30) 3000K (35) 3500K (40) 4000K	(X1300) 1300lm	(FX) Fixed	(83) 83	(21) 21° (43) 43° (59) 59°	(WH) White	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit	
		(X2000) 2000lm				(BL) Black	(ND) Non-Dimmable		
		(X3000) 3000lm				(GR) Grey	(A1) Analogue (1-10V)		
		(X4000) 4000lm				(NS) Nickel Satin	(DX) DMX		
		(X5000) 5000lm				(GL) Gold	(DL) DALI		
							(WL) Wireless**		(DL) Wireless**
		(X1300) 1300lm		(97) 97					
		(X2000) 2000lm							
		(X3000) 3000lm							

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
KRONOS - 30 - X2000 - FX - 83 - 43 - BL - A1 - 00



Ceiling Recessed

KRONOS B


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridge**lux**.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
KRONOS 12.3W (KRONOS 12)	(27B1662)	2700K - 1662lm	(FX) Fixed	(80) 80				
	(30B1766)	3000K - 1766lm						
	(40B1818)	4000K - 1818lm						
	(57B1766)	5700K - 1766lm						
KRONOS 17.5W (KRONOS 18)	(27B2482)	2700K - 2482lm						
	(30B2637)	3000K - 2637lm						
	(40B2714)	4000K - 2714lm						
	(57B2637)	5700K - 2637lm						
KRONOS 31.3W (KRONOS 31)	(27B4510)	2700K - 4510lm						
	(30B4792)	3000K - 4792lm						
	(40B4933)	4000K - 4933lm						
	(57B4792)	5700K - 4792lm						
KRONOS 12.3W (KRONOS 12)	(27B1372)	2700K - 1372lm		(90) 90	(16) 16°	(WH) White	(00) Without Driver	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1434)	3000K - 1434lm			(26) 26°	(BL) Black	(ND) Non Dimmable	
	(40B1517)	4000K - 1517lm			(38) 38°	(GR) Grey	(A1) Analogue (1-10V)	
KRONOS 17.5W (KRONOS 18)	(27B2048)	2700K - 2048lm				(NS) Nickel Satin	(DX) DMX	
	(30B2140)	3000K - 2140lm				(GL) Gold	(DL) DALI	
	(40B2265)	4000K - 2265lm					(PB) Push Button	
KRONOS 31.3W (KRONOS 31)	(27B3721)	2700K - 3721lm					(PC) Phase Cut	
	(30B3890)	3000K - 3890lm					(WL) Wireless **	
	(40B4115)	4000K - 4115lm						
KRONOS 12.3W (KRONOS 12)	(27B1216)	2700K - 1216lm		(97) 97				
	(30B1299)	3000K - 1299lm						
KRONOS 17.5W (KRONOS 18)	(27B1815)	2700K - 1815lm						
	(30B1939)	3000K - 1939lm						
KRONOS 31.3W (KRONOS 31)	(27B3298)	2700K - 3298lm						
	(30B3524)	3000K - 3524lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
 KRONOS 31 - 40B4115 - FX - 90 - 38 - WH - DL - 00

ALTRA X

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
ALTRA (ALTRA)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83 (97) 97	(21) 21°	(WH) White	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm			(43) 43°	(BL) Black	(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm			(59) 59°	(GR) Grey	(A1) Analogue (1-10V)	
	(40) 4000K					(NS) Nickel Satin (GL) Gold	(DX) DMX (DL) DALI (WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95
** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
ALTRA - 30 - X2000 - AD - 83 - 43 - BL - A1 - 00



ALTRA B


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHT SOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories										
ALTRA 12.3W <i>(ALTRA 12)</i>	<i>(27B1662)</i>	2700K - 1662lm	Adjustable	80				COVER 0X Standard 2X Honeycomb ↓ XX EXTRAS X0 No Extras X1 Emergency Kit										
	<i>(30B1766)</i>	3000K - 1766lm																
	<i>(40B1818)</i>	4000K - 1818lm																
	<i>(57B1766)</i>	5700K - 1766lm																
ALTRA 17.5W <i>(ALTRA 18)</i>	<i>(27B2482)</i>	2700K - 2482lm																
	<i>(30B2637)</i>	3000K - 2637lm																
	<i>(40B2714)</i>	4000K - 2714lm																
	<i>(57B2637)</i>	5700K - 2637lm																
ALTRA 31.3W <i>(ALTRA 31)</i>	<i>(27B4510)</i>	2700K - 4510lm																
	<i>(30B4792)</i>	3000K - 4792lm																
	<i>(40B4933)</i>	4000K - 4933lm																
	<i>(57B4792)</i>	5700K - 4792lm																
ALTRA 12.3W <i>(ALTRA 12)</i>	<i>(27B1372)</i>	2700K - 1372lm	Adjustable		21° 43° 59°	White Black Grey Nickel Satin Gold	Without Driver Non Dimmable Analogue (1-10V) DMX DALI Push Button Phase Cut Wireless **											
	<i>(30B1434)</i>	3000K - 1434lm																
	<i>(40B1517)</i>	4000K - 1517lm																
ALTRA 17.5W <i>(ALTRA 18)</i>	<i>(27B2048)</i>	2700K - 2048lm							90									
	<i>(30B2140)</i>	3000K - 2140lm																
	<i>(40B2265)</i>	4000K - 2265lm																
ALTRA 31.3W <i>(ALTRA 31)</i>	<i>(27B3721)</i>	2700K - 3721lm																
	<i>(30B3890)</i>	3000K - 3890lm																
	<i>(40B4115)</i>	4000K - 4115lm																
ALTRA 12.3W <i>(ALTRA 12)</i>	<i>(27B1216)</i>	2700K - 1216lm	Adjustable	97														
	<i>(30B1299)</i>	3000K - 1299lm																
ALTRA 17.5W <i>(ALTRA 18)</i>	<i>(27B1815)</i>	2700K - 1815lm																
	<i>(30B1939)</i>	3000K - 1939lm																
ALTRA 31.3W <i>(ALTRA 31)</i>	<i>(27B3298)</i>	2700K - 3298lm																
	<i>(30B3524)</i>	3000K - 3524lm																

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
 ALTRA 31 - 40B4115 - AD - 90 - 43 - WH - DX - 00

VITA X

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W

LIGHTSOURCE BY
XICATO


Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
VITA (VITA)	(27) 2700K	(X1300) 1300lm	Adjustable	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm				(BL) Black	(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm				(GR) Grey	(A1) Analogue (1-10V)	
							(DX) DMX	
	(40) 4000K						(DL) DALI	
							(WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

VITA - 30 - X2000 - AD - 83 - 34 - BL - A1 - 00





Ceiling Recessed


VITA B

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridge**lux**.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories																	
VITA 12.3W (VITA 12)	(27B1662)	2700K - 1662lm	Adjustable (AD)	(80)	(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit																	
	(30B1766)	3000K - 1766lm																							
	(40B1818)	4000K - 1818lm																							
	(57B1766)	5700K - 1766lm																							
VITA 17.5W (VITA 18)	(27B2482)	2700K - 2482lm																							
	(30B2637)	3000K - 2637lm																							
	(40B2714)	4000K - 2714lm																							
	(57B2637)	5700K - 2637lm																							
VITA 31.3W (VITA 31)	(27B4510)	2700K - 4510lm																							
	(30B4792)	3000K - 4792lm																							
	(40B4933)	4000K - 4933lm																							
	(57B4792)	5700K - 4792lm																							
VITA 12.3W (VITA 12)	(27B1372)	2700K - 1372lm	Adjustable (AD)	(90)	(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit																	
	(30B1434)	3000K - 1434lm																							
	(40B1517)	4000K - 1517lm																							
VITA 17.5W (VITA 18)	(27B2048)	2700K - 2048lm							(90)	(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit												
	(30B2140)	3000K - 2140lm																							
	(40B2265)	4000K - 2265lm																							
VITA 31.3W (VITA 31)	(27B3721)	2700K - 3721lm							(90)					(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit								
	(30B3890)	3000K - 3890lm																							
	(40B4115)	4000K - 4115lm																							
VITA 12.3W (VITA 12)	(27B1216)	2700K - 1216lm		Adjustable (AD)					(97)									(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit				
	(30B1299)	3000K - 1299lm																							
VITA 17.5W (VITA 18)	(27B1815)	2700K - 1815lm																				(97)	(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **
	(30B1939)	3000K - 1939lm																							
VITA 31.3W (VITA 31)	(27B3298)	2700K - 3298lm			(97)	(34) 34°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit																
	(30B3524)	3000K - 3524lm																							



* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
VITA 31 - 40B4115 - AD - 90 - 34 - WH - DX - 00

LIBRA X

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.




Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W

LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
LIBRA (LIBRA)	(27) 2700K	(X1300) 1300lm	(FX) Fixed	(83) 83 (97) 97	(14) 14°	(AL) Aluminium	(00) Without Driver	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm			(25) 25°	(WH) White	(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm			(39) 39°	(BL) Black	(A1) Analogue (1-10V)	
	(40) 4000K					(GR) Grey	(DX) DMX (DL) DALI (WL) Wireless**	

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
LIBRA - 30 - X2000 - FX - 83 - 39 - BL - A1 - 00



Ceiling Recessed


LIBRA B

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridge**lux**.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
LIBRA 12.3W <i>(LIBRA 12)</i>	<i>(27B1662)</i>	2700K - 1662lm	(FX) Fixed	(80) 80				COVER <i>(0X)</i> Standard <i>(2X)</i> Honeycomb <i>{XX}</i> EXTRAS <i>{X0}</i> No Extras <i>{X1}</i> Emergency Kit
	<i>(30B1766)</i>	3000K - 1766lm						
	<i>(40B1818)</i>	4000K - 1818lm						
	<i>(57B1766)</i>	5700K - 1766lm						
LIBRA 17.5W <i>(LIBRA 18)</i>	<i>(27B2482)</i>	2700K - 2482lm						
	<i>(30B2637)</i>	3000K - 2637lm						
	<i>(40B2714)</i>	4000K - 2714lm						
	<i>(57B2637)</i>	5700K - 2637lm						
LIBRA 31.3W <i>(LIBRA 31)</i>	<i>(27B4510)</i>	2700K - 4510lm						
	<i>(30B4792)</i>	3000K - 4792lm						
	<i>(40B4933)</i>	4000K - 4933lm						
	<i>(57B4792)</i>	5700K - 4792lm						
LIBRA 12.3W <i>(LIBRA 12)</i>	<i>(27B1372)</i>	2700K - 1372lm	(90) 90	(14) 14° (25) 25° (39) 39°	(AL) Aluminium (WH) White (BL) Black (GR) Grey	(A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **		
	<i>(30B1434)</i>	3000K - 1434lm						
	<i>(40B1517)</i>	4000K - 1517lm						
LIBRA 17.5W <i>(LIBRA 18)</i>	<i>(27B2048)</i>	2700K - 2048lm						
	<i>(30B2140)</i>	3000K - 2140lm						
	<i>(40B2265)</i>	4000K - 2265lm						
LIBRA 31.3W <i>(LIBRA 31)</i>	<i>(27B3721)</i>	2700K - 3721lm						
	<i>(30B3890)</i>	3000K - 3890lm						
	<i>(40B4115)</i>	4000K - 4115lm						
LIBRA 12.3W <i>(LIBRA 12)</i>	<i>(27B1216)</i>	2700K - 1216lm		(97) 97				
	<i>(30B1299)</i>	3000K - 1299lm						
LIBRA 17.5W <i>(LIBRA 18)</i>	<i>(27B1815)</i>	2700K - 1815lm						
	<i>(30B1939)</i>	3000K - 1939lm						
LIBRA 31.3W <i>(LIBRA 31)</i>	<i>(27B3298)</i>	2700K - 3298lm						
	<i>(30B3524)</i>	3000K - 3524lm						




* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
LIBRA 31 - 40B4115 - FX - 90 - 39 - WH - DL - 00

MARS / MARS ADJ

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h




LIGHTSOURCE BY
bridgelux.



Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MARS A 17.5W (MARS A18)	(27B2482) 2700K - 2482lm (30B2637) 3000K - 2637lm		(AD) Adjustable	(80) 80				COVER (0X) Standard (1X) Diffuser (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
MARS 17.5W (MARS 18)	(40B2714) 4000K - 2714lm (57B2637) 5700K - 2637lm							
MARS A 31.3W (MARS A31)	(27B4510) 2700K - 4510lm (30B4792) 3000K - 4792lm							
MARS 31.3W (MARS 31)	(40B4933) 4000K - 4933lm (57B4792) 5700K - 4792lm							
MARS A 17.5W (MARS A18)	(27B2048) 2700K - 2048lm (30B2140) 3000K - 2140lm							
MARS 17.5W (MARS 18)	(40B2265) 4000K - 2265lm							
MARS A 31.3W (MARS A31)	(27B3721) 2700K - 3721lm (30B3890) 3000K - 3890lm		(FX) Fixed	(90) 90	(10) 10° (30) 30° (45) 45°	(WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	
MARS 31.3W (MARS 31)	(40B4115) 4000K - 4115lm							
MARS A 17.5W (MARS A18)	(27B1815) 2700K - 1815lm							
MARS 17.5W (MARS 18)	(30B1939) 3000K - 1939lm							
MARS A 31.3W (MARS A31)	(27B3298) 2700K - 3298lm							
MARS 31.3W (MARS 31)	(30B3524) 3000K - 3524lm							
				(97) 97				

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
 MARS 31-40B4115-FX-90-45-WH-DL-00



Ceiling Recessed


- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories					
MARS SQ 17.5W <i>(MARS SQ18)</i>	<i>(27B2482)</i>	2700K - 2482lm	FX Fixed	(80) 80	(10) 10° (30) 30° (45) 45°	WH White BL Black GR Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit					
	<i>(30B2637)</i>	3000K - 2637lm											
	<i>(40B2714)</i>	4000K - 2714lm											
	<i>(57B2637)</i>	5700K - 2637lm											
MARS SQ 31.1W <i>(MARS SQ31)</i>	<i>(27B4510)</i>	2700K - 4510lm		(90) 90					(97) 97	(10) 10° (30) 30° (45) 45°	WH White BL Black GR Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	<i>(30B4792)</i>	3000K - 4792lm											
	<i>(40B4933)</i>	4000K - 4933lm											
	<i>(57B4792)</i>	5700K - 4792lm											
MARS SQ 17.5W <i>(MARS SQ18)</i>	<i>(27B2048)</i>	2700K - 2048lm		(97) 97					(90) 90	(10) 10° (30) 30° (45) 45°	WH White BL Black GR Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	<i>(30B2140)</i>	3000K - 2140lm											
	<i>(40B2265)</i>	4000K - 2265lm											
MARS SQ 31.3W <i>(MARS SQ31)</i>	<i>(27B3721)</i>	2700K - 3721lm		(97) 97					(90) 90	(10) 10° (30) 30° (45) 45°	WH White BL Black GR Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	<i>(30B3890)</i>	3000K - 3890lm											
	<i>(40B4115)</i>	4000K - 4115lm											
MARS SQ 17.5W <i>(MARS SQ18)</i>	<i>(27B1815)</i>	2700K - 1815lm		(97) 97					(90) 90	(10) 10° (30) 30° (45) 45°	WH White BL Black GR Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	<i>(30B1939)</i>	3000K - 1939lm											
MARS SQ 31.3W <i>(MARS SQ31)</i>	<i>(27B3298)</i>	2700K - 3298lm		(97) 97					(90) 90	(10) 10° (30) 30° (45) 45°	WH White BL Black GR Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	<i>(30B3524)</i>	3000K - 3524lm											

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
MARS SQ31 - 40B4115 - FX - 90 - 45 - WH - DL - 00

GALAXY R

Ceiling Recessed 

- High efficiency deep reflector.
- Passive cooling through natural air flow.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 2 SDCM (5700K: 5 SDCM)
- L80/B50 - 50.000h




LED Power: 48W

CREE LEDs

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
Galaxy Recessed (GALAXY R)	(27C5700) 2700K - 5700lm	(AD) Adjustable	[80] ≥ 80	(60100) 60°x100° (104106) 104°x106°	[WH] White [BL] Black	[ND] Non-Dimmable [DX] DMX [DL] DALI
	(30C6120) 3000K - 6120lm					
	(35C6120) 3500K - 6120lm					
	(40C6600) 4000K - 6600lm					
	(57C6600) 5700K - 6600lm					
Galaxy Recessed (GALAXY R)	(27C4920) 2700K - 4920lm	(AD) Adjustable	[90] ≥ 90	(60100) 60°x100° (104106) 104°x106°	[WH] White [BL] Black	[ND] Non-Dimmable [DX] DMX [DL] DALI
	(30C5280) 3000K - 5280lm					
	(35C5280) 3500K - 5280lm					
	(40C5700) 4000K - 5700lm					
	(57C5700) 5700K - 5700lm					

Ordering Code Example:

GALAXY R - 30C6120 - AD - 80 - 60100 - WH - DX

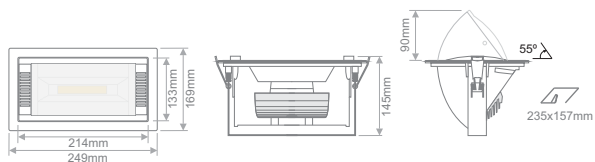

*ELECTRON SA offers 5 years LED module warranty.

- High efficiency deep reflector.
- Passive cooling through natural air flow.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- 2 SDCM (5700K: 5 SDCM)
- L80/B50 - 50.000h




LED Power: **48W**



Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
Galaxy Tunable Recessed (GALAXY TR)	(TWC6150) Tunable White 2700K-6500K 6150lm (Both CCTs driven)	(AD) Adjustable	(80) ≥ 80 (Both CCTs driven)	(60100) 60°x100° (104106) 104°x106°	(WH) White (BL) Black	(ND) Non-Dimmable (DX) DMX (DL) DALI
Galaxy Tunable Recessed (GALAXY TR)	(TWC5310) Tunable White 2700K-5700K 5310lm (Both CCTs driven)		(90) ≥ 90 (Both CCTs driven)			

Ordering Code Example:

GALAXY TR - TWC6150 - AD - 80 - 60100 - WH - DX

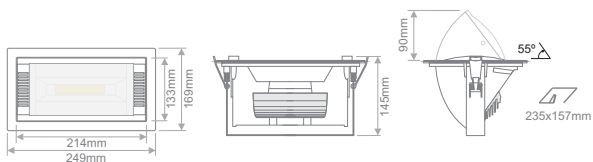

*ELECTRON SA offers 5 years LED module warranty.

RODITA

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- High purity aluminium.
- 2-3 SDCM
- L90/B10 50.000h





LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
RODITA 12.3W <i>(RODITA 12)</i>	<i>(27B1662)</i>	2700K - 1662lm	<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(40)</i> 40°	<i>(WH)</i> White	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **	COVER <i>(00)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
	<i>(30B1766)</i>	3000K - 1766lm						
	<i>(40B1818)</i>	4000K - 1818lm						
	<i>(57B1766)</i>	5700K - 1766lm						
RODITA 31.3W <i>(RODITA 31)</i>	<i>(27B4510)</i>	2700K - 4510lm						
	<i>(30B4792)</i>	3000K - 4792lm						
	<i>(40B4933)</i>	4000K - 4933lm						
	<i>(57B4792)</i>	5700K - 4792lm						
RODITA 12.3W <i>(RODITA 12)</i>	<i>(27B1372)</i>	2700K - 1372lm						
	<i>(30B1434)</i>	3000K - 1434lm						
	<i>(40B1517)</i>	4000K - 1517lm						
RODITA 31.3W <i>(RODITA 31)</i>	<i>(27B3721)</i>	2700K - 3721lm						
	<i>(30B3890)</i>	3000K - 3890lm						
	<i>(40B4115)</i>	4000K - 4115lm						
RODITA 12.3W <i>(RODITA 12)</i>	<i>(27B1216)</i>	2700K - 1216lm						
	<i>(30B1299)</i>	3000K - 1299lm						
RODITA 31.3W <i>(RODITA 31)</i>	<i>(27B3298)</i>	2700K - 3298lm						
	<i>(30B3524)</i>	3000K - 3524lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

RODITA 31 - 40B4115 - AD - 90 - 40 - WH - DL - 00





Ceiling Recessed

SORENA

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- High purity aluminium.
- 2-3 SDCM
- L90/B10 50.000h





LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
SORENA 17.5W (SORENA 18)	(27B2482)	2700K - 2482lm	Adjustable	(80) 80	(38) 38°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2637)	3000K - 2637lm						
	(40B2714)	4000K - 2714lm						
	(57B2637)	5700K - 2637lm						
SORENA 31.3W (SORENA 31)	(27B4510)	2700K - 4510lm		(20) 20°	(20) 20°			
	(30B4792)	3000K - 4792lm						
	(40B4933)	4000K - 4933lm						
	(57B4792)	5700K - 4792lm						
SORENA 17.5W (SORENA 18)	(27B2048)	2700K - 2048lm		(90) 90	(38) 38°			
	(30B2140)	3000K - 2140lm						
	(40B2265)	4000K - 2265lm						
SORENA 31.3W (SORENA 31)	(27B3721)	2700K - 3721lm		(20) 20°	(20) 20°			
	(30B3890)	3000K - 3890lm						
	(40B4115)	4000K - 4115lm						
SORENA 17.5W (SORENA 18)	(27B1815)	2700K - 1815lm		(97) 97	(38) 38°			
	(30B1939)	3000K - 1939lm						
SORENA 31.3W (SORENA 31)	(27B3298)	2700K - 3298lm		(20) 20°	(20) 20°			
	(30B3524)	3000K - 3524lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

SORENA 31 - 40B4115 - AD - 90 - 20 - WH - DL - 00



SORENA 18W



SORENA 30W

- Downlight module suitable for direct installation in ceilings (PL replacement).
- Module with integrated electronics and heatsink.
- Light engine operating with 230 VAC.



Luminous Efficacy


PELO 11.6W: **88lm/W** (3000K), **92lm/W** (4000K), **92lm/W** (6500K)

PELO 22.7W: **90lm/W** (3000K), **94lm/W** (4000K), **96lm/W** (6500K)

Model	Colour Temperature - LED Lumen	Type	Colour Rendering	Beam Angle	Colour	Dimming Option
PELO 11.6W (PELO 11.6)	(30T1020) 3000K - 1020lm	(FX) Fixed	(80) 80	(60) 60° (90) 90°	(WH) White	(ND) Non-Dimmable 230VAC
	(40T1070) 4000K - 1070lm					
	(65T1070) 6500K - 1070lm					
PELO 22.7W (PELO 22.7)	(30T2040) 3000K - 2040lm	(FX) Fixed	(80) 80	(60) 60° (90) 90°	(WH) White	(ND) Non-Dimmable 230VAC
	(40T2140) 4000K - 2140lm					
	(65T2160) 6500K - 2160lm					

Ordering Code Example:

PELO 22.7 - 30T2040 - FX - 80 - 90 - WH - ND

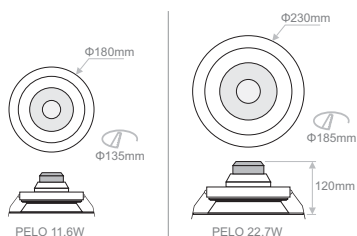



Ceiling Recessed


- Assymetric wall wash.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux®

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
DIAS 11.9W (DIAS 12)	(27B1791)	2700K - 1791lm	(FX) Fixed	(80)	(AS) Asymmetric Wash	(AL) Alluminium (WH) White (BL) Black (GR) Grey	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) ↑ EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1903)	3000K - 1903lm						
	(40B1959)	4000K - 1959lm						
	(57B1903)	5700K - 1903lm						
DIAS 17.5W (DIAS 18)	(27B2482)	2700K - 2482lm						
	(30B2637)	3000K - 2637lm						
	(40B2714)	4000K - 2714lm						
	(57B2637)	5700K - 2637lm						
DIAS 11.9W (DIAS 12)	(27B1478)	2700K - 1478lm						
	(30B1544)	3000K - 1544lm						
	(40B1634)	4000K - 1634lm						
DIAS 17.5W (DIAS 18)	(27B2048)	2700K - 2048lm						
	(30B2140)	3000K - 2140lm						
	(40B2265)	4000K - 2265lm						
DIAS 11.9W (DIAS 12)	(27B1310)	2700K - 1310lm						
	(30B1399)	3000K - 1399lm						
DIAS 17.5W (DIAS 18)	(27B1815)	2700K - 1815lm						
	(30B1939)	3000K - 1939lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
** The wireless dimming option includes driver and Bluetooth dimming accessory.




Ordering Code Example:
DIAS 18 - 40B2265 - FX - 90 - AS - WH - DL - 00

HELIO X

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W


LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
HELIO (HELIO)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm					(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm					(A1) Analogue (1-10V)	
	(40) 4000K						(DX) DMX	
							(DL) DALI	
							(WL) Wireless**	


* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
HELIO - 30 - X2000 - AD - 83 - 34 - WH - A1 - 00




- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
HELIO 17.5W (HELIO 18)	(27B2482)	2700K - 2482lm	(AD) Adjustable	(80) 80	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2637)	3000K - 2637lm						
	(40B2714)	4000K - 2714lm						
	(57B2637)	5700K - 2637lm						
HELIO 25.3W (HELIO 25)	(27B3384)	2700K - 3384lm	(AD) Adjustable	(90) 90	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B3595)	3000K - 3595lm						
	(40B3701)	4000K - 3701lm						
	(57B3595)	5700K - 3595lm						
HELIO 17.5W (HELIO 18)	(27B2048)	2700K - 2048lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2140)	3000K - 2140lm						
	(40B2265)	4000K - 2265lm						
HELIO 25.3W (HELIO 25)	(27B2792)	2700K - 2792lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2919)	3000K - 2919lm						
	(40B3088)	4000K - 3088lm						
HELIO 17.5W (HELIO 18)	(27B1815)	2700K - 1815lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1939)	3000K - 1939lm						
HELIO 25.3W (HELIO 25)	(27B2475)	2700K - 2475lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2644)	3000K - 2644lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

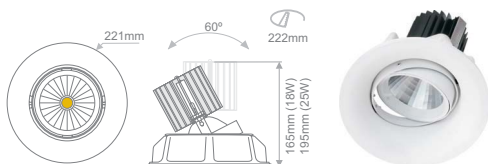

Ordering Code Example:
 HELIO 25 - 40B3701 - AD - 80 - 34 - WH - DL - 00

PANDORA X

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W


LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
PANDORA (PANDORA)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm					(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm					(A1) Analogue (1-10V)	
	(40) 4000K						(DX) DMX	
							(DL) DALI	
							(WL) Wireless**	


* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
PANDORA - 30 - X2000 - AD - 83 - 34 - WH - A1 - 00




- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
PANDORA 17.5W (PANDORA 18)	(27B2482)	2700K - 2482lm	(AD) Adjustable	(80) 80	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2637)	3000K - 2637lm						
	(40B2714)	4000K - 2714lm						
	(57B2637)	5700K - 2637lm						
PANDORA 25.3W (PANDORA 25)	(27B3384)	2700K - 3384lm	(AD) Adjustable	(90) 90	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B3595)	3000K - 3595lm						
	(40B3701)	4000K - 3701lm						
	(57B3595)	5700K - 3595lm						
PANDORA 17.5W (PANDORA 18)	(27B2048)	2700K - 2048lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2140)	3000K - 2140lm						
	(40B2265)	4000K - 2265lm						
PANDORA 25.3W (PANDORA 25)	(27B2792)	2700K - 2792lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2919)	3000K - 2919lm						
	(40B3088)	4000K - 3088lm						
PANDORA 17.5W (PANDORA 18)	(27B1815)	2700K - 1815lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1939)	3000K - 1939lm						
PANDORA 25.3 (PANDORA 25)	(27B2475)	2700K - 2475lm	(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2644)	3000K - 2644lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:
 PANDORA 25 - 40B3701 - AD - 80 - 34 - WH - DL - 00

HEKTOR X

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm:11.7W
2000lm:19.5W
3000lm:29.3W


LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
HEKTOR (HEKTOR)	(27) 2700K	(X1300) 1300lm	(AD) Adjustable	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER (0X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30) 3000K	(X2000) 2000lm					(ND) Non-Dimmable	
	(35) 3500K	(X3000) 3000lm					(A1) Analogue (1-10V)	
	(40) 4000K						(DX) DMX	
							(DL) DALI	
							(WL) Wireless**	


* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
HEKTOR - 30 - X2000 - AD - 83 - 34 - WH - A1 - 00




- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
HEKTOR 17.5W (HEKTOR 18)	(27B2482) 2700K - 2482lm		(AD) Adjustable	(80) 80	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0/X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2637) 3000K - 2637lm							
	(40B2714) 4000K - 2714lm							
	(57B2637) 5700K - 2637lm							
HEKTOR 25.3W (HEKTOR 25)	(27B3384) 2700K - 3384lm		(AD) Adjustable	(90) 90	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0/X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B3595) 3000K - 3595lm							
	(40B3701) 4000K - 3701lm							
	(57B3595) 5700K - 3595lm							
HEKTOR 17.5W (HEKTOR 18)	(27B2048) 2700K - 2048lm		(AD) Adjustable	(90) 90	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0/X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2140) 3000K - 2140lm							
	(40B2265) 4000K - 2265lm							
HEKTOR 25.3W (HEKTOR 25)	(27B2792) 2700K - 2792lm		(AD) Adjustable	(90) 90	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0/X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2919) 3000K - 2919lm							
	(40B3088) 4000K - 3088lm							
HEKTOR 17.5W (HEKTOR 18)	(27B1815) 2700K - 1815lm		(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0/X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1939) 3000K - 1939lm							
HEKTOR 25.3 (HEKTOR 25)	(27B2475) 2700K - 2475lm		(AD) Adjustable	(97) 97	(34) 34°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0/X) Standard ↓ (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2644) 3000K - 2644lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

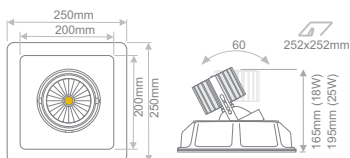


Ordering Code Example:
 HEKTOR 25 - 40B3701 - AD - 80 - 34 - WH - DL - 00

GALINO X

Ceiling Recessed 

- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Cutout for AR111.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
2600lm: **23.4W**
4000lm: **39W**
6000lm: **58.6W**


LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
GALINO (GALINO)	(27) 2700K	(X2600) 2600lm	(AD) Adjustable	(83) 83 (97) 97	(34) 34°	(WH) White	(00) Without Driver	COVER (0) Standard ↓ (XX) EXTRAS (0) No Extras (1) Emergency Kit
	(30) 3000K	(X4000) 4000lm					(ND) Non-Dimmable	
	(35) 3500K	(X6000) 6000lm					(A1) Analogue (1-10V)	
	(40) 4000K						(DX) DMX	
							(DL) DALI	
							(WL) Wireless**	


* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
GALINO - 30 - X4000 - AD - 83 - 34 - WH - A1 - 00



- High efficiency deep reflector.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
GALINO 35.0W <i>(GALINO 35)</i>	<i>(27B4964)</i> 2700K - 4964lm <i>(30B5274)</i> 3000K - 5274lm <i>(40B5428)</i> 4000K - 5428lm <i>(57B5274)</i> 5700K - 5274lm		Adjustable <i>(AD)</i>	<i>(80)</i> 80	<i>(34)</i> 34°	<i>(WH)</i> White	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
GALINO 50.6W <i>(GALINO 51)</i>	<i>(27B6768)</i> 2700K - 6768lm <i>(30B7190)</i> 3000K - 7190lm <i>(40B7402)</i> 4000K - 7402lm <i>(57B7190)</i> 5700K - 7190lm							
GALINO 35.0W <i>(GALINO 35)</i>	<i>(27B4096)</i> 2700K - 4096lm <i>(30B4280)</i> 3000K - 4280lm <i>(40B4530)</i> 4000K - 4530lm							
GALINO 50.6W <i>(GALINO 51)</i>	<i>(27B5584)</i> 2700K - 5584lm <i>(30B5838)</i> 3000K - 5838lm <i>(40B6176)</i> 4000K - 6176lm							
GALINO 35.0W <i>(GALINO 35)</i>	<i>(27B3630)</i> 2700K - 3630lm <i>(30B3878)</i> 3000K - 3878lm							
GALINO 50.6W <i>(GALINO 51)</i>	<i>(27B4950)</i> 2700K - 4950lm <i>(30B5288)</i> 3000K - 5288lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.



Ordering Code Example:

GALINO 51 - 40B7402 - AD - 80 - 34 - WH - DL - 00

AMOS / AMOS XL

Ceiling Recessed 


- The base of the luminaire is plaster.
- Ideal for high demanding architectural spaces.
- CREE LED.



AMOS


AMOS XL

CREE LEDs



Plaster
luminaires

Code	Model	Watt	Voltage					
PCR.025	AMOS	9W	230VAC	30°	Included	1,72Kg	158x158mm	IP20
PCR.026	AMOS XL	9W	230VAC	30°	Included	1,83Kg	158x158mm	IP20

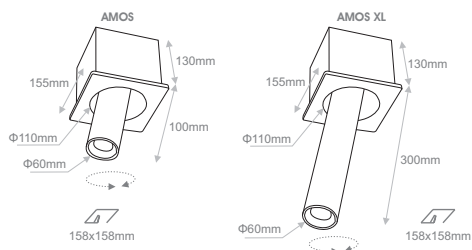



Ceiling Recessed

CRATER

- Dimmable options.
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridge**lux**.


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CRATER 12.5W <i>(CRATER 13)</i>	<i>(27B1612)</i>	2700K - 1612lm	<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(16)</i> 16° <i>(40)</i> 40°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
	<i>(30B1713)</i>	3000K - 1713lm					<i>(ND)</i> Non Dimmable	
	<i>(40B1763)</i>	4000K - 1763lm		<i>(A1)</i> Analogue (1-10V)				
	<i>(57B1713)</i>	5700K - 1713lm		<i>(DX)</i> DMX				
CRATER 12.5W <i>(CRATER 13)</i>	<i>(27B1331)</i>	2700K - 1331lm	<i>(AD)</i> Adjustable	<i>(90)</i> 90	<i>(16)</i> 16° <i>(40)</i> 40°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(DL)</i> DALI	EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
	<i>(30B1391)</i>	3000K - 1391lm					<i>(PB)</i> Push Button	
	<i>(40B1472)</i>	4000K - 1472lm					<i>(PC)</i> Phase Cut	
CRATER 12.5W <i>(CRATER 13)</i>	<i>(27B1180)</i>	2700K - 1180lm	<i>(AD)</i> Adjustable	<i>(97)</i> 97	<i>(16)</i> 16° <i>(40)</i> 40°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(WL)</i> Wireless **	
	<i>(30B1260)</i>	3000K - 1260lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

CRATER 13 - 40B1472 - AD - 90 - 16 - WH - DX - 00



- Dimmable options.
- 2-3 SDCM
- L90/B10 50.000h



VELA 13





VELA DOUBLE 25

LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
VELA 12.5W <i>(VELA 13)</i>	<i>(27B1612)</i> 2700K - 1612lm <i>(30B1713)</i> 3000K - 1713lm <i>(40B1763)</i> 4000K - 1763lm <i>(57B1713)</i> 5700K - 1713lm		<i>(AD)</i> Adjustable	<i>(80)</i> 80		<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **	COVER <i>(0X)</i> Standard ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit
VELA DOUBLE 25.0W <i>(VELA D25)</i>	<i>(27B3224)</i> 2700K - 3224lm <i>(30B3426)</i> 3000K - 3426lm <i>(40B3526)</i> 4000K - 3526lm <i>(57B3426)</i> 5700K - 3426lm							
VELA 12.5W <i>(VELA 13)</i>	<i>(27B1331)</i> 2700K - 1331lm <i>(30B1391)</i> 3000K - 1391lm <i>(40B1472)</i> 4000K - 1472lm			<i>(90)</i> 90				
VELA DOUBLE 25.0W <i>(VELA D25)</i>	<i>(27B2662)</i> 2700K - 2662lm <i>(30B2782)</i> 3000K - 2782lm <i>(40B2944)</i> 4000K - 2944lm							
VELA 12.5W <i>(VELA 13)</i>	<i>(27B1180)</i> 2700K - 1180lm <i>(30B1260)</i> 3000K - 1260lm			<i>(97)</i> 97				
VELA DOUBLE 25.0W <i>(VELA D25)</i>	<i>(27B2360)</i> 2700K - 2360lm <i>(30B2520)</i> 3000K - 2520lm							

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.
 ** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
 VELA D25 - 40B2944 - AD - 90 - 16 - WH - DL - 00






Ceiling Recessed

URANUS / URANUS ADJ

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50.000h



LIGHTSOURCE BY
bridgelux


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
URANUS A 12.3W (URANUS A12)	(27B1662) 2700K - 1662lm (30B1766) 3000K - 1766lm							
URANUS 12.3W (URANUS 12)	(40B1818) 4000K - 1818lm (57B1766) 5700K - 1766lm							
URANUS A 17.7W (URANUS A18)	(27B2302) 2700K - 2302lm (30B2445) 3000K - 2445lm							
URANUS 17.7W (URANUS 18)	(40B2305) 4000K - 2305lm (57B2415) 5700K - 2415lm							
URANUS A 12.3W (URANUS A12)	(27B1372) 2700K - 1372lm (30B1434) 3000K - 1434lm		(AD) Adjustable		(16) 16°	(WH) White	(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V)	COVER (0X) Standard (2X) Honeycomb
URANUS 12.3W (URANUS 12)	(40B1517) 4000K - 1517lm		(FX) Fixed		(38) 38°	(BL) Black (GR) Grey	(DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	(XX)
URANUS A 17.7W (URANUS A18)	(27B1971) 2700K - 1971lm (30B1985) 3000K - 1985lm							
URANUS 17.7W (URANUS 18)	(40B1973) 4000K - 1973lm							
URANUS A 12.3W (URANUS A12)	(27B1216) 2700K - 1216lm (30B1299) 3000K - 1299lm							
URANUS 12.3W (URANUS 12)								

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

URANUS A18 - 40B1973 - AD - 90 - 26 - WH - DL - 00



JUPITER

Ceiling Recessed 

- Samsung LED
- Ambient temperature max 35°C.
- Made of die-cast aluminium.
- Anodized aluminium heat sink.
- Indoor use
- Dimmable options.
- Cutoff for MR16.
- 3 SDCM
- L70 50.000h
- IP65 (face only)




LIGHTSOURCE BY
SAMSUNG

Model (LED Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
JUPITER 12.5W (JUPITER 12)	(30S1340) 3000K - 1340lm	(FX) Fixed	(80) ≥ 80	(DF) Diffused (20) 20° (35) 35° (55) 55°	(WH) White (NS) Nickel Satin	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DL) DALI (WL) Wireless *	(00) Standard (XX) (0) No Extras (1) Emergency	
	(40S1405) 4000K - 1405lm							

* The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
JUPITER 12 - 40S1405 - FX - 80 - DF - NS - A1 - 00



Round





Square (upon request)



- Recessed non-movable spots
- Die-cast aluminium
- Suitable for MR16 lamps/ 12VAC
- Outdoor use
- Ideal for lighting in bathrooms, spa, fitting rooms, etc.
- With Frosted Glass or Clear Glass



Code	Colour	Glass	Lamp	Lamp Holder	Maximum Consumption		Ø	Type	IP	 Not included
ALE.032	NICKEL BRUSH	Frosted	MR16	GU5.3	35W	70mm	84mm	Fixed	IP65	
ALE.033	WHITE	Frosted	MR16	GU5.3	35W	70mm	84mm	Fixed	IP65	
ALE.056	NICKEL BRUSH	Clear	MR16	GU5.3	35W	70mm	84mm	Fixed	IP65	
ALE.057	WHITE	Clear	MR16	GU5.3	35W	70mm	84mm	Fixed	IP65	


Round

Square


*Available in square upon request for MOQ.



ENIGMA X

Ceiling Recessed 

- High efficiency deep reflector with clear cover glass.
- Passive cooling through natural air flow.
- 1x2 SDCM
- L80/B50 50.000h
- C3 50.000h
- 5 years LED module Warranty.



Wattage:
1300lm:11.7W
2000lm:19.5W


LIGHTSOURCE BY
XICATO

Model	Colour Temperature	LED Lumen	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories					
ENIGMA <i>(ENIGMA)</i>	<i>(27)</i> 2700K	<i>(X1300)</i> 1300lm <i>(X2000)</i> 2000lm	<i>(AD)</i> Adjustable	<i>(83)</i> 83 <i>(97)</i> 97	<i>(40)</i> 40° <i>(56)</i> 56°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver	COVER <i>(0X)</i> Standard <i>(2X)</i> Honeycomb ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras <i>(X1)</i> Emergency Kit					
	<i>(30)</i> 3000K						<i>(ND)</i> Non-Dimmable						
	<i>(35)</i> 3500K						<i>(A1)</i> Analogue (1-10V)						
	<i>(40)</i> 4000K						<i>(DX)</i> DMX						
							<i>(DL)</i> DALI						
							<i>(WL)</i> Wireless**						

* Vibrant V80 for CRI83 available in 3000K,
Vibrant V95 for CRI97 available in 3000K,
Beauty series 2700K available in 1300lm or 2000lm CRI95

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:
ENIGMA - 30 - X2000 - AD - 83 - 56 - BL - A1 - 00

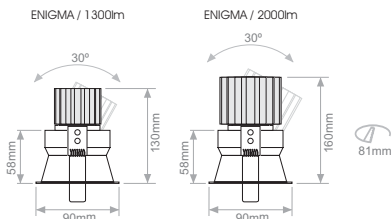

- High efficiency deep reflector with clear cover glass.
- Supplied with non-dimmable drivers as standard.
- Dimmable options.
- Increased efficiency
- 2-3 SDCM
- L90/B10 50,000h



LIGHTSOURCE BY
bridgeLux.


Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
ENIGMA 10.5W (ENIGMA 11)	(27B1443)	2700K - 1443lm	Adjustable	(80) 80			(00) Without Driver (ND) Non Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1534)	3000K - 1534lm						
	(40B1579)	4000K - 1579lm						
	(57B1534)	5700K - 1534lm						
ENIGMA 10.5W (ENIGMA 11)	(27B1191)	2700K - 1191lm	Adjustable	(90) 90	(16) 16° (42) 42° (56) 56°	(WH) White (BL) Black		
	(30B1245)	3000K - 1245lm						
	(40B1318)	4000K - 1318lm						
ENIGMA 10.5W (ENIGMA 11)	(27B1056)	2700K - 1056lm		(97) 97				
	(30B1128)	3000K - 1128lm						

* Models with CCTs of 3500K, 5000K & 6500K are available upon request.

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:

ENIGMA 11 - 40B1318 - AD - 90 - 16 - WH - DX - 00



CASTALIA R

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.



LIGHTSOURCE BY
bridgelux






Model (LED Power)	Colour Temperature* - LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Extra	
CASTALIA R ROUND 6.1W <i>(CASTALIA RR6)</i>	<i>(27B0812)</i> 2700K - 812lm	<i>(FX)</i> Fixed	<i>(80)</i> 80		<i>(WH)</i> White <i>(BL)</i> Black	<i>(00)</i> Without Driver <i>(ND)</i> Non Dimmable <i>(A1)</i> Analogue (1-10V) <i>(DX)</i> DMX <i>(DL)</i> DALI <i>(PB)</i> Push Button <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless ***	<i>(00)</i> No Extra <i>(01)</i> Emergency Kit	
	<i>(30B0845)</i> 3000K - 845lm							
	<i>(40B0879)</i> 4000K - 879lm							
CASTALIA R SQUARE 6.1W <i>(CASTALIA RS6)</i>	<i>(27B0677)</i> 2700K - 677lm		<i>(90)</i> 90	<i>(14)</i> 14° <i>(20)</i> 20° <i>(30)</i> 30° <i>(36)</i> 36°				
	<i>(30B0705)</i> 3000K - 705lm							
	<i>(40B0733)</i> 4000K - 733lm							
CASTALIA R ROUND 10.3W <i>(CASTALIA RR10)</i>	<i>(27B1379)</i> 2700K - 1379lm		<i>(80)</i> 80					
	<i>(30B1435)</i> 3000K - 1435lm							
	<i>(40B1479)</i> 4000K - 1479lm							
CASTALIA R SQUARE 10.3W <i>(CASTALIA RS10)</i>	<i>(27B1138)</i> 2700K - 1138lm	<i>(90)</i> 90						
	<i>(30B1180)</i> 3000K - 1180lm							
	<i>(40B1265)</i> 4000K - 1265lm							

* CCT: 3500K, 5000K, 6500K available upon request.

** Other RAL colours available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA RR10-30B1435-FX-80-20-WH-ND-00

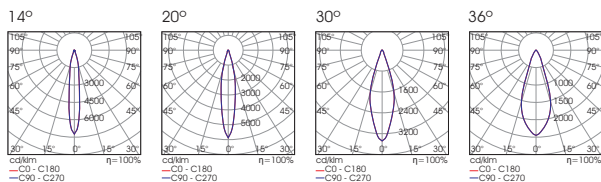



- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.

Warm Dimming
1800K to 3000K








LIGHTSOURCE BY
bridgelux®

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Extra
CASTALIA R ROUND WD 6.1W <i>(CASTALIA RRWD6)</i> CASTALIA R SQUARE WD 6.1W <i>(CASTALIA RSWD6)</i>	<i>(B0518)</i> 1800K-3000K 518lm	<i>(FX)</i> Fixed	<i>(95)</i> 95	<i>(14)</i> 14°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(A1)</i> Analogue (1-10V)	<i>(00)</i> No Extra <i>(01)</i> Emergency Kit	
				<i>(20)</i> 20° <i>(30)</i> 30° <i>(36)</i> 36°				
						<i>(DL)</i> DALI <i>(PC)</i> Phase Cut <i>(WL)</i> Wireless **		

* Other RAL colours available upon request

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: *CASTALIA RRWD6-B0518-FX-80-20-WH-ND-00*

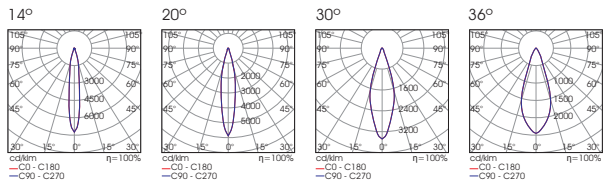

CASTALIA S

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.



LIGHTSOURCE BY
bridgelux®



Model (LED Power)	Colour Temperature* -	Initial LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Extra		
CASTALIA S ROUND 6.1W (CASTALIA SR6)	(27B0812)	2700K - 812lm	(FX) Fixed	(80) 80	(18) 18° (22) 22° (30) 30°	(WH) White (BL) Black	(00) Without Driver	(00) No Extra (01) Emergency Kit		
	(30B0845)	3000K - 845lm					(ND) Non Dimmable			
	(40B0879)	4000K - 879lm					(A1) Analogue (1-10V)			
	(27B0677)	2700K - 677lm		(90) 90			(DX) DMX			
	(30B0705)	3000K - 705lm					(DL) DALI			
	(40B0733)	4000K - 733lm					(PB) Push Button			
CASTALIA S ROUND 10.3W (CASTALIA SR10)	(27B1379)	2700K - 1379lm		(80) 80			(PC) Phase Cut			
	(30B1435)	3000K - 1435lm					(WL) Wireless ***			
	(40B1479)	4000K - 1479lm								
	(27B1138)	2700K - 1138lm		(90) 90						
	(30B1180)	3000K - 1180lm								
	(40B1265)	4000K - 1265lm								

* CCT: 3500K, 5000K, 6500K available upon request.

** Other RAL colours available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

CASTALIA SR10-30B1435-FX-80-22-WH-ND-00

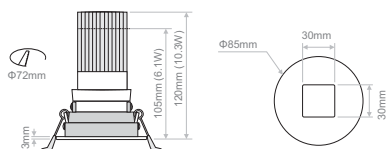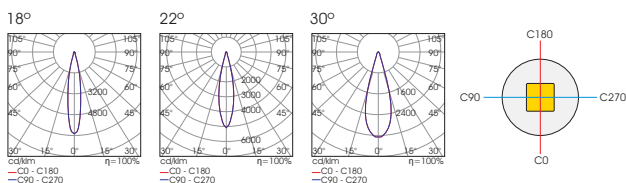

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.



Warm Dimming
1800K to 3000K






LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Extra
CASTALIA S ROUND WD 6.1W (CASTALIA SRWD6)	(B0518) 1800K-3000K 518lm	(FX) Fixed	(95) 95	(18) 18°	(WH) White	(A1) Analogue (1-10V)	(00) No Extra	
				(22) 22°		(DL) DALI		
				(30) 30°		(PC) Phase Cut		
				(BL) Black		(WL) Wireless **		
							(01) Emergency Kit	

* Other RAL colours available upon request
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA SRWD6-B0518-FX-80-22-WH-ND-00


Warm dimming 3000K to 1800K (6W)

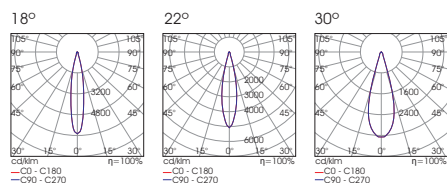

CASTALIA E

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for anti-glare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.



LIGHTSOURCE BY
bridgelux





Model (LED Power)	Colour Temperature* -	Initial LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Extra			
CASTALIA E ROUND 6.1W (CASTALIA ER6)	(27B0812)	2700K - 812lm	(AD) Adjustable	(80) 80	(18) 18°x22° (25) 25°x20° (34) 34°x28° (50) 50°x20°	(WH) White (BL) Black	(00) Without Driver	(00) No Extra (01) Emergency Kit			
	(30B0845)	3000K - 845lm					(ND) Non Dimmable				
	(40B0879)	4000K - 879lm					(A1) Analogue (1-10V)				
CASTALIA E SQUARE 6.1W (CASTALIA ES6)	(27B0677)	2700K - 677lm		(90) 90			(18) 18°x22° (25) 25°x20° (34) 34°x28° (50) 50°x20°		(WH) White (BL) Black	(00) Without Driver	(00) No Extra (01) Emergency Kit
	(30B0705)	3000K - 705lm								(ND) Non Dimmable	
	(40B0733)	4000K - 733lm								(A1) Analogue (1-10V)	
CASTALIA E ROUND 10.3W (CASTALIA ER10)	(27B1379)	2700K - 1379lm		(80) 80			(18) 18°x22° (25) 25°x20° (34) 34°x28° (50) 50°x20°		(WH) White (BL) Black	(DX) DMX	(00) No Extra (01) Emergency Kit
	(30B1435)	3000K - 1435lm								(DL) DALI	
	(40B1479)	4000K - 1479lm								(PB) Push Button	
CASTALIA E SQUARE 10.3W (CASTALIA ES10)	(27B1138)	2700K - 1138lm		(90) 90			(18) 18°x22° (25) 25°x20° (34) 34°x28° (50) 50°x20°		(WH) White (BL) Black	(PC) Phase Cut	(00) No Extra (01) Emergency Kit
	(30B1180)	3000K - 1180lm								(WL) Wireless ***	
	(40B1265)	4000K - 1265lm									

* CCT: 3500K, 5000K, 6500K available upon request.

** Other RAL colours available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA ER10-30B1435-AD-80-20-WH-ND-00

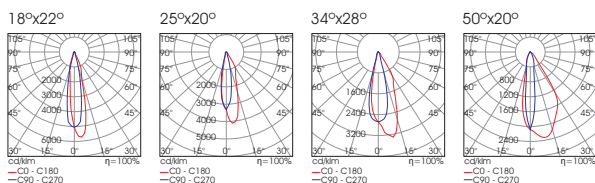

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.

Warm Dimming
1800K to 3000K








LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Extra
CASTALIA E ROUND WD 6.1W <i>(CASTALIA ERWD6)</i> CASTALIA E SQUARE WD 6.1W <i>(CASTALIA ESWD6)</i>	<i>(B0518)</i> 1800K-3000K 518lm	<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(18)</i> 18°x22°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(A1)</i> Analogue (1-10V)	<i>(00)</i> No Extra <i>(01)</i> Emergency Kit	
				<i>(25)</i> 25°x20°		<i>(DL)</i> DALI		
				<i>(34)</i> 34°x28°		<i>(PC)</i> Phase Cut		
				<i>(50)</i> 50°x20°		<i>(WL)</i> Wireless **		

* Other RAL colours available upon request
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA ERWD6-B0518-AD-80-20-WH-ND-00

Warm dimming 3000K to 1800K (6W)

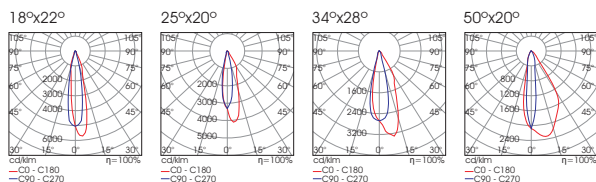

CASTALIA H

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for anti-glare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.



LIGHTSOURCE BY
bridgelux




Model (LED Power)	Colour Temperature* -	Initial LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Extra
CASTALIA H ROUND 6.1W (CASTALIA HR6)	(27B0812)	2700K - 812lm	(AD) Adjustable	(80) 80	(18) 18°x22° (25) 25°x20° (34) 34°x28° (30) 30°x50°	(WH) White (BL) Black	(00) Without Driver	(00) No Extra (01) Emergency Kit
	(30B0845)	3000K - 845lm					(ND) Non Dimmable	
	(40B0879)	4000K - 879lm					(A1) Analogue (1-10V)	
	(27B0677)	2700K - 677lm		(DX) DMX				
	(30B0705)	3000K - 705lm		(DL) DALI				
	(40B0733)	4000K - 733lm		(PB) Push Button				
CASTALIA H ROUND 10.3W (CASTALIA HR10)	(27B1379)	2700K - 1379lm	(AD) Adjustable	(80) 80	(18) 18°x22° (25) 25°x20° (34) 34°x28° (30) 30°x50°	(WH) White (BL) Black	(PC) Phase Cut	(00) No Extra (01) Emergency Kit
	(30B1435)	3000K - 1435lm					(WL) Wireless ***	
	(40B1479)	4000K - 1479lm						
	(27B1138)	2700K - 1138lm						
	(30B1180)	3000K - 1180lm						
	(40B1265)	4000K - 1265lm						

* CCT: 3500K, 5000K, 6500K available upon request.

** Other RAL colours available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA HR10-30B1435-AD-80-25-WH-ND-00

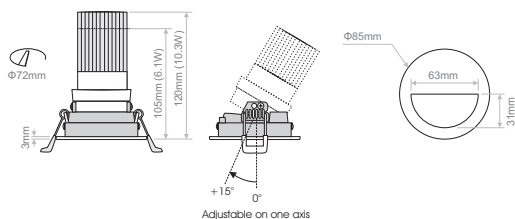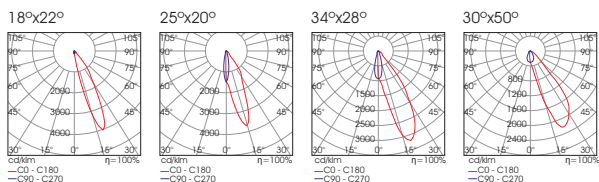

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.



Warm Dimming
1800K to 3000K






LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Extra
CASTALIA H ROUND WD 6.1W <i>(CASTALIA HRWD6)</i>	<i>(B0518)</i> 1800K-3000K 518lm	<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(18)</i> 18°x22°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(A1)</i> Analogue (1-10V)	<i>(00)</i> No Extra <i>(01)</i> Emergency Kit	
				<i>(25)</i> 25°x20°		<i>(DL)</i> DALI		
				<i>(34)</i> 34°x28°		<i>(PC)</i> Phase Cut		
				<i>(30)</i> 30°x50°		<i>(WL)</i> Wireless **		

* Other RAL colours available upon request
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA HRWD6-B0518-AD-80-25-WH-ND-00

Warm dimming 3000K to 1800K (6W)

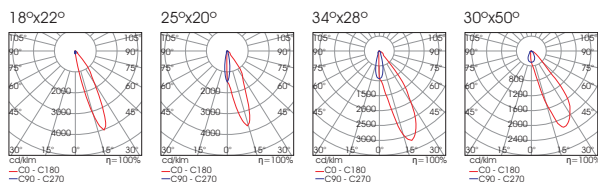

CASTALIA A

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.



LIGHTSOURCE BY
bridgelux





Model (LED Power)	Colour Temperature* - LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Extra	
CASTALIA A ROUND 6.1W <i>(CASTALIA AR6)</i>	<i>(27B0812)</i> 2700K - 812lm	<i>(FX)</i> Fixed	<i>(80)</i> 80			<i>(00)</i> Without Driver	<i>(00)</i> No Extra <i>(01)</i> Emergency Kit	
	<i>(30B0845)</i> 3000K - 845lm					<i>(ND)</i> Non Dimmable		
	<i>(40B0879)</i> 4000K - 879lm					<i>(A1)</i> Analogue (1-10V)		
	<i>(27B0677)</i> 2700K - 677lm		<i>(90)</i> 90			<i>(DX)</i> DMX		
	<i>(30B0705)</i> 3000K - 705lm					<i>(DL)</i> DALI		
	<i>(40B0733)</i> 4000K - 733lm					<i>(PB)</i> Push Button		
CASTALIA A ROUND 10.3W <i>(CASTALIA AR10)</i>	<i>(27B1379)</i> 2700K - 1379lm		<i>(80)</i> 80	<i>(18)</i> 18° <i>(24)</i> 24° <i>(32)</i> 32° <i>(55)</i> 55°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(PC)</i> Phase Cut		
	<i>(30B1435)</i> 3000K - 1435lm					<i>(DL)</i> DALI		
	<i>(40B1479)</i> 4000K - 1479lm					<i>(WL)</i> Wireless ***		
	<i>(27B1138)</i> 2700K - 1138lm		<i>(90)</i> 90					
	<i>(30B1180)</i> 3000K - 1180lm							
	<i>(40B1265)</i> 4000K - 1265lm							

* CCT: 3500K, 5000K, 6500K available upon request.

** Other RAL colours available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA AR10-30B1435-FX-80-24-WH-ND-00

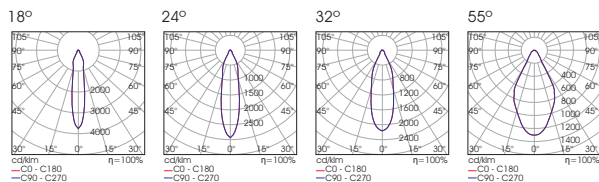

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.



Warm Dimming
1800K to 3000K

LIGHTSOURCE BY
bridgelux





Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Extra
CASTALIA A ROUND WD 6.1W <i>(CASTALIA ARWD6)</i>	<i>(B0518)</i> 1800K-3000K 518lm	<i>(FX)</i> Fixed	<i>(95)</i> 95	<i>(18)</i> 18°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(A1)</i> Analogue (1-10V)	<i>(00)</i> No Extra <i>(01)</i> Emergency Kit	
				<i>(24)</i> 24°		<i>(DL)</i> DALI		
				<i>(32)</i> 32°		<i>(PC)</i> Phase Cut		
				<i>(55)</i> 55°		<i>(WL)</i> Wireless **		

* Other RAL colours available upon request

** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: *CASTALIA ARWD6-B0518-FX-80-24-WH-ND-00*

Warm dimming 3000K to 1800K (6W)

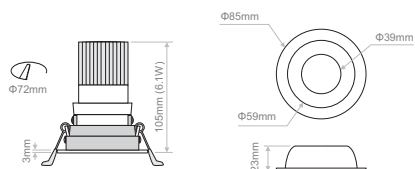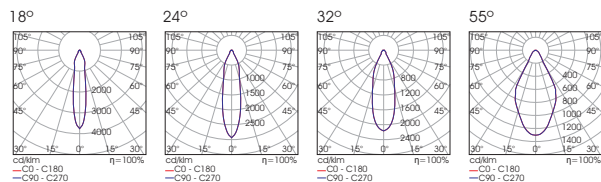

CASTALIA W

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for anti-glare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.



LIGHTSOURCE BY
bridgelux





Model (LED Power)	Colour Temperature* -	Initial LED Lumen	Type	CRI	Beam Angle	Colour**	Dimming Option	Extra
CASTALIA W ROUND 6.1W (CASTALIA WR6)	(27B0812)	2700K - 812lm	(AD) Adjustable	(80) 80	(22) 22°x18° (25) 25°x20° (34) 34°x28° (50) 50°x45°	(WH) White (BL) Black	(00) Without Driver	(00) No Extra (01) Emergency Kit
	(30B0845)	3000K - 845lm					(ND) Non Dimmable	
	(40B0879)	4000K - 879lm		(A1) Analogue (1-10V)				
	(27B0677)	2700K - 677lm		(DX) DMX				
	(30B0705)	3000K - 705lm		(DL) DALI				
	(40B0733)	4000K - 733lm		(PB) Push Button				
CASTALIA W ROUND 10.3W (CASTALIA WR10)	(27B1379)	2700K - 1379lm	(AD) Adjustable	(80) 80	(22) 22°x18° (25) 25°x20° (34) 34°x28° (50) 50°x45°	(WH) White (BL) Black	(PC) Phase Cut	(00) No Extra (01) Emergency Kit
	(30B1435)	3000K - 1435lm					(WL) Wireless ***	
	(40B1479)	4000K - 1479lm						
	(27B1138)	2700K - 1138lm						
	(30B1180)	3000K - 1180lm						
	(40B1265)	4000K - 1265lm						

* CCT: 3500K, 5000K, 6500K available upon request.

** Other RAL colours available upon request.

*** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA WR10-30B1435-AD-80-25-WH-ND-00

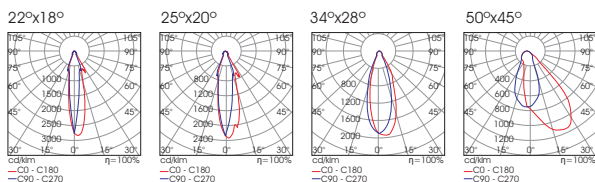

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.



Warm Dimming
1800K to 3000K






LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour*	Dimming Option	Extra
CASTALIA W ROUND WD 6.1W (CASTALIA WRWD6)	(B0518) 1800K-3000K	518lm	(AD) Adjustable	(95) 95	(22) 22°x18° (25) 25°x20° (34) 34°x28° (50) 50°x45°	(WH) White (BL) Black	(A1) Analogue (1-10V) (DL) DALI (PC) Phase Cut (WL) Wireless **	(00) No Extra (01) Emergency Kit

* Other RAL colours available upon request
** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: CASTALIA WRWD6-B0518-AD-80-25-WH-ND-00

Warm dimming 3000K to 1800K (6W)

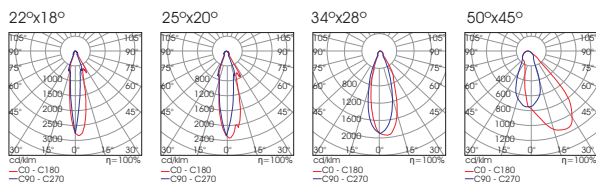

CASTALIA R Retrofit

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Maximum Consumption 50W.






Model	Outer Trim	Trim Colour*	Type	Lamp Holder
CASTALIA R Retrofit (CASTALIA RR)	(RD) Round	(WH) White	(FX) Fixed	(G1) GU5.3
	(SQ) Square	(BL) Black		



* Other RAL colours available upon request

Ordering Code Example: CASTALIA RR-RD-WH-FX-G1





Ceiling Recessed

CASTALIA S Retrofit

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Maximum Consumption 50W.




Model	Outer Trim	Trim Colour*	Type	Lamp Holder
CASTALIA S Retrofit (CASTALIA SR)	(RD) Round	(WH) White	(FX) Fixed	(G1) GU5.3
		(BL) Black		



* Other RAL colours available upon request

Ordering Code Example: CASTALIA SR-RD-WH-FX-G1



CASTALIA E Retrofit

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.
- Maximum Consumption 50W.






Model	Outer Trim	Trim Colour*	Type	Lamp Holder
CASTALIA E Retrofit (CASTALIA ER)	(RD) Round (SQ) Square	(WH) White (BL) Black	(AD) Adjustable	(G1) GU5.3



* Other RAL colours available upon request

Ordering Code Example: CASTALIA ER-RD-WH-AD-G1





Ceiling Recessed

CASTALIA H Retrofit

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.
- Maximum Consumption 50W.




Model	Outer Trim	Trim Colour*	Type	Lamp Holder
CASTALIA H Retrofit (CASTALIA HR)	(RD) Round	(WH) White (BL) Black	(AD) Adjustable	(G1) GU5.3



* Other RAL colours available upon request

Ordering Code Example: CASTALIA HR-RD-WH-AD-G1

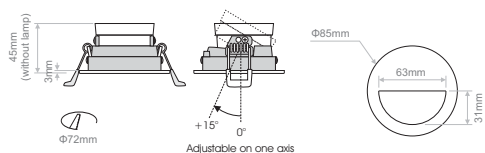

CASTALIA A Retrofit

Ceiling Recessed 

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Maximum Consumption 50W.




Model	Outer Trim	Trim Colour*	Type	Lamp Holder
CASTALIA A Retrofit (CASTALIA AR)	(RD) Round	(WH) White (BL) Black	(FX) Fixed	(G1) GU5.3



* Other RAL colours available upon request

Ordering Code Example: CASTALIA AR-RD-WH-FX-G1

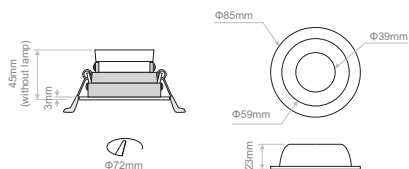



Ceiling Recessed

CASTALIA W Retrofit

- Recessed spots for indoor use.
- Ideal for antiglare lighting installations.
- Easy magnetic installation.
- Adjustable on one axis.
- Maximum Consumption 50W.





Model	Outer Trim	Trim Colour*	Type	Lamp Holder
CASTALIA W Retrofit (CASTALIA WR)	(RD) Round	(WH) White (BL) Black	(AD) Adjustable	(G1) GU5.3



* Other RAL colours available upon request

Ordering Code Example: CASTALIA WR-RD-WH-AD-G1





- Indoor use



Code	Colour*	Lamp Holder	Maximum Consumption		 Diameter	Dimensions	Weight	Type	IP 	 Not included
ASI.065	WHITE	GU10	50W	81mm	90mm	Φ90x58mm	0.14kg	Adjustable	IP20	

*Available in other colours upon request






Glass diffuser **500.354.002** for ASI.065 (available as extra)

- Dimmable through ELECTRON Constant Current LED drivers.
- Decorative lighting.
- Available in 30° & 60°.
- Ideal for ambient lighting in combination with ceiling recessed frames.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Code	No.LED	Colour Temperature*	Watt	Current**	⌀ Diameter	Beam Angle	
0.8W / 250mA							
LED.230	1	6.400K	0.8W	250mA	25mm	30°	Dimmable
LED.231	1	4.100K	0.8W	250mA	25mm	30°	Dimmable
LED.232	1	3.000K	0.8W	250mA	25mm	30°	Dimmable
LED.233	1	6.400K	0.8W	250mA	25mm	60°	Dimmable
LED.234	1	4.100K	0.8W	250mA	25mm	60°	Dimmable
LED.235	1	3.000K	0.8W	250mA	25mm	60°	Dimmable

*Other colours available upon request.




**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

1W / 350mA							
LED.227	1	6.400K	1W	350mA	25mm	30°	Dimmable
LED.228	1	4.100K	1W	350mA	25mm	30°	Dimmable
LED.229	1	3.000K	1W	350mA	25mm	30°	Dimmable
LED.236	1	6.400K	1W	350mA	25mm	60°	Dimmable
LED.237	1	4.100K	1W	350mA	25mm	60°	Dimmable
LED.238	1	3.000K	1W	350mA	25mm	60°	Dimmable

*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

Accessories (Barolo LEDs not included)



STARLIGHT SERIES

Ceiling Recessed 


- Dimmable Constant Current LED Spots 350mA.
- Ceiling or wall recessed spotlights ideal for decorative applications.
- Diffused light emission and chromed aluminium finish.
- Different shapes of diffusers.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Code	Model	No.LED	Colour Temperature*	Watt/Current**	Dimensions		Finish	
ALI.206	CRYSTAL	1	3000-3500K	1W / 350mA	Φ60x85mm	Diffused	Chromed Aluminium	Dimmable
ALI.207	CRYSTAL	1	5500-6000K	1W / 350mA	Φ60x85mm	Diffused	Chromed Aluminium	Dimmable
ALI.208	RHO MB	1	3000-3500K	1W / 350mA	Φ30x83mm	Diffused	Chromed Aluminium	Dimmable
ALI.209	RHO MB	1	5500-6000K	1W / 350mA	Φ30x83mm	Diffused	Chromed Aluminium	Dimmable
ALI.210	BALL	1	3000-3500K	1W / 350mA	Φ30x83mm	Diffused	Chromed Aluminium	Dimmable
ALI.211	BALL	1	5500-6000K	1W / 350mA	Φ30x83mm	Diffused	Chromed Aluminium	Dimmable
ALI.212	DIAMOND	1	3000-3500K	1W / 350mA	Φ23x95mm	Diffused	Chromed Aluminium	Dimmable
ALI.213	DIAMOND	1	5500-6000K	1W / 350mA	Φ23x95mm	Diffused	Chromed Aluminium	Dimmable
ALI.214	DIAMOND MINI	1	3000-3500K	0.5W / 160mA	Φ12x67mm	Diffused	Chromed Aluminium	Dimmable
ALI.215	DIAMOND MINI	1	5500-6000K	0.5W / 160mA	Φ12x67mm	Diffused	Chromed Aluminium	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.





- Ceiling or wall recessed spotlights ideal for decorative applications.
- Diffused light emission and chromed aluminium finish.

Lighting management options:

DALI/DMX512/PHASE CUT/IR/RF/Bluetooth

Model	No.LED	Colour	Watt	Voltage	Dimensions		Finish	
DIAMOND RGB /CC*	1	RGB	0.25W	5VDC	Φ23x65mm	Diffused	Chromed Aluminium	Dimmable

*CC=Common Cathode



- Dimmable Constant Current LED Spots 350/500mA
- Ceiling, wall recessed and semi-recessed spotlights.
- Ideal for ambient and decorative lighting applications.
- Made by pure aluminium.

Lighting management options:



On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Code	Model	No.LED	Colour Temperature*	Watt / Current**	Dimensions	Beam Angle	Finish		
ALI.216	CUBIC	1	3000-3500K	1W / 350mA	25x25x58mm	30°	Aluminium MAT	Dimmable	
ALI.217	CUBIC	1	5500-6000K	1W / 350mA	25x25x58mm	30°	Aluminium MAT	Dimmable	
ALI.218	EYE	1	3000-3500K	1W / 350mA	Φ23x36mm	120°	Nickel Mat	Dimmable	
ALI.219	EYE	1	5500-6000K	1W / 350mA	Φ23x36mm	120°	Nickel Mat	Dimmable	
ALI.220	EYE SQUARE	1	3000-3500K	1W / 350mA	23x23x36mm	120°	Nickel Mat	Dimmable	
ALI.221	EYE SQUARE	1	5500-6000K	1W / 350mA	23x23x36mm	120°	Nickel Mat	Dimmable	

*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.



FRAME / FRAME SQUARE

Ceiling Recessed 

- Dimmable Constant Current LED Spots 350mA
- Ceiling or wall recessed spotlights ideal for signage or decorative applications.
- Diffused light emissions.
- Round and Square shapes.
- High anti-glare protection.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




Code	Model	No.LED	Colour Temperature*	Watt / Current**	Dimensions		Finish		
ALI.222	FRAME	1	3000-3500K	1W / 350mA	Φ40x46mm	Diffused	Frost Diffuser	Dimmable	
ALI.223	FRAME	1	5500-6000K	1W / 350mA	Φ40x46mm	Diffused	Frost Diffuser	Dimmable	
ALI.224	FRAME SQUARE	1	3000-3500K	1W / 350mA	40x40x46mm	Diffused	Frost Diffuser	Dimmable	
ALI.225	FRAME SQUARE	1	5500-6000K	1W / 350mA	40x40x46mm	Diffused	Frost Diffuser	Dimmable	


*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

FRAME



FRAME SQUARE



- Dimmable Constant Current LED Spots 350/500mA
- Recessed spotlights with high anti-glare protection.
- Ideal for decorative lighting and retail applications.
- Trimless effect design, white painted body.
- Made by pure aluminium.

Lighting management options:



On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Code	Model	No.LED	Colour Temperature*	Watt / Current**	Dimensions		Finish		
ALI.226	TORN	1	3000-3500K	1W / 350mA	Φ35x50mm	60°	White Painted Aluminium	Dimmable	
ALI.227	TORN	1	5500-6000K	1W / 350mA	Φ35x50mm	60°	White Painted Aluminium	Dimmable	
ALI.228	TORN MINI	1	3000-3500K	1W / 350mA	Φ23x50mm	30°	White Painted Aluminium	Dimmable	
ALI.229	TORN MINI	1	5500-6000K	1W / 350mA	Φ23x50mm	30°	White Painted Aluminium	Dimmable	

*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.



DECO-S / DECO-M

Ceiling Recessed 



- Dimmable Constant Current LED Spots 350mA
- Recessed spotlights with high anti-glare protection.
- Ideal for decorative lighting and retail applications.
- High flexibility through adjustable movement.
- Made by pure aluminium, chromed aluminium finish.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Code	Model	No.LED	Colour Temperature*	Watt / Current**	Dimensions		Finish	
ALI.230	DECO-S	1	3000-3500K	1W / 350mA	Φ26x31mm	40°	Chromed Aluminium	Dimmable
ALI.231	DECO-S	1	5500-6000K	1W / 350mA	Φ26x31mm	40°	Chromed Aluminium	Dimmable
ALI.232	DECO-M	1	3000-3500K	1W / 350mA	Φ26x42mm	20°	Chromed Aluminium	Dimmable
ALI.233	DECO-M	1	5500-6000K	1W / 350mA	Φ26x42mm	20°	Chromed Aluminium	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

LUPUS

Monochromatic: Management through:

- DMX 512 controllers & converters 0-10V or 1-10V or simple push buttons.
- Wireless IR & RF control units.
- DALI Protocol devices.


- Dimmable through ELECTRON Constant Current LED drivers.
- Ideal for ambient & decorative lighting.



Code	Model	No.LED	Colour*	Watt	Current**	Diameter		
ALI.120	LUPUS	1	COOL WHITE	3W	350mA	35mm	25°	Dimmable
ALI.121	LUPUS	1	WARM WHITE	3W	350mA	35mm	25°	Dimmable

*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.




- Dimmable through ELECTRON Constant Current LED drivers.
- Ideal for decorative lighting.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




Code	Model	No.LED	Colour*	Watt	Current**	Diameter	Beam Angle	Features
ALI.101	ULTRA	1	COOL WHITE	1W	350mA	25mm	120°	Dimmable
ALI.102	ULTRA	1	WARM WHITE	1W	350mA	25mm	120°	Dimmable
ALI.104	ULTRA	1	BLUE	1W	350mA	25mm	120°	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.


ALI.111	ACRYLIC	1	COOL WHITE	1W	350mA	48mm	DIFUSE	Dimmable
ALI.112	ACRYLIC	1	WARM WHITE	1W	350mA	48mm	DIFUSE	Dimmable
ALI.113	ACRYLIC	1	BLUE	1W	350mA	48mm	DIFUSE	Dimmable
ALI.114	ACRYLIC	1	RED	1W	350mA	48mm	DIFUSE	Dimmable
ALI.115	ACRYLIC	1	GREEN	1W	350mA	48mm	DIFUSE	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.


ALI.107	ANTI-GLARE	1	COOL WHITE	1W	350mA	48mm	120°	Dimmable
ALI.108	ANTI-GLARE	1	WARM WHITE	1W	350mA	48mm	120°	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.


ALI.109	MOVABLE	1	COOL WHITE	1W	350mA	49.5mm	30°	Dimmable
ALI.110	MOVABLE	1	WARM WHITE	1W	350mA	49.5mm	30°	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

ALI.116	SPOTLIGHT	1	COOL WHITE	1W	350mA	364x49.5mm	45°	Dimmable
ALI.117	SPOTLIGHT	1	WARM WHITE	1W	350mA	364x49.5mm	45°	Dimmable



*Other colours available upon request.

**Adjustable intensity with ELECTRON dimmable constant current LED drivers.

SHARP

ROUND/SQUARE

Ceiling Recessed 




Code	Model	Lamp Holder	Maximum Consumption	Voltage				IP 	
PCR.023	SHARP ROUND	Gx5.3	35W	12VAC	Not included	0.42Kg	80x80mm	IP20	
PCR.022	SHARP SQUARE	Gx5.3	35W	12VAC	Not included	0.36Kg	80x80mm	IP20	

*Suitable for plasterboard 9-15mm


PCR.023
SHARP ROUND

Light Emission

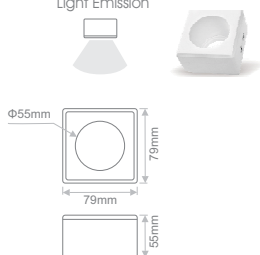

PCR.022
SHARP SQUARE

Light Emission

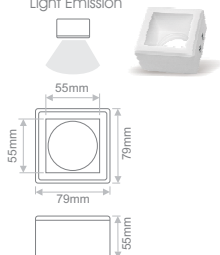

ROUND/SQUARE SHORT/SQUARE WASH 45°



Code	Model	Lamp Holder	Maximum Consumption	Voltage					
PCR.007	SEAMLESS ROUND	Gx5.3	35W	12VAC	Not included	0.34Kg	Φ 132mm	IP20	
PCR.001	SEAMLESS SQUARE SHORT	Gx5.3	35W	12VAC	Not included	0.20Kg	102x102mm	IP20	


*Suitable for plasterboard 12mm

PCR.003	SEAMLESS SQUARE WASH 45°	Gx5.3	35W	12VAC	Not included	0.55Kg	122x122mm	IP20	
---------	--------------------------	-------	-----	-------	--------------	--------	-----------	------	--

*Suitable for plasterboard 9mm-15mm


PCR.007
SEAMLESS ROUND

Light Emission




PCR.001
SEAMLESS SQUARE SHORT

Light Emission



PCR.003
SEAMLESS SQUARE WASH 45°


Light Emission






Code	Model	Lamp Holder	Maximum Consumption	Voltage					
PCR.027	VERTICO	Gx5.3	35W	12VAC	Not included	1.05Kg	146x146mm	IP20	

*Suitable for plasterboard 9-15mm



SEAMLESS SQUARE/SQUARE x2

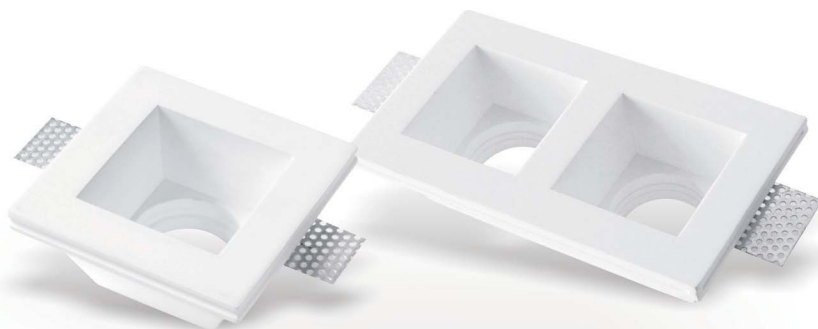


Code	Model	Lamp Holder	Maximum Consumption	Voltage				IP 	
PCR.002	SEAMLESS SQUARE	Gx5.3	35W	12VAC	Not included	0.44Kg	120x120mm	IP20	
PCR.004	SEAMLESS SQUARE x2	2xGx5.3	2x35W	12VAC	Not included	0.94Kg	120x217mm	IP20	

*Suitable for plasterboard 12mm


PCR.002
SEAMLESS SQUARE

Light Emission



PCR.004
SEAMLESS SQUARE x2

Light Emission



SEAMLESS SQUARE

ADJUSTABLE/ADJUSTABLE x2

Ceiling Recessed 



Code	Model	Lamp Holder	Maximum Consumption	Voltage				IP 	
PCR.005	SEAMLESS SQUARE ADJUSTABLE	Gx5.3	35W	12VAC	Not included	0.84Kg	157x157mm	IP20	
PCR.006	SEAMLESS SQUARE ADJUSTABLE x2	2xGx5.3	2x35W	12VAC	Not included	1.56Kg	157x282mm	IP20	



*Suitable for plasterboard 9mm-15mm

PCR.005

SEAMLESS SQUARE ADJUSTABLE



Light Emission




PCR.006

SEAMLESS SQUARE ADJUSTABLE x2



Light Emission



ACC.206
Lamp Holder

SEAMLESS

ROUND ADJ/ROUND ADJ x2/CURVE ADJ




Code	Model	Lamp Holder	Maximum Consumption	Voltage				IP 	
PCR.008	SEAMLESS ROUND ADJUSTABLE	Gx5.3	35W	12VAC	Not included	0.72Kg	Φ 157mm	IP20	
PCR.009	SEAMLESS ROUND ADJUSTABLE x2	2xGx5.3	2x35W	12VAC	Not included	1.54Kg	158x258mm	IP20	
PCR.010	SEAMLESS CURVE ADJUSTABLE	Gx5.3	35W	12VAC	Not included	0.68Kg	Φ 157mm	IP20	

*Suitable for plasterboard 9mm-15mm


PCR.008
SEAMLESS ROUND
ADJUSTABLE

Light Emission




PCR.009
SEAMLESS ROUND
ADJUSTABLE x2

Light Emission



PCR.010
SEAMLESS CURVE
ADJUSTABLE

Light Emission



INVISIBLE

SQUARE ADJ/SQUARE/ROUND


Ceiling Recessed 



Code	Model	Lamp Holder	Maximum Consumption	Voltage				IP 	
PCR.011	INVISIBLE SQUARE ADJUSTABLE	AR111	50W	12VAC	Not included	2.14Kg	252x252mm	IP20	
PCR.015	INVISIBLE SQUARE	AR111	50W	12VAC	Not included	1.53Kg	202x202mm	IP20	
PCR.016	INVISIBLE ROUND	AR111	50W	12VAC	Not included	0.97Kg	Φ 202mm	IP20	


PCR.011
INVISIBLE SQUARE
ADJUSTABLE

Light Emission

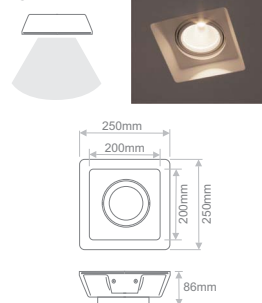


PCR.015
INVISIBLE SQUARE

Light Emission

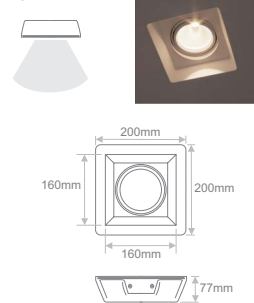

PCR.016
INVISIBLE ROUND

Light Emission

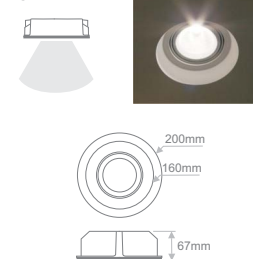

INVISIBLE

ROUND ADJ/ROUND ADJ x2/CURVE ADJ




Code	Model	Lamp Holder	Maximum Consumption	Voltage					
PCR.012	INVISIBLE ROUND ADJUSTABLE	AR111	50W	12VAC	Not included	2.06Kg	Φ 252mm	IP20	
PCR.013	INVISIBLE ROUND ADJUSTABLE x2	2xAR111	2x50W	12VAC	Not included	3.74Kg	252x408mm	IP20	
PCR.014	INVISIBLE CURVE ADJUSTABLE	AR111	50W	12VAC	Not included	1.22Kg	Φ 222mm	IP20	

*Suitable for plasterboard 9mm-15mm


PCR.012
INVISIBLE ROUND
ADJUSTABLE

Light Emission




PCR.013
INVISIBLE ROUND
ADJUSTABLE x2


Light Emission



PCR.014
INVISIBLE CURVE
ADJUSTABLE

Light Emission



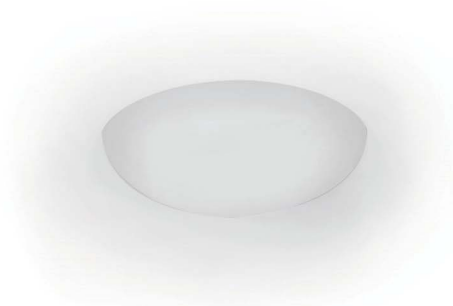

EXENS



SPACE-O





SPACE-Z


Code	Model	Lamp Holder	Maximum Consumption	Voltage					
PCR.018	EXENS	2xE27	2x18W	220-240VAC	Not included	2.87Kg	Φ 332mm	IP20	
PCR.019	SPACE-O	2xE27	2x18W	220-240VAC	Not included	4.82Kg	Φ 262mm	IP20	
PCR.020	SPACE-Z	2xE27	2x18W	220-240VAC	Not included	2.5Kg	242x242mm	IP20	

*Suitable for plasterboard 9mm-15mm


PCR.018
EXENS



PCR.019
SPACE-O



PCR.020
SPACE-Z







Code	Model	Lamp Holder	Maximum Consumption	Voltage				IP 	
PCR.017	ART-R	E27	40W	220-240VAC	Not included	2.3Kg	Φ 273mm	IP20	
PCR.021	TEIDE XXL	4xE27	160W	220-240VAC	Not included	16.3Kg	Φ 1040mm	IP20	

*Suitable for plasterboard 9-15mm


PCR.017
ART-R

Light Emission



PCR.021
TEIDE XXL

Light Emission




DORADO



Code	Model	LED Strip*			IP 	
PCR.024	DORADO	Not included	7.18Kg	602x602mm	IP20	

*WARM WHITE / NEUTRAL WHITE / COOL WHITE / RGB at 28.8W, 24VDC upon request

**Suitable for plasterboard 9-15mm



ALGEDI SERIES

Ceiling Recessed 

- Recessed movable & non-movable spots
- For MR16 lamps
- Indoor use
- Ideal for general and ambient lighting




ALGEDI

Code	Model	Colour	Lamp	Maximum Consumption		Ø Diameter	Type	 Not included
------	-------	--------	------	---------------------	---	------------	------	--


Fixed

ASI.007	ALGEDI	NICKEL MAT	MR16	50W	60mm	77mm	Fixed	
ASI.008	ALGEDI	NICKEL	MR16	50W	60mm	77mm	Fixed	
ASI.009	ALGEDI	WHITE	MR16	50W	60mm	77mm	Fixed	
ASI.010	ALGEDI	BLACK	MR16	50W	60mm	77mm	Fixed	
ASI.011	ALGEDI	GOLDEN MAT	MR16	50W	60mm	77mm	Fixed	
ASI.012	ALGEDI	GOLD	MR16	50W	60mm	77mm	Fixed	
ASI.028	ALGEDI	GREY	MR16	50W	60mm	77mm	Fixed	
ASI.032	ALGEDI	BRUSH NICKEL	MR16	50W	60mm	77mm	Fixed	
ASI.033	ALGEDI	ALUMINIUM	MR16	50W	60mm	77mm	Fixed	



Adjustable

ASI.001	ALGEDI	NICKEL MAT	MR16	50W	72mm	81mm	Adjustable	
ASI.002	ALGEDI	NICKEL	MR16	50W	72mm	81mm	Adjustable	
ASI.003	ALGEDI	WHITE	MR16	50W	72mm	81mm	Adjustable	
ASI.004	ALGEDI	BLACK	MR16	50W	72mm	81mm	Adjustable	
ASI.005	ALGEDI	GOLDEN MAT	MR16	50W	72mm	81mm	Adjustable	
ASI.006	ALGEDI	GOLD	MR16	50W	72mm	81mm	Adjustable	
ASI.029	ALGEDI	GREY	MR16	50W	72mm	81mm	Adjustable	
ASI.034	ALGEDI	BRUSH NICKEL	MR16	50W	72mm	81mm	Adjustable	
ASI.035	ALGEDI	ALUMINIUM	MR16	50W	72mm	81mm	Adjustable	



ALGEDI ALUMINIUM


Code	Model	Colour	Lamp	Maximum Consumption		Ø Diameter	Type	 Not included
------	-------	--------	------	---------------------	---	------------	------	--

Fixed

ASI.045	ALGEDI ALUMINIUM	ALUMINIUM	MR16	50W	77mm	91mm	Fixed	
---------	------------------	-----------	------	-----	------	------	-------	--

Adjustable

ASI.013	ALGEDI ALUMINIUM	ALUMINIUM	MR16	50W	77mm	91mm	Adjustable	
---------	------------------	-----------	------	-----	------	------	------------	--






ALGEDI ANTI-GLARE

Code	Model	Colour*	Lamp	Maximum Consumption		Type
ASI.040	ALGEDI ANTI-GLARE	GREY	MR16	50W	Φ82mm	Adjustable
ASI.041	ALGEDI ANTI-GLARE	BRUSH NICKEL	MR16	50W	Φ83mm	Adjustable
ASI.042	ALGEDI ANTI-GLARE	GREY	MR16	50W	77x66mm	Adjustable

*Available in other colours upon request

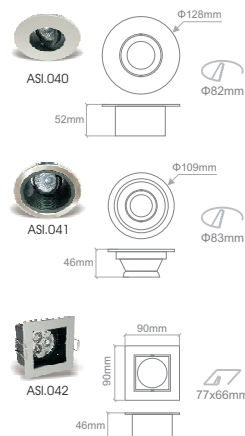


ALGEDI HIGH-MOVABLE

Code	Model	Colour	Lamp	Maximum Consumption		Type
ASI.043	ALGEDI HIGH-MOVABLE	BRUSH NICKEL	MR16	50W	90mm	Adjustable
ASI.044	ALGEDI HIGH-MOVABLE	BRUSH NICKEL	MR16	50W	89mm	Adjustable




ALGEDI DECO

Code	Model	Colour	Lamp	Maximum Consumption		Type
ASI.039	ALGEDI DECO	SAND NICKEL	MR16	50W	57mm	Fixed



LAMP HOLDERS


Code	Description
ACC.201	LAMP HOLDER GU5.3
ACC.202	LAMP HOLDER GU10
ACC.203	LAMP HOLDER GU5.3 WITH BASE
ACC.204	LAMP HOLDER GU10 WITH BASE



- Recessed movable & non-movable spots.
- Die-cast aluminium.
- For MR11 lamps.
- Indoor use.
- Ideal for promotional & accent lighting, object illumination, etc.



Code	Colour	Lamp	Maximum Consumption		 Diameter	Type	 Not included
<i>Fixed</i>							
ASI.024	WHITE	MR11	35W	42mm	55mm	Fixed	
ASI.025	BLACK	MR11	35W	42mm	55mm	Fixed	
ASI.026	GOLDEN MAT	MR11	35W	42mm	55mm	Fixed	
ASI.027	GOLD	MR11	35W	42mm	55mm	Fixed	
ASI.036	BRUSH NICKEL	MR11	35W	42mm	55mm	Fixed	
ASI.030	GREY	MR11	35W	42mm	55mm	Fixed	
<i>Adjustable</i>							
ASI.018	WHITE	MR11	35W	56mm	61mm	Adjustable	
ASI.019	BLACK	MR11	35W	56mm	61mm	Adjustable	
ASI.020	GOLDEN MAT	MR11	35W	56mm	61mm	Adjustable	
ASI.021	GOLD	MR11	35W	56mm	61mm	Adjustable	
ASI.037	BRUSH NICKEL	MR11	35W	56mm	61mm	Adjustable	
ASI.031	GREY	MR11	35W	56mm	61mm	Adjustable	





Ceiling Recessed

- Recessed movable & non-movable spots.
- Die-cast aluminium.
- For AR111 lamps.
- Indoor use.
- Ideal for general lighting in shops, exhibition rooms, multi-purpose halls, etc.


ALTIMAR




Code	Colour	Lamp	Maximum Consumption		Diameter	Type
<i>Fixed</i>						
ASI.038	ALUMINIUM	AR111	100W	135mm	165mm	Fixed
<i>Adjustable</i>						
ASI.015	GREY	AR111	100W	141mm	158mm	Adjustable



ASI.038
Fixed



ASI.015
Adjustable




ALDA

- Recessed movable spot.
- Die-cast aluminium.
- For CDMT lamps.
- Indoor use.
- Ideal for general lighting in shops, exhibition rooms, multi-purpose halls, etc.



Code	Colour	Lamp	Lamp Holder	Maximum Consumption		Diameter	Type	
ASI.060	GREY	CDM-T	G12	1x70W	145mm	155mm	Adjustable	10°/24°/45°




ALGEDI L TRIMLESS

- Recessed movable spot.
- Indoor use.
- Ideal for general lighting in shops, exhibition rooms, multi-purpose halls, etc.



Code	Colour	Lamp	Lamp Holder	Maximum Consumption		Diameter	Type
ASI.048	WHITE	AR111	G53	50W	193mm	202mm	Adjustable
ASI.049	WHITE	CDM-R111	GX8.5	70W	193mm	202mm	Adjustable




ALCYONE ALUMINIUM

Ceiling Recessed 

- Decorative Recessed Aluminium Luminaires with single movement
- For MR16 lamps
- Indoor use
- Ideal for general and decorative lighting in hotels, exhibitions, restaurants, houses etc.



Code	Colour	Lamp	Maximum Consumption		Dimensions	Type
ASI.100	ALUMINIUM	1XMR16	1X50W	Φ80mm	93x 93x25mm	Adjustable
ASI.101	ALUMINIUM	2XMR16	2X50W	77x154mm	93x173x25mm	Adjustable
ASI.102	ALUMINIUM	3XMR16	3X50W	77x234mm	93x252x25mm	Adjustable
ASI.103/RECTANGULAR	ALUMINIUM	4XMR16	4X50W	77x315mm	93x333x25mm	Adjustable
ASI.104/SQUARE	ALUMINIUM	4XMR16	4X50W	154x154mm	173x173x25mm	Adjustable

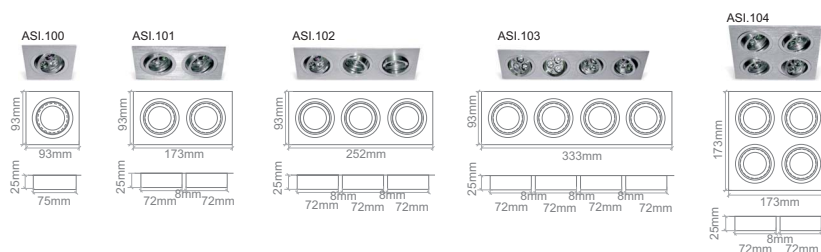


MIRAM

- Decorative Recessed Luminaires with double movement
- Aluminium face
- For MR16 lamps
- Indoor use
- Ideal for general and decorative lighting in coffee shops, lobbies, exhibition rooms, etc.




Code	Colour	Lamp	Maximum Consumption		Dimensions	Type
ASI.105	ALUMINIUM FACE	1XMR16	1X50W	90x82mm	122x122x110mm	Adjustable
ASI.106	ALUMINIUM FACE	2XMR16	2X50W	90x195mm	121x225x110mm	Adjustable
ASI.107	ALUMINIUM FACE	3XMR16	3X50W	90x280mm	122x311x110mm	Adjustable
ASI.108/RECTANGULAR	ALUMINIUM FACE	4XMR16	4X50W	90x365mm	122x398x110mm	Adjustable
ASI.109/SQUARE	ALUMINIUM FACE	4XMR16	4X50W	175x175mm	206x206x110mm	Adjustable

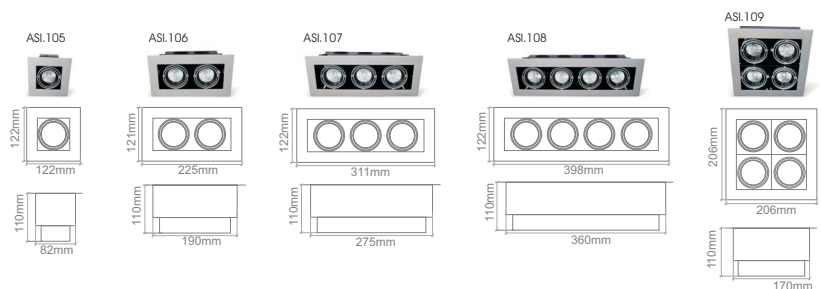




Ceiling Recessed

- Decorative recessed luminaires with double movement.
- For AR111 lamps.
- Indoor use.
- Ideal for general and decorative lighting in hotels, exhibitions, restaurants, houses etc.




Code	Colour	Lamp	Maximum Consumption		Dimensions	Type
ASI.121	BLACK	1XAR111	1X100W	164x164mm	158x158x180mm	Adjustable
ASI.122	BLACK	2XAR111	2X100W	298x164mm	295x158x180mm	Adjustable
ASI.123	BLACK	3XAR111	3X100W	447x164mm	408x158x180mm	Adjustable




MIRAM L

- Decorative Recessed Luminaires with double movement
- Aluminium face
- For AR111 lamps
- Indoor use
- Ideal for general lighting in shops, shop windows, malls, conference rooms, buildings, etc.




Code	Colour	Lamp	Maximum Consumption		Dimensions	Type
ASI.110	ALUMINIUM FACE	1XAR111	1X100W	160x160mm	201x201x122mm	Adjustable
ASI.111	ALUMINIUM FACE	2XAR111	2X100W	160x325mm	201x367x122mm	Adjustable
ASI.112	ALUMINIUM FACE	3XAR111	3X100W	160x470mm	201x510x122mm	Adjustable
ASI.113/RECTANGULAR	ALUMINIUM FACE	4XAR111	4X100W	160x625mm	201x665x122mm	Adjustable
ASI.114/SQUARE	ALUMINIUM FACE	4XAR111	4X100W	310x310mm	351x351x122mm	Adjustable

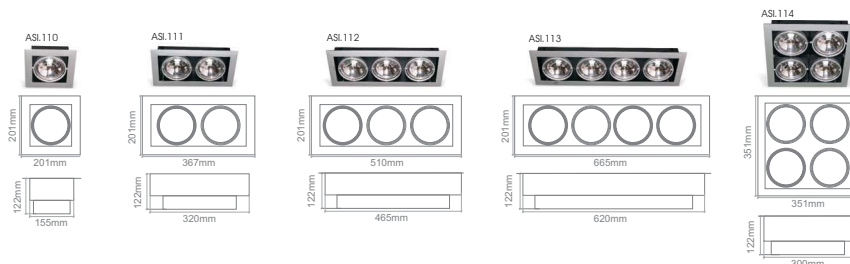


BETA TRIMLESS

Ceiling Recessed 

- Decorative recessed luminaires with double movement.
- For MR16 lamps
- Indoor use
- Ideal for general and decorative lighting in hotels, exhibitions, restaurants, houses etc.




Code	Colour	Lamp	Maximum Consumption		Dimensions	Type	
ASI.115	BLACK	1XMR16	1X50W	96x96mm	95x95x140mm	Adjustable	Not included
ASI.116	BLACK	2XMR16	2X50W	177x96mm	176x95x140mm	Adjustable	
ASI.117	BLACK	3XMR16	3X50W	256x96mm	255x95x140mm	Adjustable	

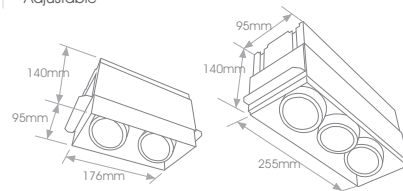

DELTA

- Decorative recessed luminaires with double movement.
- For MR16 lamps
- Indoor use
- Ideal for general and decorative lighting in hotels, exhibitions, restaurants, houses etc.



Code	Colour	Lamp	Maximum Consumption		Dimensions	Type	
ASI.118	WHITE	1XMR16	1X50W	97x97mm	119x119x135mm	Adjustable	Not included
ASI.119	WHITE	2XMR16	2X50W	180x97mm	201x119x135mm	Adjustable	
ASI.120	WHITE	3XMR16	3X50W	257x97mm	280x119x135mm	Adjustable	

