

INTERIOR LINEAR



LINILINE RECESSED

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage
LINILINE RECESSED (LINILINE RC)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC
		(25) 2500K		(30L) 30° Linear lens	(16W086) 15,7W / 78cm	
		(27) 2700K		(50L) 50° Linear lens	(21W103) 21W / 103cm	
		(30) 3000K		(70L) 70° Linear lens	(26W120) 26,3W / 128cm	
		(40) 4000K		(90F) 90° Frosted Cover	(32W153) 31,5W / 153cm	
		(57) 5700K		(90C) 90° Clear Cover	(42W203) 42W / 203cm	
				(100M) 100° Milky Cover		
				(14S) 14° Symmetrical lens		
				(27S) 27° Symmetrical lens		
				(49S) 49° Symmetrical lens		
				(40O) 40°x13° Oval lens		

* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE RC-AN-3080-30L-21W103-24

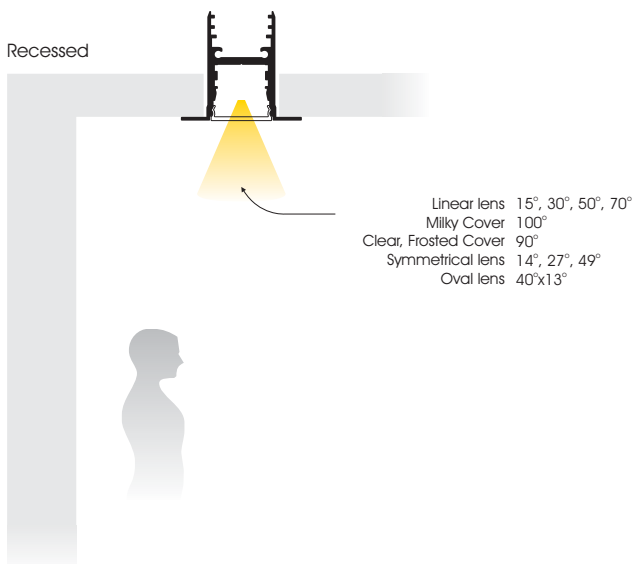

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



LINILINE RECESSED ANTIGLARE

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage
LINILINE RECESSED ANTIGLARE (LINILINE RCAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC
		(25) 2500K		(30L) 30° Linear lens	(16W086) 15,7W / 78cm	
		(27) 2700K		(50L) 50° Linear lens	(21W103) 21W / 103cm	
		(30) 3000K		(70L) 70° Linear lens	(26W120) 26,3W / 128cm	
		(40) 4000K		(80M) 80° Milky Cover	(32W153) 31,5W / 153cm	
		(57) 5700K		(75C) 75° Clear Cover	(42W203) 42W / 203cm	
				(75F) 75° Frosted Cover		
				(14S) 14° Symmetrical lens		
				(27S) 27° Symmetrical lens		
				(49S) 49° Symmetrical lens		
				(40O) 40°x13° Oval lens		

* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE RCAG-AN-3080-30L-21W103-24

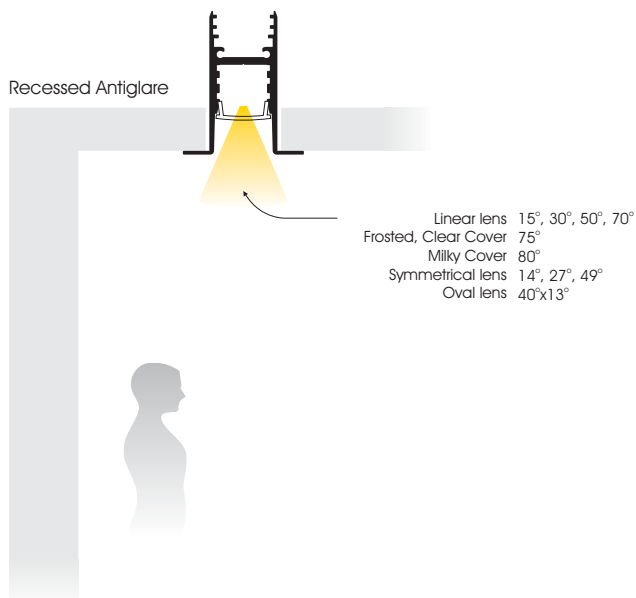

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




LINILINE TRIMLESS

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

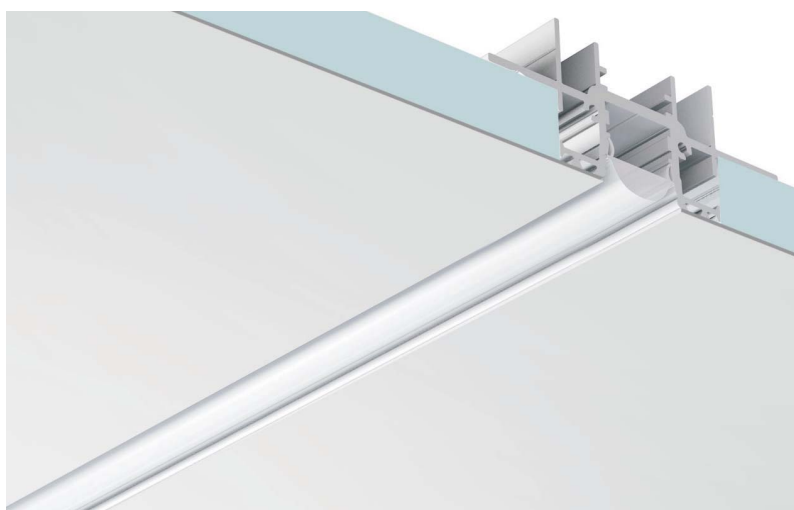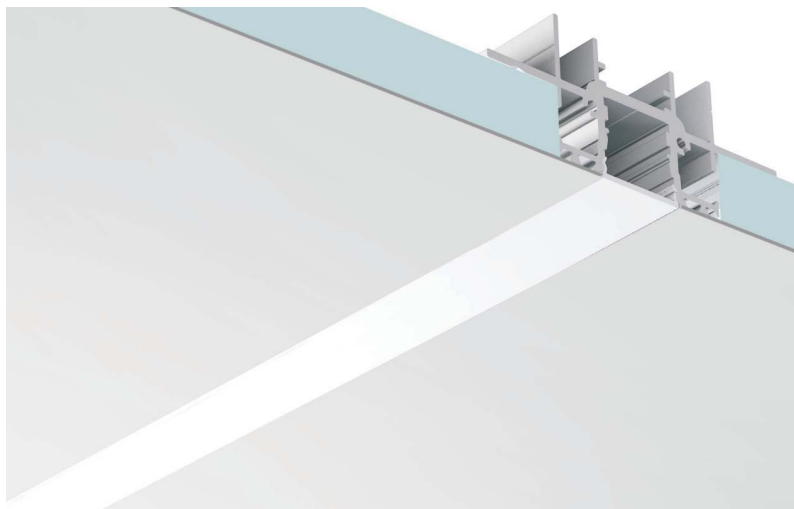

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage
LINILINE TRIMLESS (LINILINE TR)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC
		(25) 2500K		(30L) 30° Linear lens	(16W086) 15,7W / 78cm	
		(27) 2700K		(50L) 50° Linear lens	(21W103) 21W / 103cm	
		(30) 3000K		(70L) 70° Linear lens	(26W120) 26,3W / 128cm	
		(40) 4000K		(90F) 90° Frosted Cover	(32W153) 31,5W / 153cm	
		(57) 5700K		(90C) 90° Clear Cover	(42W203) 42W / 203cm	
				(100M) 100° Milky Cover		
				(14S) 14° Symmetrical lens		
				(27S) 27° Symmetrical lens		
				(49S) 49° Symmetrical lens		
				(40O) 40°x13° Oval lens		


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE TR-AN-3080-30L-21W103-24

Trimless

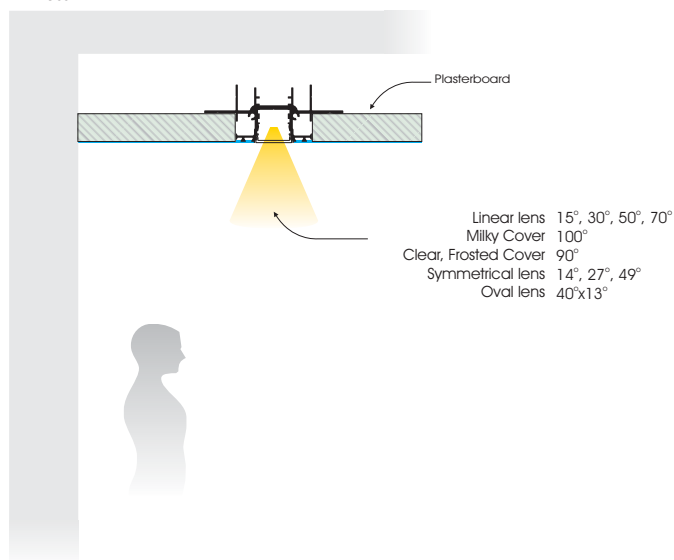

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




LINILINE TRIMLESS ANTIGLARE

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

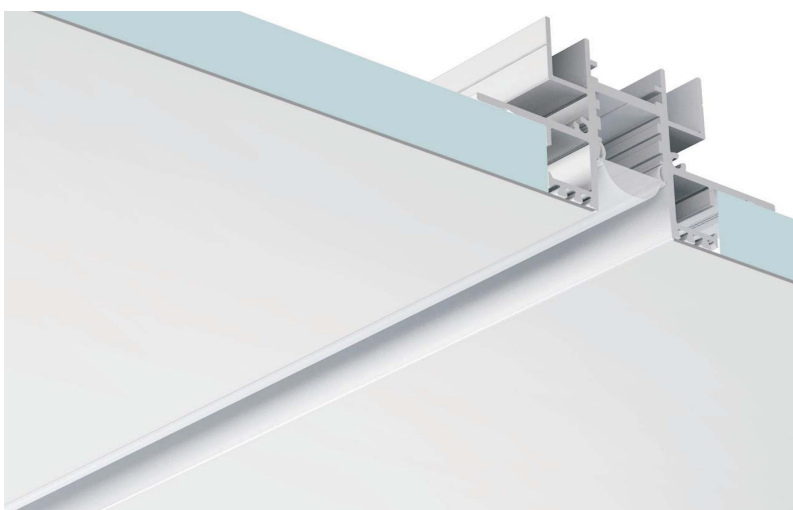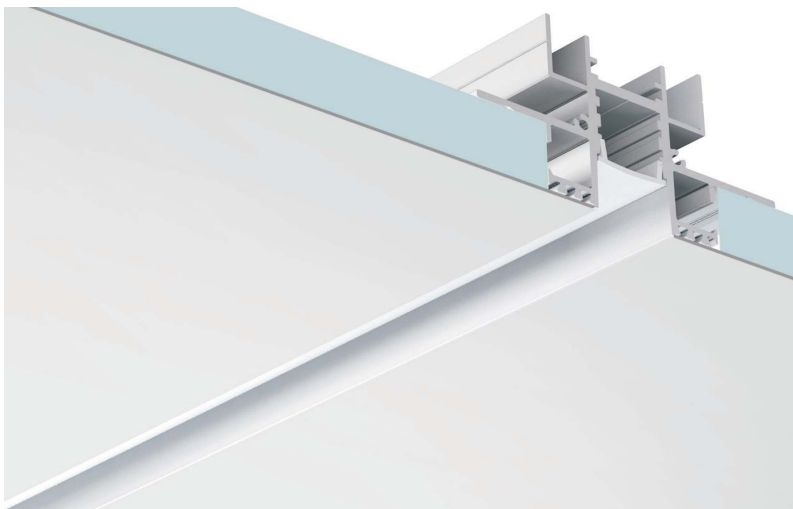

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage
LINILINE TRIMLESS ANTIGLARE (LINILINE TRAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC
		(25) 2500K		(30L) 30° Linear lens	(16W086) 15,7W / 78cm	
		(27) 2700K		(50L) 50° Linear lens	(21W103) 21W / 103cm	
		(30) 3000K		(70L) 70° Linear lens	(26W120) 26,3W / 128cm	
		(40) 4000K		(80M) 80° Milky Cover	(32W153) 31,5W / 153cm	
		(57) 5700K		(75C) 75° Clear Cover	(42W203) 42W / 203cm	
				(75F) 75° Frosted Cover		
				(14S) 14° Symmetrical lens		
				(27S) 27° Symmetrical lens		
				(49S) 49° Symmetrical lens		
				(40O) 40°x13° Oval lens		


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE TRAG-AN-3080-30L-21W103-24

Trimless Antiglare

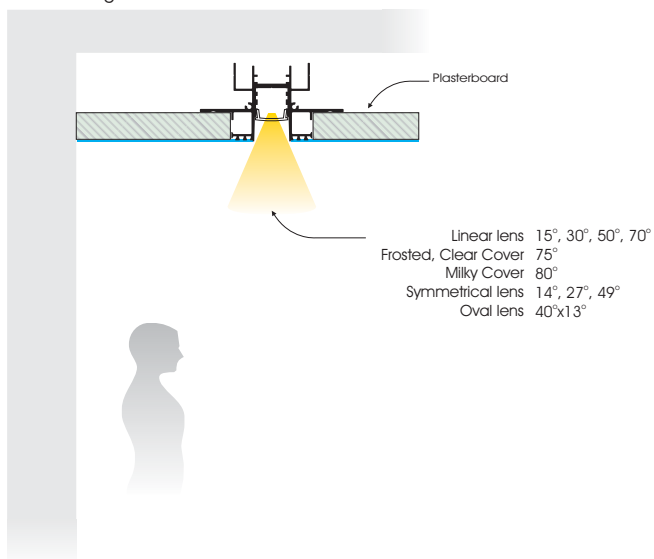

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



LINILINE SURFACE

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage
LINILINE SURFACE (LINILINE SF)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC
		(25) 2500K		(30L) 30° Linear lens	(16W086) 15,7W / 78cm	
		(27) 2700K		(50L) 50° Linear lens	(21W103) 21W / 103cm	
		(30) 3000K		(70L) 70° Linear lens	(26W120) 26,3W / 128cm	
		(40) 4000K		(90F) 90° Frosted Cover	(32W153) 31,5W / 153cm	
		(57) 5700K		(90C) 90° Clear Cover	(42W203) 42W / 203cm	
				(100M) 100° Milky Cover		
				(14S) 14° Symmetrical lens		
				(27S) 27° Symmetrical lens		
				(49S) 49° Symmetrical lens		
				(40O) 40°x13° Oval lens		


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE SF-AN-3080-30L-21W103-24

Surface

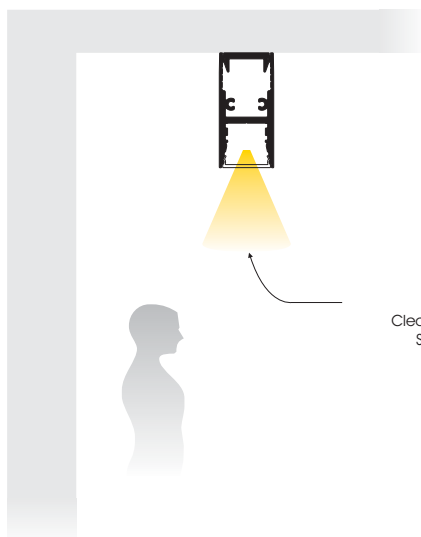

Linear lens 15°, 30°, 50°, 70°
Milky Cover 100°
Clear, Frosted Cover 90°
Symmetrical lens 14°, 27°, 49°
Oval lens 40°x13°

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version


LINILINE SURFACE ANTIGLARE

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage
LINILINE SURFACE ANTIGLARE (LINILINE SFAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC
		(25) 2500K		(30L) 30° Linear lens	(16W086) 15,7W / 78cm	
		(27) 2700K		(50L) 50° Linear lens	(21W103) 21W / 103cm	
		(30) 3000K		(70L) 70° Linear lens	(26W120) 26,3W / 128cm	
		(40) 4000K		(80M) 80° Milky Cover	(32W153) 31,5W / 153cm	
		(57) 5700K		(75C) 75° Clear Cover	(42W203) 42W / 203cm	
				(75F) 75° Frosted Cover		
				(14S) 14° Symmetrical lens		
				(27S) 27° Symmetrical lens		
				(49S) 49° Symmetrical lens		
				(40O) 40°x13° Oval lens		


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE SFAG-AN-3080-30L-21W103-24

Surface Antiglare

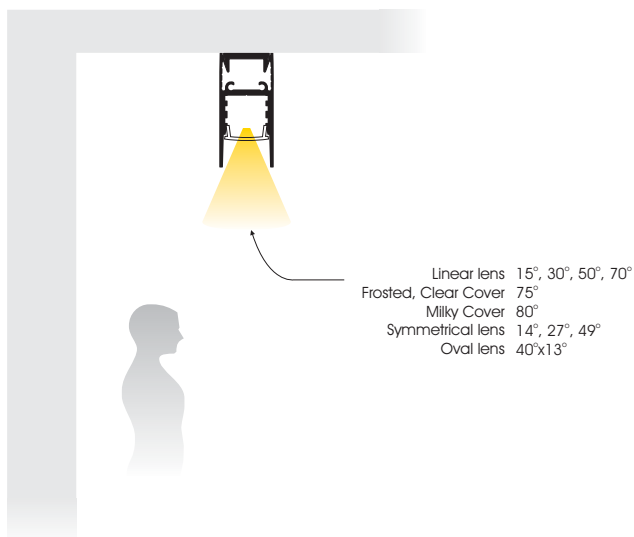

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



LINILINE PENDANT

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

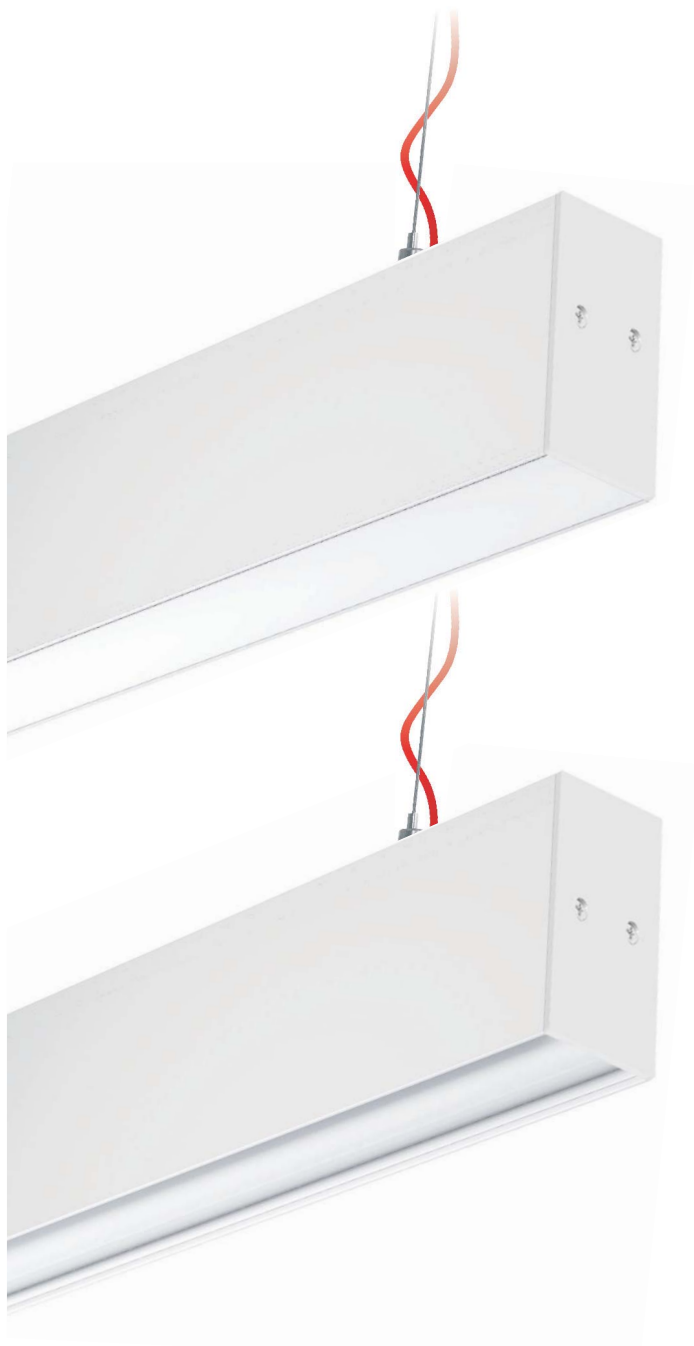


Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT (LINILINE PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) > 80	(15L) 15° Linear lens	(11W053) 11W / 53cm (16W086) 15,7W / 78cm (21W103) 21W / 103cm (26W120) 26,3W / 128cm (32W153) 31,5W / 153cm (42W203) 42W / 203cm	(24) 24VDC	Wire Rope Length (00) 1.5m & 2m cable (10) 3m & 3,5m cable
		(25) 2500K		(30L) 30° Linear lens			
		(27) 2700K		(50L) 50° Linear lens			
		(30) 3000K		(70L) 70° Linear lens			
		(40) 4000K		(90F) 90° Frosted Cover			
		(57) 5700K		(90C) 90° Clear Cover			
				(100M) 100° Milky Cover			
				(14S) 14° Symmetrical lens			
				(27S) 27° Symmetrical lens			
				(49S) 49° Symmetrical lens			
				(40O) 40°x13° Oval lens			

* Tunable white, RGB and RGBW models are available upon request.
 * For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.
 ** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE PD-AN-3080-30L-21W103-24-10

Pendant

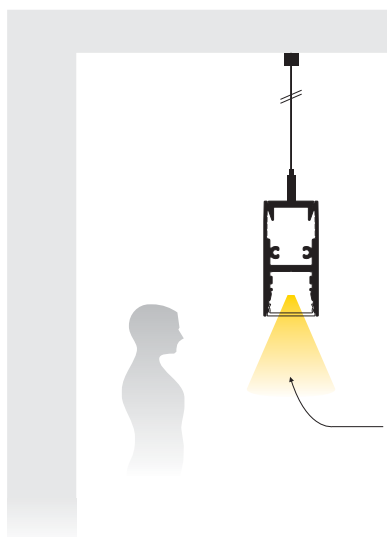

Linear lens 15°, 30°, 50°, 70°
 Milky Cover 100°
 Clear, Frosted Cover 90°
 Symmetrical lens 14°, 27°, 49°
 Oval lens 40°x13°

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version


LINILINE PENDANT ANTIGLARE

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT ANTIGLARE (LINILINE PDAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(11W053) 11W / 53cm	(24) 24VDC	Wire Rope Length (00) 1.5m & 2m cable (10) 3m & 3.5m cable
		(25) 2500K		(30L) 30° Linear lens			
		(27) 2700K		(50L) 50° Linear lens	(16W086) 15,7W / 78cm		
		(30) 3000K		(70L) 70° Linear lens	(21W103) 21W / 103cm		
		(40) 4000K		(80M) 80° Milky Cover	(26W120) 26,3W / 128cm		
		(57) 5700K		(75C) 75° Clear Cover	(32W153) 31,5W / 153cm		
				(75F) 75° Frosted Cover	(42W203) 42W / 203cm		
				(14S) 14° Symmetrical lens			
				(27S) 27° Symmetrical lens			
				(49S) 49° Symmetrical lens			
				(40O) 40°x13° Oval lens			


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE PDAG-AN-3080-30L-21W103-24-10

Pendant Antiglare

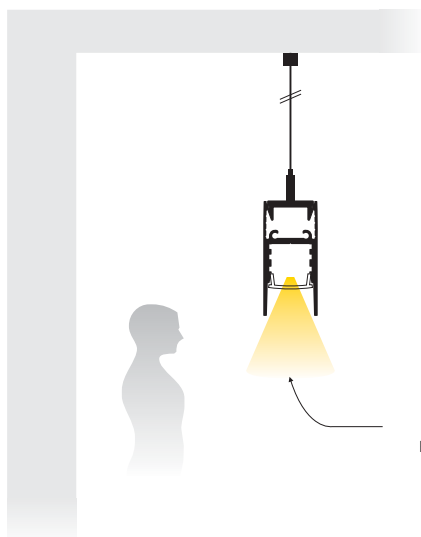

Linear lens 15°, 30°, 50°, 70°
Frosted, Clear Cover 75°
Milky Cover 80°
Symmetrical lens 14°, 27°, 49°
Oval lens 40°x13°

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



LINILINE PENDANT DIRECT/INDIRECT

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

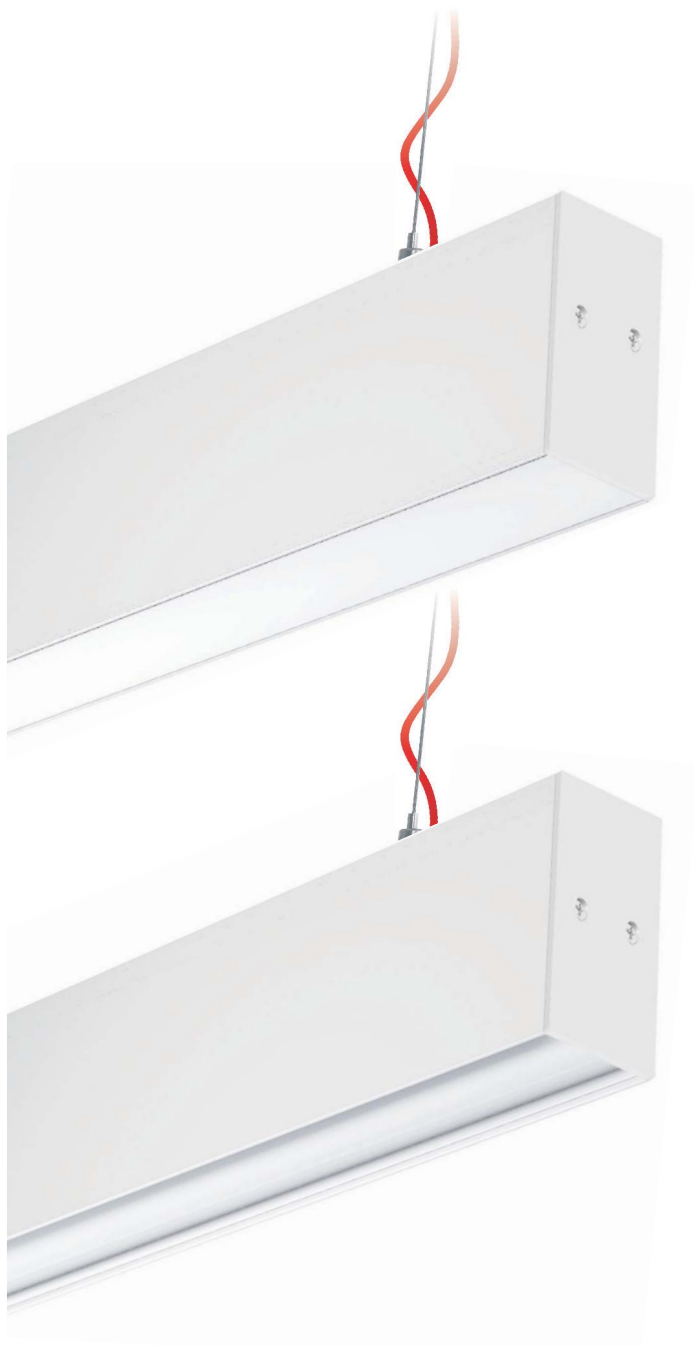

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT DIRECT/INDIRECT (LINILINE PDDI)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	DOWNLIGHT (15L) 15° Linear lens (30L) 30° Linear lens (50L) 50° Linear lens (70L) 70° Linear lens (90F) 90° Frosted Cover (90C) 90° Clear Cover (100M) 100° Milky Cover	(18W053) 17.5W / 53cm (28W086) 28W / 78cm (39W103) 38.5W / 103cm (49W120) 49W / 128cm (60W153) 59.5W / 153cm (81W203) 80.5W / 203cm	[24] 24VDC	Wire Rope Length (0X) 1.5m & 2m cable (1X) 3m & 3,5m cable (XX) Power Supply (X0) for both sides (X1) for Downlight & Uplight separately
		(25) 2500K		(14S) 14° Symmetrical lens (27S) 27° Symmetrical lens (49S) 49° Symmetrical lens (40O) 40°x13° Oval lens			
		(27) 2700K					
		(30) 3000K					
		(40) 4000K					
		(57) 5700K					


* Tunable white, RGB and RGBW models are available upon request (for downlight and/or uplight)

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE PDDI-AN-3080-30L90C-39W103-24-10

Pendant DIRECT/INDIRECT

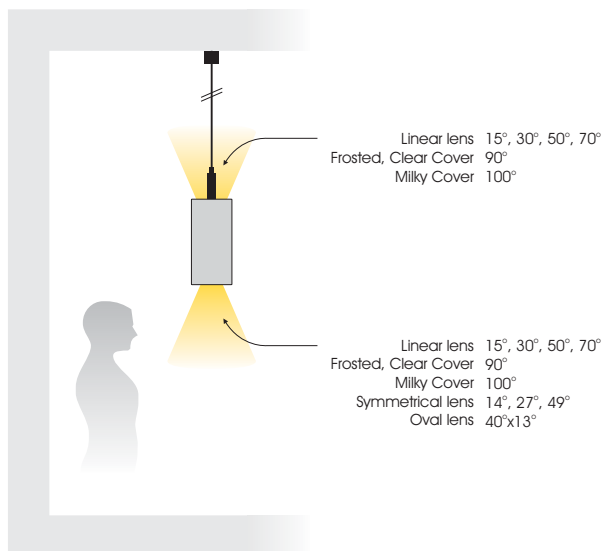

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version


LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE (LINILINE PDDIAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) ≥ 80	DOWNLIGHT			
				(15L) 15° Linear lens			Wire Rope Length
				(30L) 30° Linear lens			(0X) 1.5m & 2m cable
				(50L) 50° Linear lens			(1X) 3m & 3.5m cable
				(70L) 70° Linear lens			(XX)
				(80M) 80° Milky Cover			Power Supply
				(75C) 75° Clear Cover			(X0) for both sides
				(75F) 75° Frosted Cover			(X1) for Downlight & Uplight separately
				(14S) 14° Symmetrical lens	(18W053) 17.5W / 53cm	(24) 24VDC	
				(27S) 27° Symmetrical lens	(28W086) 28W / 78cm		
				(49S) 49° Symmetrical lens	(39W103) 38.5W / 103cm		
				(40C) 40°x13° Oval lens	(49W120) 49W / 128cm		
					(60W153) 59.5W / 153cm		
					(81W203) 80.5W / 203cm		
				UPLIGHT			
				(15L) 15° Linear lens			
				(30L) 30° Linear lens			
				(50L) 50° Linear lens			
				(70L) 70° Linear lens			
				(100M) 100° Milky Cover			
				(90C) 90° Clear Cover			
				(90F) 90° Frosted Cover			


* Tunable white, RGB and RGBW models are available upon request (for downlight and/or uplight)

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE PDDIAG-AN-3080-30L90C-39W103-24-10

Pendant DIRECT/INDIRECT Antiglare

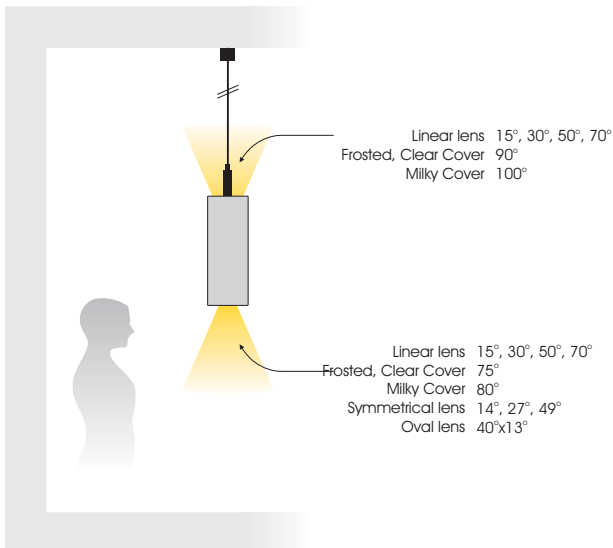

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

LINILINE PENDANT



Square/Rectangle

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

Interior Linear 

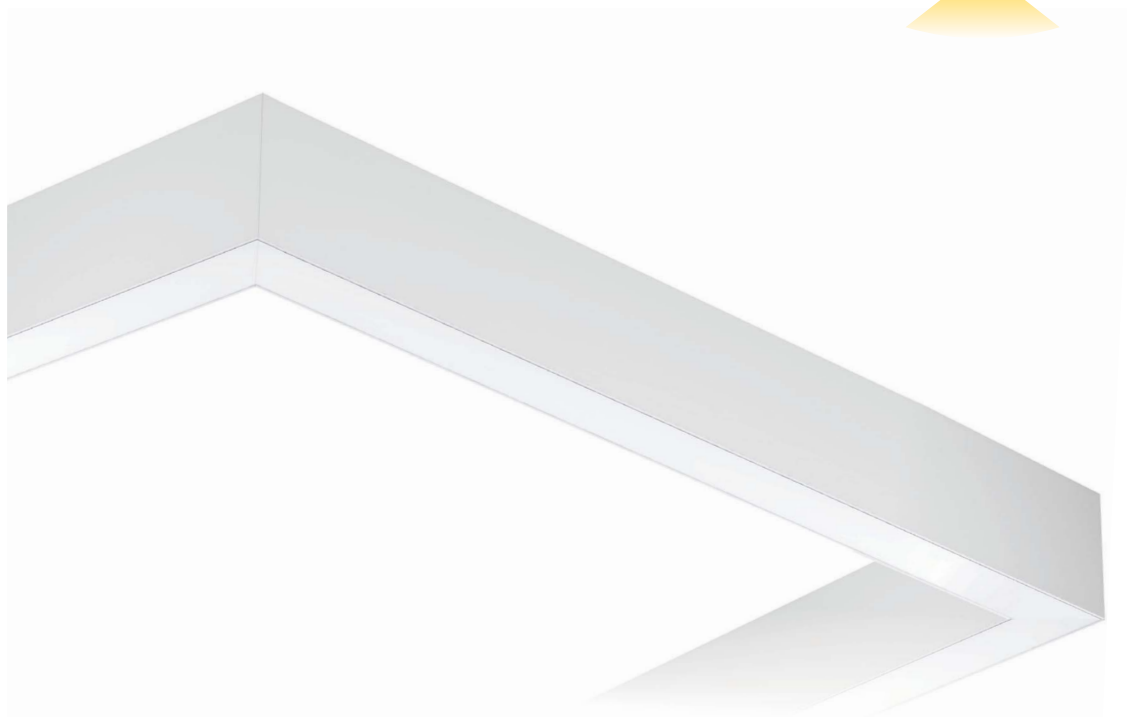

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT SQUARE/RECTANGLE (LINILINE PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) ≥ 80	(15L) 15° Linear lens (30L) 30° Linear lens (50L) 50° Linear lens (70L) 70° Linear lens (90F) 90° Frosted Cover (90C) 90° Clear Cover (100M) 100° Milky Cover	(42W53x53) 42W 53x53cm (53W53x78) 52,5W 53x78cm (63W53x103) 63W 53x103cm (74W53x128) 73,5W 53x128cm (63W78x78) 63W 78x78cm (74W78x103) 73,5W 78x103cm (84W78x128) 84W 78x128cm (84W103x103) 84W 103x103cm (95W103x128) 94,5W 103x128cm (105W128x128) 105W 128x128cm	(24) 24VDC	Wire Rope Length (00) 1,5m & 2m cable (10) 3m & 3,5m cable
				(14S) 14° Symmetrical lens			
				(27S) 27° Symmetrical lens			
				(49S) 49° Symmetrical lens			
				(40O) 40°x13° Oval lens			


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example: LINILINE PD-AN-3080-30L-84W103x103-24-10


Pendant Square/Rectangle

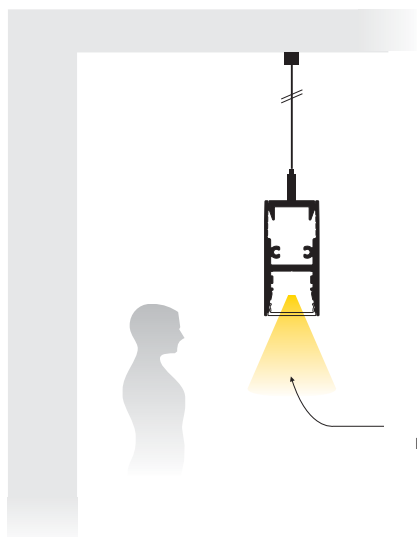

Linear lens 15°, 30°, 50°, 70°
 Frosted, Clear Cover 90°
 Milky Cover 100°
 Symmetrical lens 14°, 27°, 49°
 Oval lens 40°x13°

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

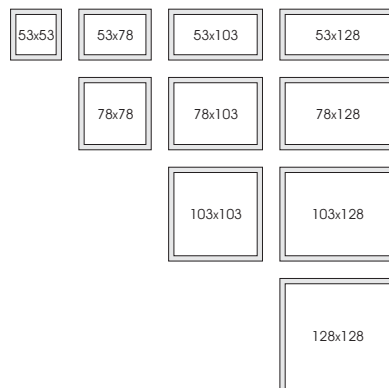

LINILINE PENDANT ANTIGLARE



Square/Rectangle

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

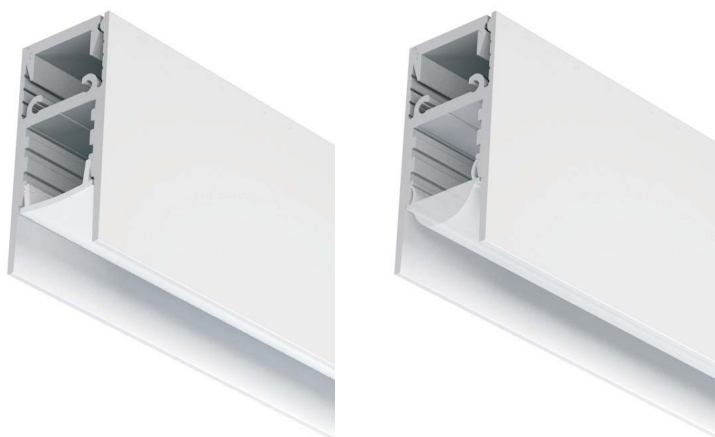

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT SQUARE/ RECTANGLE ANTIGLARE (LINILINE PDAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(15L) 15° Linear lens	(42W53x53) 42W 53x53cm	(24) 24VDC	Wire Rope Length (00) 1,5m & 2m cable (10) 3m & 3,5m cable
		(25) 2500K		(30L) 30° Linear lens	(53W53x78) 52,5W 53x78cm		
		(27) 2700K		(50L) 50° Linear lens	(63W53x103) 63W 53x103cm		
		(30) 3000K		(70L) 70° Linear lens	(74W53x128) 73,5W 53x128cm		
		(40) 4000K		(80M) 80° Milky Cover	(63W78x78) 63W 78x78cm		
		(57) 5700K		(75C) 75° Clear Cover	(74W78x103) 73,5W 78x103cm		
				(75F) 75° Frosted Cover	(84W78x128) 84W 78x128cm		
				(15S) 14° Symmetrical lens	(84W103x103) 84W 103x103cm		
				(27S) 27° Symmetrical lens	(95W103x128) 94,5W 103x128cm		
				(49S) 49° Symmetrical lens			
				(40O) 40°x13° Oval lens	(105W128x128) 105W 128x128cm		


* Tunable white, RGB and RGBW models are available upon request.

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.

Ordering Code Example LINILINE PDAG-AN-3080-30L-84W103x103-24-10


Pendant ANTIGLARE Square/Rectangle

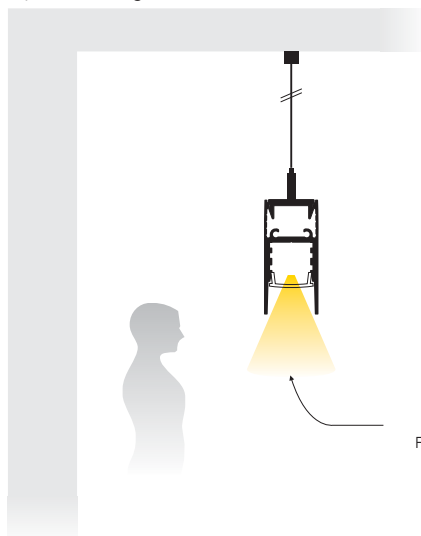

Linear lens 15°, 30°, 50°, 70°
 Frosted, Clear Cover 75°
 Milky Cover 80°
 Symmetrical lens 14°, 27°, 49°
 Oval lens 40°x13°

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

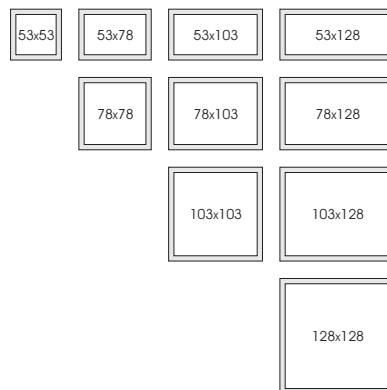

LINILINE PENDANT DIRECT/INDIRECT


Square/Rectangle

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

Interior Linear 



LINILINE PENDANT DIRECT/INDIRECT Square/Rectangle

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT DIRECT/INDIRECT SQUARE/RECTANGLE (LINILINE PDDI)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) ≥ 80	DOWNLIGHT		(24) 24VDC	Wire Rope Length (0X) 1.5m & 2m cable (1X) 3m & 3.5m cable Power Supply (X0) for both sides (X1) for Downlight & Uplight separately
				(15L) 15° Linear lens			
				(30L) 30° Linear lens			
				(50L) 50° Linear lens	(70W53x53) 70W 53x53cm		
				(70L) 70° Linear lens	(91W53x78) 91W 53x78cm		
				(100M) 100° Milky Cover	(112W53x103) 112W 53x103cm		
				(90C) 90° Clear Cover	(133W53x128) 133W 53x128cm		
				(90F) 90° Frosted Cover			
				(14S) 14° Symmetrical lens	(112W78x78) 112W 78x78cm		
				(27S) 27° Symmetrical lens	(133W78x103) 133W 78x103cm		
				(49S) 49° Symmetrical lens	(154W78x128) 154W 78x128cm		
				(40O) 40°x13° Oval lens			
				(XXX) XXX			
				UPLIGHT			
				(15L) 15° Linear lens			
				(30L) 30° Linear lens			
				(50L) 50° Linear lens	(154W103x103) 154W 103x103cm		
				(70L) 70° Linear lens	(175W103x128) 175W 103x128cm		
				(100M) 100° Milky Cover			
				(90C) 90° Clear Cover			
				(90F) 90° Frosted Cover	(196W128x128) 196W 128x128cm		


* Tunable white, RGB and RGBW models are available upon request (for downlight and/or uplight)

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.


Ordering Code Example: LINILINE PDDI-AN-3080-30L90M-154W103x103-24-10

Pendant DIRECT/INDIRECT

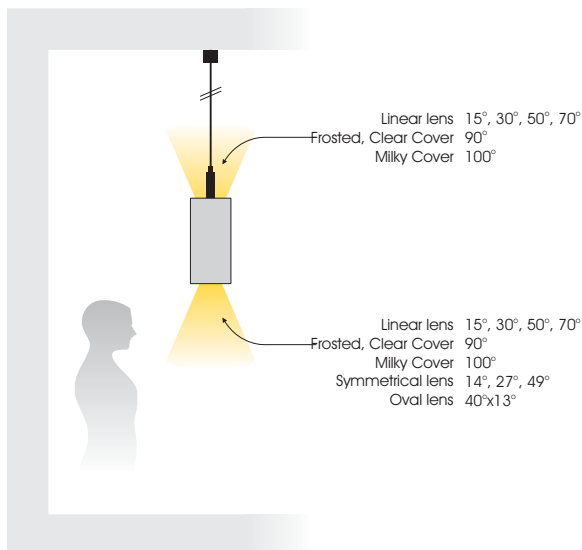

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

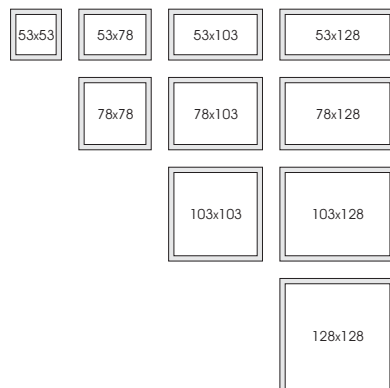



LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE Square/Rectangle

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

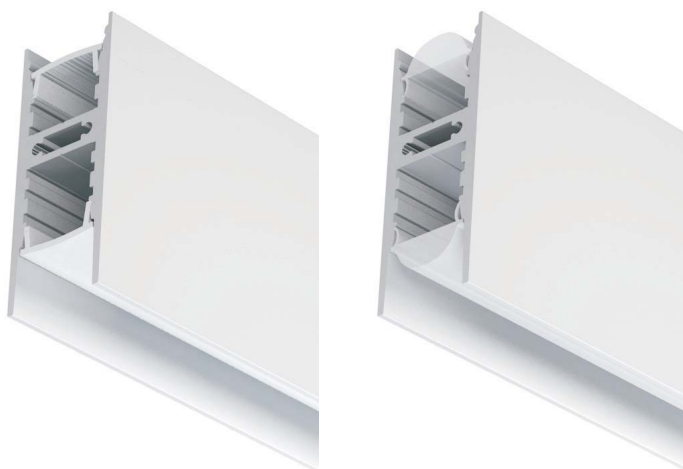

LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE Square/Rectangle

Model	Luminaire Colour	Colour Temperature*	CRI	Beam Angle	Watt / Length **	Voltage	Extras
LINILINE PENDANT DIRECT/INDIRECT SQUARE/RECTANGLE ANTIGLARE (LINILINE PDDIAG)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	DOWNLIGHT (15L) 15° Linear lens (30L) 30° Linear lens (50L) 50° Linear lens (70L) 70° Linear lens (80M) 80° Milky Cover (75C) 75° Clear Cover (75F) 75° Frosted Cover	(70W53x53) 70W 53x53cm (91W53x78) 91W 53x78cm (112W53x103) 112W 53x103cm (133W53x128) 133W 53x128cm (112W78x78) 112W 78x78cm (133W78x103) 133W 78x103cm (154W78x128) 154W 78x128cm (154W103x103) 154W 103x103cm (175W103x128) 175W 103x128cm (196W128x128) 196W 128x128cm	(24) 24VDC	Wire Rope Length (0X) 1.5m & 2m cable (1X) 3m & 3,5m cable (XX) Power Supply (X0) for both sides (X1) for Downlight & Uplight separately
				(14S) 14° Symmetrical lens (27S) 27° Symmetrical lens (49S) 49° Symmetrical lens (40O) 40°x13° Oval lens			
				(XXX)XXX UPLIGHT (15L) 15° Linear lens (30L) 30° Linear lens (50L) 50° Linear lens (70L) 70° Linear lens (100M) 100° Milky Cover (90C) 90° Clear Cover (90F) 90° Frosted Cover			


* Tunable white, RGB and RGBW models are available upon request (for downlight and/or uplight)

* For all Symmetrical and Oval lenses, 2000K and 2500K are NOT available.

** Available in custom lengths, luminaire colours and power upon request.


Ordering Code Example: LINILINE PDDIAG-AN-3080-30L90M-154W103x103-24-10

Pendant DIRECT/INDIRECT ANTIGLARE Square/Rectangle

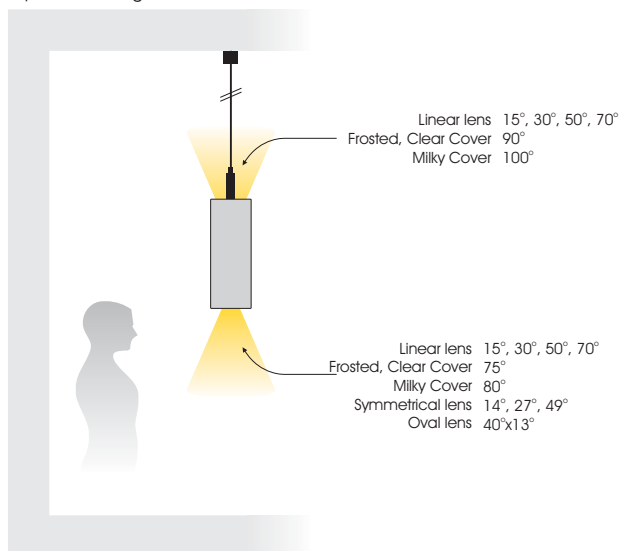

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

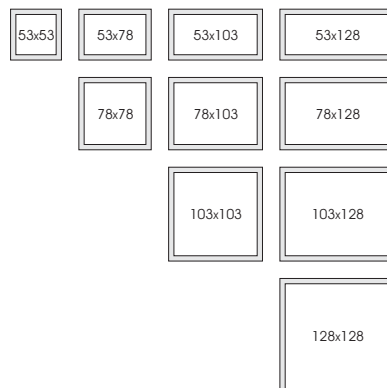



OUTLINER 50

Interior Linear 

- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

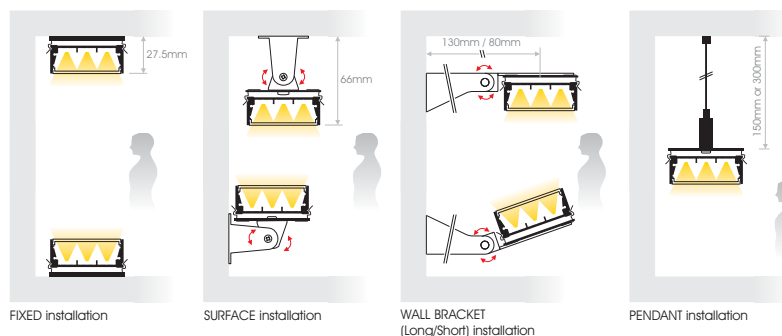

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version





Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 50 FIXED (OUTLINER50-F)						
OUTLINER 50 SURFACE (OUTLINER50-S)						
OUTLINER 50 SHORT BRACKET 8cm (OUTLINER50-B1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	(32W053) 31.5W / 53cm (53W086) 52.5W / 86.3cm (63W103) 63W / 103cm (74W120) 73.5W / 119.7cm (95W153) 94.5W / 153cm (126W203) 126W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 50 LONG BRACKET 13cm (OUTLINER50-B2)						
OUTLINER 50 PENDANT (OUTLINER50 P1) H:150cm (OUTLINER50 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER50-F-AN-4080-53W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 50 FIXED (OUTLINER50-F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(41W053) 40.5W / 53cm (69W089) 69.3W / 88.7cm (81W103) 81W / 103cm (98W124) 98.4W / 124.4cm (122W153) 121.5W / 153cm (162W203) 162W / 203cm		
OUTLINER 50 SURFACE (OUTLINER50-S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(29W053) 29.1W / 53cm (47W083) 46.8W / 83cm (59W103) 58.5W / 103cm (70W123) 70.2W / 123cm (88W153) 87.6W / 153cm (117W203) 117W / 203cm		
OUTLINER 50 SHORT BRACKET 8cm (OUTLINER50-B1)	(AN) Anodized (WH) White (BL) Black	(RGB96) RGB 96LED/m	(35W053) 34.5W / 53cm (60W091) 60.3W / 90.5cm (69W103) 69W / 103cm (82W122) 81.9W / 121.7cm (104W153) 103.5W / 153cm (138W203) 138W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 50 LONG BRACKET 13cm (OUTLINER50-B2)		(RGB60) RGB 60LED/m**	(22W053) 21.6W / 53cm (35W083) 34.8W / 83cm (44W103) 43.5W / 103cm (52W123) 52.2W / 123cm (65W153) 65.1W / 153cm (87W203) 87W / 203cm		
OUTLINER 50 PENDANT (OUTLINER50 P1) H:150cm (OUTLINER50 P2) H:300cm		(RGB30) RGB 30LED/m**	(11W053) 10.8W / 53cm (17W083) 17.1W / 83cm (22W103) 21.6W / 103cm (26W123) 25.8W / 123cm (32W153) 32.4W / 153cm (43W203) 43.2W / 203cm		(12) 12VDC

* Available in other colours upon request
** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER50-F-AN-RGB60-52W123-MP-24



OUTLINER 40

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




FIXED installation

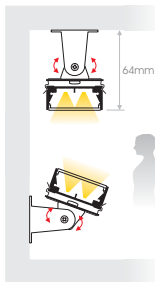

SURFACE installation



WALL BRACKET
(Long/Short) installation



PENDANT installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 40 FIXED (OUTLINER40-F)						
OUTLINER 40 SURFACE (OUTLINER40-S)						
OUTLINER 40 SHORT BRACKET 7.5cm (OUTLINER40-B1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	(21W053) 21W / 53cm (35W086) 35W / 86.3cm (42W103) 42W / 103cm (49W120) 49W / 119.7cm (63W153) 63W / 153cm (84W203) 84W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 40 LONG BRACKET 12.5cm (OUTLINER40-B2)						
OUTLINER 40 PENDANT (OUTLINER40 P1) H:150cm (OUTLINER40 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER40-F-AN-4080-35W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 40 FIXED (OUTLINER40-F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(27W053) 27W / 53cm (46W089) 46.2W / 88.7cm (54W103) 54W / 103cm (66W124) 65.6W / 124.4cm (81W153) 81W / 153cm (108W203) 108W / 203cm		
OUTLINER 40 SURFACE (OUTLINER40-S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(19W053) 19.4W / 53cm (31W083) 31.2W / 83cm (39W103) 39W / 103cm (47W123) 46.8W / 123cm (58W153) 58.4W / 153cm (78W203) 78W / 203cm		
OUTLINER 40 SHORT BRACKET 7.5cm (OUTLINER40-B1)	(AN) Anodized (WH) White (BL) Black	(RGB96) RGB 96LED/m	(23W053) 23W / 53cm (40W091) 40.2W / 90.5cm (46W103) 46W / 103cm (55W122) 54.6W / 121.7cm (69W153) 69W / 153cm (92W203) 92W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 40 LONG BRACKET 12.5cm (OUTLINER40-B2)		(RGB60) RGB 60LED/m**	(14W053) 14.4W / 53cm (23W083) 23.2W / 83cm (29W103) 29W / 103cm (35W123) 34.8W / 123cm (43W153) 43.4W / 153cm (58W203) 58W / 203cm		
OUTLINER 40 PENDANT (OUTLINER40 P1) H:150cm (OUTLINER40 P2) H:300cm		(RGB30) RGB 30LED/m**	(07W053) 7.2W / 53cm (11W083) 11.4W / 83cm (14W103) 14.4W / 103cm (17W123) 17.2W / 123cm (22W153) 21.6W / 153cm (29W203) 28.8W / 203cm		(12) 12VDC

* Available in other colours upon request

** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER40-F-AN-RGB60-35W123-MP-24




OUTLINER 30

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

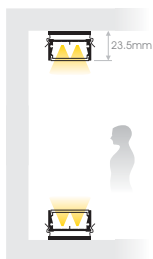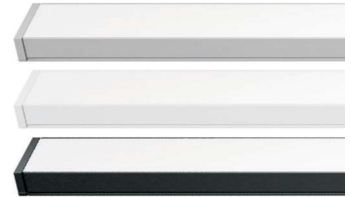


FIXED installation



SURFACE installation

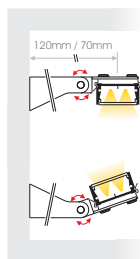

WALL BRACKET
(Long/Short) installation



PENDANT installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 30 FIXED (OUTLINER30-F)						
OUTLINER 30 SURFACE (OUTLINER30-S)						
OUTLINER 30 SHORT BRACKET 7cm (OUTLINER30-B1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	(21W053) 21W / 53cm (35W086) 35W / 86.3cm (42W103) 42W / 103cm (49W120) 49W / 119.7cm (63W153) 63W / 153cm (84W203) 84W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 30 LONG BRACKET 12cm (OUTLINER30-B2)						
OUTLINER 30 PENDANT (OUTLINER30 P1) H:150cm (OUTLINER30 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER30-F-AN-4080-35W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 30 FIXED (OUTLINER30-F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(27W053) 27W / 53cm (46W089) 46.2W / 88.7cm (54W103) 54W / 103cm (66W124) 65.6W / 124.4cm (81W153) 81W / 153cm (108W203) 108W / 203cm		
OUTLINER 30 SURFACE (OUTLINER30-S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(19W053) 19.4W / 53cm (31W083) 31.2W / 83cm (39W103) 39W / 103cm (47W123) 46.8W / 123cm (58W153) 58.4W / 153cm (78W203) 78W / 203cm		
OUTLINER 30 SHORT BRACKET 7cm (OUTLINER30-B1)	(AN) Anodized (WH) White (BL) Black	(RGB96) RGB 96LED/m	(23W053) 23W / 53cm (40W091) 40.2W / 90.5cm (46W103) 46W / 103cm (55W122) 54.6W / 121.7cm (69W153) 69W / 153cm (92W203) 92W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 30 LONG BRACKET 12cm (OUTLINER30-B2)		(RGB60) RGB 60LED/m**	(14W053) 14.4W / 53cm (23W083) 23.2W / 83cm (29W103) 29W / 103cm (35W123) 34.8W / 123cm (43W153) 43.4W / 153cm (58W203) 58W / 203cm		
OUTLINER 30 PENDANT (OUTLINER30 P1) H:150cm (OUTLINER30 P2) H:300cm		(RGB30) RGB 30LED/m**	(07W053) 7.2W / 53cm (11W083) 11.4W / 83cm (14W103) 14.4W / 103cm (17W123) 17.2W / 123cm (22W153) 21.6W / 153cm (29W203) 28.8W / 203cm		(12) 12VDC

* Available in other colours upon request

** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER30-F-AN-RGB60-35W123-MP-24




OUTLINER 20

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50)
- L80/B10 >50.000h (for monochromatic models).
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

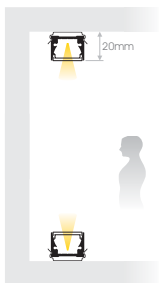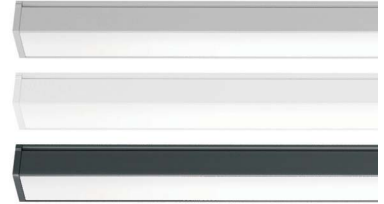


FIXED installation



SURFACE installation



WALL BRACKET
(Long/Short) installation

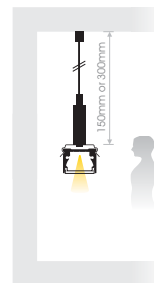

PENDANT installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



ELA.008
Antislipper for
vertical installation
(as extra)



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)



Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
OUTLINER 20 FIXED (OUTLINER20 F)						
OUTLINER 20 SURFACE (OUTLINER20 S)						
OUTLINER 20 SHORT BRACKET 6.5cm (OUTLINER20 B1)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(11W053) 10.5W / 53cm	(TR) Transparent	(24) 24VDC
	(WH) White	(25) 2500K		(18W086) 17.5W / 86.3cm	(MS) Milky Satin	
	(BL) Black	(27) 2700K		(21W103) 21W / 103cm	(MP) Microprismatic	
		(30) 3000K		(25W120) 24.5W / 119.7cm		
		(40) 4000K		(32W153) 31.5W / 153cm		
OUTLINER 20 LONG BRACKET 11.5cm (OUTLINER20 B2)		(57) 5700K		(42W203) 42W / 203cm		
OUTLINER 20 PENDANT (OUTLINER20 P1) H:150cm (OUTLINER20 P2) H:300cm						

* Available in other colours or/and power upon request

Ordering Code Example: OUTLINER20 F-AN-4080-18W086-MS-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
OUTLINER 20 FIXED (OUTLINER20 F)		(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m	(14W053) 13.5W / 53cm (23W089) 23.1W / 88.7cm (27W103) 27W / 103cm (33W124) 32.8W / 124.4cm (41W153) 40.5W / 153cm (54W203) 54W / 203cm		
OUTLINER 20 SURFACE (OUTLINER20 S)		(RGBWW) RGBWW (RGBCW) RGBCW 60LED/m**	(10W053) 9.7W / 53cm (16W083) 15.6W / 83cm (20W103) 19.5W / 103cm (23W123) 23.4W / 123cm (29W153) 29.2W / 153cm (39W203) 39W / 203cm		
OUTLINER 20 SHORT BRACKET 6.5cm (OUTLINER20 B1)	(AN) Anodized	(RGB96) RGB 96LED/m	(12W053) 11.5W / 53cm (20W091) 20.1W / 90.5cm (23W103) 23W / 103cm (27W122) 27.3W / 121.7cm (35W153) 34.5W / 153cm (46W203) 46W / 203cm	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(24) 24VDC
OUTLINER 20 LONG BRACKET 11.5cm (OUTLINER20 B2)	(WH) White (BL) Black				
OUTLINER 20 PENDANT (OUTLINER20 P1) H:150cm (OUTLINER20 P2) H:300cm		(RGB60) RGB 60LED/m**	(07W053) 7.2W / 53cm (12W083) 11.6W / 83cm (15W103) 14.5W / 103cm (17W123) 17.4W / 123cm (22W153) 21.7W / 153cm (29W203) 29W / 203cm		
		(RGB30) RGB 30LED/m**	(04W053) 3.6W / 53cm (06W083) 5.7W / 83cm (07W103) 7.2W / 103cm (09W123) 8.6W / 123cm (11W153) 10.8W / 153cm (14W203) 14.4W / 203cm		(12) 12VDC

* Available in other colours upon request

** The LED density of these ribbons is low thus, the homogeneity of lighting surface of Milky type luminaire will be affected.

Ordering Code Example: OUTLINER20 B2-AN-RGB60-17W123-MP-24

LUMINET




- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Variety of beam angles.
- Multiple mounting options (fixed, surface or pendant).
- 5cm & 10cm bracket accessories for wall installation.
- Ideal for wall washing.
- L80>50.000/B10
- IP40


Lighting management options:
On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



Opal, Frosted, Clear cover



Lens cover




LIGHTSOURCE BY
NICHIA


Model	Luminaire Colour	Colour Temperature	CRI	Beam Angle (Cover Type)	Watt / Length	Voltage
LUMINET FIXED (LUMINET FX)	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) > 80	(15L) 15° (Lens Cover) (30L) 30° (Lens Cover) (50L) 50° (Lens Cover) (70L) 70° (Lens Cover) (90O) 90° (Opal Cover) (90F) 90° (Frosted Cover) (90C) 90° (Clear Cover)	(10W052) 10.5W / 52cm (17W085) 17.5W / 85cm (21W102) 21W / 102cm (24W119) 24.5W / 119cm (31W152) 31.5W / 152cm (42W202) 42W / 202cm	(24) 24VDC
LUMINET PENDANT (LUMINET PD)						
LUMINET SURFACE A (LUMINET SA)						
LUMINET SURFACE B (LUMINET SB)						
LUMINET 5cm BRACKET (LUMINET B1)						
LUMINET 10cm BRACKET (LUMINET B2)						

Ordering Code Example:


LUMINET B1 - WH - 40 - 80 - 30L - 17W085 - 24




LUMINET FIXED




LUMINET PENDANT




LUMINET SURFACE A



LUMINET SURFACE B




LUMINET 5cm BRACKET



LUMINET 10cm BRACKET

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version





LIGUA 1



- LIGUA 1 luminaire is ideal for linear LED lighting applications, possible to create in custom lengths.
- Possibility of creating 90° vertical or 90° horizontal installations.
- Special design and construction to meet the most demanding lighting designs.
- Available in different colours: Anodized, White, Black, Oak, and Walnut.
- L90/B10 50.000h
- IP30


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA


Model	Luminaire Colour	Colour Temperature	Colour Rendering*	Type	Watt / Length	Voltage
LIGUA 1 (LIGUA 1)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(CL) Clear (OP) Opal (FR) Frosted	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	




*Available also in CRI90 upon request

Ordering Code Example:

LIGUA 1 - WH - 40 - 80 - FR - 31W152

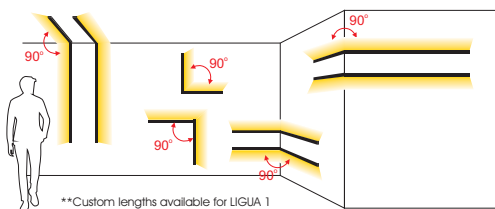


**Custom lengths available for LIGUA 1 for 90° vertical or 90° horizontal installations



Available upon request:

- ✓ Custom dimensions**
- ✓ Custom luminaire colours
- ✓ Emergency version

Luminaire colours



- LIGUA 2 luminaire is ideal for linear LED lighting applications, possible to create in custom lengths.
- Possibility of creating 90° vertical or 90° horizontal installations.
- Special design and construction to meet the most demanding lighting designs.
- Available in different colours: Anodized, White, Black, Oak, and Walnut.
- L90/B10 50.000h
- IP30


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA


Model	Luminaire Colour	Colour Temperature	Colour Rendering*	Type	Watt / Length	Voltage
LIGUA 2 (LIGUA 2)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(CL) Clear (OP) Opal (FR) Frosted	(14W035) 14W / 35cm	24VDC (24)
		(25) 2500K			(24W060) 24.4W / 60cm	
		(27) 2700K			(38W093) 38.5W / 93cm	
		(30) 3000K			(42W102) 42W / 102cm	
		(40) 4000K			(49W119) 49W / 119cm	
		(57) 5700K			(63W152) 63W / 152cm	
					(84W202) 84W / 202cm	



*Available also in CRI90 upon request

Ordering Code Example:

LIGUA 2 - WH - 40 - 80 - FR - 38W093

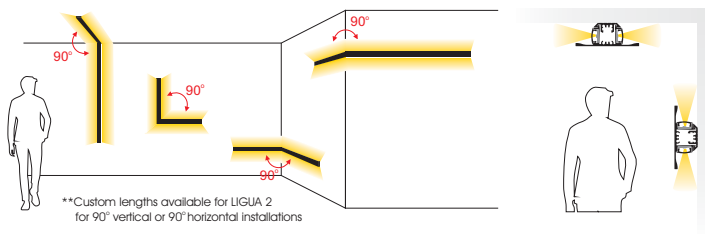

Available upon request:

- ✓ Custom dimensions**
- ✓ Custom luminaire colours
- ✓ Emergency version

Luminaire colours





ELECSIA

Interior Linear 


- Ensures uniformity and colour consistency of the lighting output.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options (fixed, surface or pendant).
- Long & Short bracket accessory for wall installation.
- L80/B10 >50.000h (for monochromatic models)
- IP40

Lighting management options:


On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON




FIXED Installation




SURFACE A Installation




SURFACE B Installation



SURFACE C Installation



WALL BRACKET
(Long/Short) Installation



PENDANT Installation

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



ELA.008
Antislipper for
vertical installation
(as extra)



Input cable
with IP connectors
(as extra)



Input & Output cables
with IP connector
(as extra)

Model	Luminaire Colour*	Colour Temperature	CRI	Watt* / Length	Type	Voltage
ELECSIA FIXED (ELECSIA F) ELECSIA SURFACE A (ELECSIA SA) ELECSIA SURFACE B (ELECSIA SB) ELECSIA SURFACE C (ELECSIA SC) ELECSIA SHORT BRACKET 6.5cm (ELECSIA B1) ELECSIA LONG BRACKET 11.5cm (ELECSIA B2) ELECSIA PENDANT (ELECSIA P1) H:150cm (ELECSIA P2) H:300cm	(AN) Anodized (WH) White (BL) Black	(20) 2000K (25) 2500K (27) 2700K (30) 3000K (40) 4000K (57) 5700K	(80) ≥ 80	(11W052) 10.5W / 52cm (18W085) 17.5W / 85.3cm (21W102) 21W / 102cm (25W119) 24.5W / 118.7cm (32W152) 31.5W / 152cm (42W202) 42W / 202cm	(TR) Transparent (FR) Frosted (MS) Milky Satin	(24) 24VDC

* Available in other colours or/and power upon request

Ordering Code Example: ELECSIA B1-BL-4080-32W152-TR-24

RGBWW / RGBCW / RGB

Model	Luminaire Colour*	Colour	Watt / Length	Type	Voltage
ELECSIA FIXED (ELECSIA F) ELECSIA SURFACE A (ELECSIA SA) ELECSIA SURFACE B (ELECSIA SB) ELECSIA SURFACE C (ELECSIA SC) ELECSIA SHORT BRACKET 6.5cm (ELECSIA B1) ELECSIA LONG BRACKET 11.5cm (ELECSIA B2) ELECSIA PENDANT (ELECSIA P1) H:150cm (ELECSIA P2) H:300cm	(AN) Anodized (WH) White (BL) Black	(RGBWW) RGBWW (RGBCW) RGBCW 84LED/m (RGBWW) RGBWW (RGBCW) RGBCW 60LED/m (RGB96) RGB 96LED/m (RGB60) RGB 60LED/m (RGB30) RGB 30LED/m	(14W052) 13.5W / 52cm (23W088) 23.1W / 87.7cm (27W102) 27W / 102cm (33W123) 32.8W / 123.4cm (41W152) 40.5W / 152cm (54W202) 54W / 202cm (10W052) 9.7W / 52cm (16W082) 15.6W / 82cm (20W102) 19.5W / 102cm (23W122) 23.4W / 122cm (29W152) 29.2W / 152cm (39W202) 39W / 202cm (12W052) 11.5W / 52cm (20W090) 20.1W / 89.5cm (23W102) 23W / 102cm (27W121) 27.3W / 120.7cm (35W152) 34.5W / 152cm (46W202) 46W / 202cm (07W052) 7.2W / 52cm (12W082) 11.6W / 82cm (15W102) 14.5W / 102cm (17W122) 17.4W / 122cm (22W152) 21.7W / 152cm (29W202) 29W / 202cm (04W052) 3.6W / 52cm (06W082) 5.7W / 82cm (07W102) 7.2W / 102cm (09W122) 8.6W / 122cm (11W152) 10.8W / 152cm (14W202) 14.4W / 202cm	(TR) Transparent (FR) Frosted (MS) Milky Satin	(24) 24VDC (12) 12VDC


* Available in other colours upon request

Ordering Code Example: ELECSIA B1-BL-RGB60-22W152-TR-24

PALMA LINEAR TUNABLE





- Surface, Trimless or Pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- DALI dimmable upon request.
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- Low UGR with microprismatic cover.

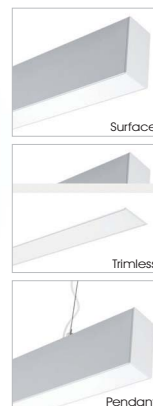


Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length / Initial LED Lumen (no cover)	Voltage
PALMA TUNABLE SURFACE (PALMA TS)	(AN) Anodized (WH) White (BL) Black	(AD) 3000-6000K Adjustable	(80) ≥ 80	(TR) Transparent	(20W086) 20W / 86cm / 2100lm (26W114) 26W / 114cm / 2650lm	(230) 230VAC DALI DIMMABLE
PALMA TUNABLE TRIMLESS (PALMA TR)				(MS) Milky Satin	(32W142) 32W / 142cm / 3350lm (40W086) 40W / 86cm / 4300lm (52W114) 52W / 114cm / 5700lm	
PALMA TUNABLE PENDANT (PALMA TP)				(MP) Microprismatic	(62W142) 62W / 142cm / 7150lm	




Ordering Code Example:
PALMA TR - AN - AD - 80 - MS - 52W114 - 230



- Surface, Trimless or Pendant.
- DALI dimmable upon request.
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- Low UGR with microprismatic cover.

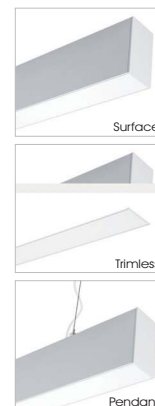


Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
PALMA MONOCHROMATIC SURFACE (PALMA SF)			(TR) Transparent		(30) 3000K	{ 16W057 16W / 57cm / 2060lm 24W085 24W / 85cm / 3090lm 32W113 32W / 113cm / 4120lm 40W141 40W / 141cm / 5150lm 48W169 48W / 169cm / 6180lm 56W197 56W / 197cm / 7210lm }
PALMA MONOCHROMATIC TRIMLESS (PALMA TR)	(AN) Anodized (WH) White (BL) Black	(80) ≥ 80	(MS) Milky Satin (MP) Microprismatic	(230) 230VAC		{ 16W057 16W / 57cm / 2240lm 24W085 24W / 85cm / 3360lm 32W113 32W / 113cm / 4480lm 40W141 40W / 141cm / 5600lm 48W169 48W / 169cm / 6720lm 56W197 56W / 197cm / 7840lm }
PALMA MONOCHROMATIC PENDANT (PALMA PD)					(40) 4000K	{ 16W057 16W / 57cm / 2240lm 24W085 24W / 85cm / 3360lm 32W113 32W / 113cm / 4480lm 40W141 40W / 141cm / 5600lm 48W169 48W / 169cm / 6720lm 56W197 56W / 197cm / 7840lm }



*Available in 2700K, 3500K and 6500K upon request.
 **Available in 230VAC DALI dimmable upon request.


Ordering Code Example:
 PALMA PD - AN - 80 - TR - 230 - 40 - 32W113





PALMA 230V EMERGENCY

Interior Linear 

- 3 hours EMERGENCY operation
- Surface, Trimless or Pendant.
- DALI dimmable upon request (except 32W113 model).
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- Low UGR with microprismatic cover.

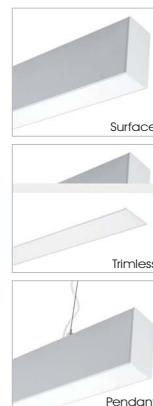


Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
PALMA EM MONOCHROMATIC SURFACE (PALMA EM SF)			(TR) Transparent		(30) 3000K	(32W113) 32W / 113cm / 4120lm (40W141) 40W / 141cm / 5150lm (48W169) 48W / 169cm / 6180lm (56W197) 56W / 197cm / 7210lm
PALMA EM MONOCHROMATIC TRIMLESS (PALMA EM TR)	(AN) Anodized	(80) ≥ 80	(MS) Milky Satin	(230) 230VAC		
	(WH) White					
	(BL) Black		(MP) Microprismatic		(40) 4000K	(32W113) 32W / 113cm / 4480lm (40W141) 40W / 141cm / 5600lm (48W169) 48W / 169cm / 6720lm (56W197) 56W / 197cm / 7840lm
PALMA EM MONOCHROMATIC PENDANT (PALMA EM PD)						



*Available in 2700K, 3500K and 6500K upon request.

Ordering Code Example:

PALMA EM PD - AN - 80 - TR - 230 - 40 - 32W113








TETRA PLUS TUNABLE



- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- Low tolerances for colour temperature (MacAdam 4).
- Lumen maintenance L80/B50 50.000h
- IP30

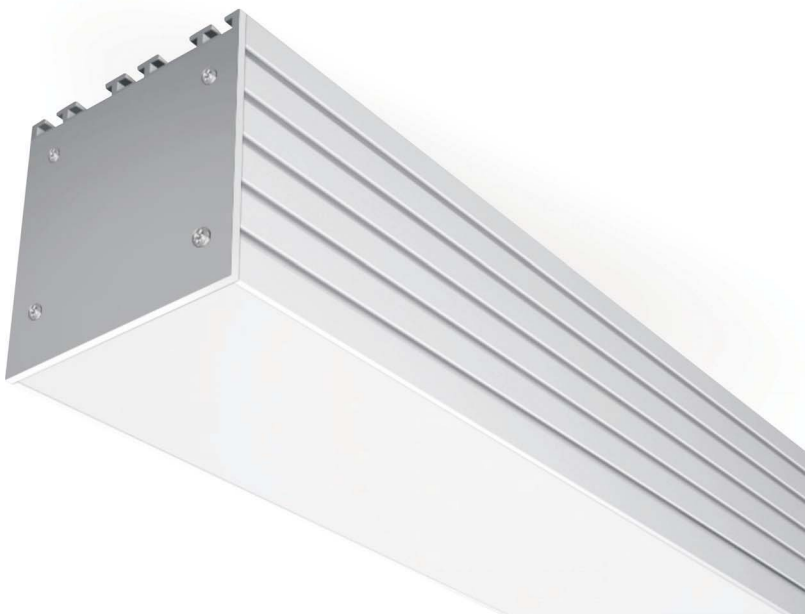


Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length / Lumen	Initial LED Lumen (no cover)	Voltage
TETRA PLUS TUNABLE SURFACE (TETRA PLUS TS)							
TETRA PLUS TUNABLE SURFACE with HINGE (TETRA PLUS TH)					(20W086) 20W / 86cm / 2100lm (26W114) 26W / 114cm / 2650lm (32W142) 32W / 142cm / 3350lm		
TETRA PLUS TUNABLE RECESSED (TETRA PLUS TR)	(AN) Anodized (WH) White (BL) Black	(AD) 3000-6000K Adjustable	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(40W086) 40W / 86cm / 4300lm (52W114) 52W / 114cm / 5700lm (62W142) 62W / 142cm / 7150lm		(230) 230VAC DALI DIMMABLE
TETRA PLUS TUNABLE TRIMLESS (TETRA PLUS TT)							
TETRA PLUS TUNABLE PENDANT (TETRA PLUS TP)							





Ordering Code Example:

TETRA PLUS TR - AN - AD - 80 - MS - 40W086 - 230

- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- Linear Tunable White system with adjustable colour temperature from 3,000 to 6,000 K at constant luminous flux.
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- 3 hours EMERGENCY operation
- IP30

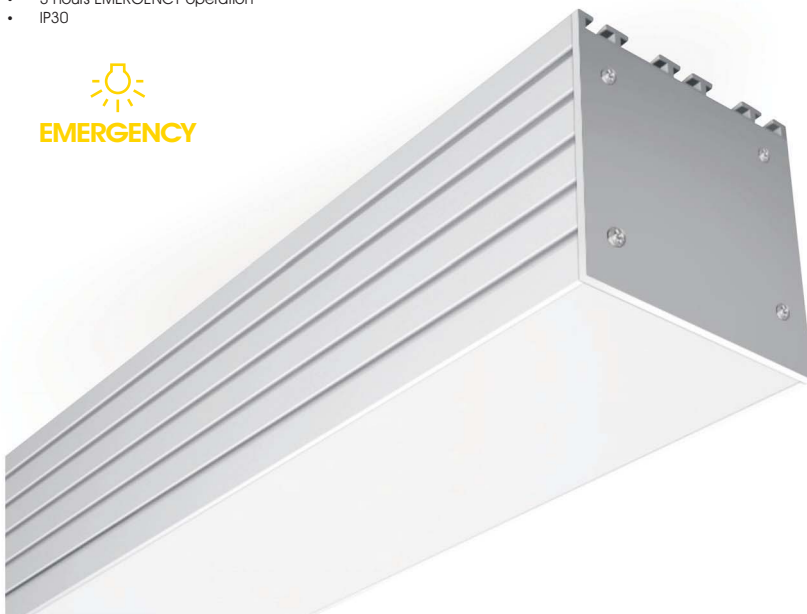

Model	Luminaire Colour	Colour Temperature	CRI	Type	Watt / Length / Initial LED Lumen (no cover)	Voltage
TETRA PLUS TUNABLE EM SURFACE (TETRA PLUS EM TS)						
TETRA PLUS TUNABLE EM SURFACE with HINGE (TETRA PLUS EM TH)						
TETRA PLUS TUNABLE EM RECESSED (TETRA PLUS EM TR)	(AN) Anodized (WH) White (BL) Black	(AD) 3000-6000K Adjustable	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(32W/142) 32W / 142cm / 3350lm (62W/142) 62W / 142cm / 7150lm	(230) 230VAC DALI DIMMABLE
TETRA PLUS TUNABLE EM TRIMLESS (TETRA PLUS EM TT)						
TETRA PLUS TUNABLE EM PENDANT (TETRA PLUS EM TP)						




Ordering Code Example:

TETRA PLUS EM TR - AN - AD - 80 - MS - 62W/142 - 230



TETRA PLUS






- Linear LED lighting surface, with hinge, recessed, trimless or pendant.
- IP30

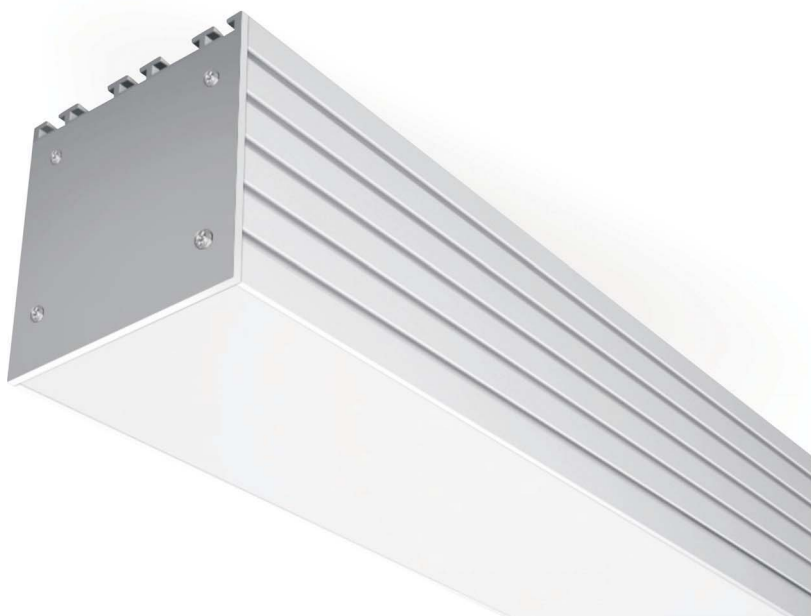

TETRA PLUS TRIMLESS
PENDANT / SURFACE



TETRA PLUS
RECESSED



578 x 81mm
858 x 81mm
1138 x 81mm
1418 x 81mm
1698 x 81mm
1978 x 81mm

Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
TETRA PLUS SURFACE <i>(TETRA PLUS SF)</i>	<i>(AN)</i> Anodized <i>(WH)</i> White <i>(BL)</i> Black	<i>(80)</i> ≥ 80	<i>(TR)</i> Transparent <i>(MS)</i> Milky Satin	<i>(230)</i> 230VAC	<i>(30)</i> 3000K	<i>(16W057)</i> 16W / 57cm / 2060lm
TETRA PLUS SURFACE with HINGE <i>(TETRA PLUS SH)</i>						<i>(24W085)</i> 24W / 85cm / 3090lm
						<i>(32W113)</i> 32W / 113cm / 4120lm
						<i>(40W141)</i> 40W / 141cm / 5150lm
						<i>(48W169)</i> 48W / 169cm / 6180lm
						<i>(56W197)</i> 56W / 197cm / 7210lm
TETRA PLUS RECESSED <i>(TETRA PLUS RC)</i>	<i>(40)</i> 4000K	<i>(16W057)</i> 16W / 57cm / 2240lm				
TETRA PLUS TRIMLESS <i>(TETRA PLUS TR)</i>		<i>(24W085)</i> 24W / 85cm / 3360lm				
		<i>(32W113)</i> 32W / 113cm / 4480lm				
		<i>(40W141)</i> 40W / 141cm / 5600lm				
TETRA PLUS PENDANT <i>(TETRA PLUS PD)</i>	<i>(48W169)</i> 48W / 169cm / 6720lm					
	<i>(56W197)</i> 56W / 197cm / 7840lm					

*Available in 2700K, 3500K and 6500K upon request.

**Available in 230VAC DALI dimmable upon request.


Ordering Code Example:

TETRA PLUS RC - AN - 80 - TR - 230 - 40 - 32W113



Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




- 3 hours EMERGENCY operation
- Surface, Recessed, Trimless or Pendant.
- DALI dimmable upon request (except 32W113 model).
- Low tolerances for colour temperature (MacAdam 4)
- Lumen maintenance L80/B50 50.000h
- IP30

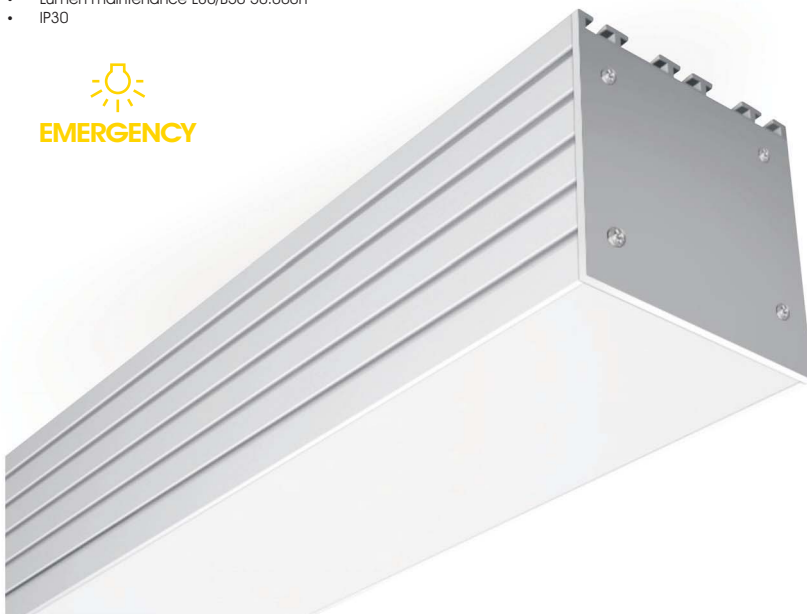

TETRA PLUS EM TRIMLESS
PENTAND / SURFACE



TETRA PLUS EM
RECESSED



1138 x 81mm
1418 x 81mm
1698 x 81mm
1978 x 81mm

Model	Luminaire Colour	CRI	Type	Voltage	Colour Temperature*	Watt / Length / Initial LED Lumen (no cover)
TETRA PLUS EM SURFACE (TETRA PLUS EM SF)						
TETRA PLUS EM SURFACE with HINGE (TETRA PLUS EM SH)						
TETRA PLUS EM RECESSED (TETRA PLUS EM RC)	(AN) Anodized (WH) White (BL) Black	(80) ≥ 80	(TR) Transparent (MS) Milky Satin	(230) 230VAC	(30) 3000K	32W113 32W / 113cm / 4120lm 40W141 40W / 141cm / 5150lm 48W169 48W / 169cm / 6180lm 56W197 56W / 197cm / 7210lm
TETRA PLUS EM TRIMLESS (TETRA PLUS EM TR)					(40) 4000K	32W113 32W / 113cm / 4480lm 40W141 40W / 141cm / 5600lm 48W169 48W / 169cm / 6720lm 56W197 56W / 197cm / 7840lm

*Available in 2700K, 3500K and 6500K upon request.

Ordering Code Example:

TETRA PLUS EM RC - AN - 80 - TR - 230 - 40 - 40W141

TETRA WASH ANTI-GLARE

Interior Linear 

- Linear LED lighting recessed and anti-glare.
- IP30



CREE LEDs





Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	LED wattage / Length	Voltage
TETRA WASH ANTI-GLARE (TETRA WASH AG)	(BL) Black	(27) 2700K	(70) ≥ 70 (80) ≥ 80*	(46) 46°	(03W032) 3W / 32cm	(24) 24VDC
		(30) 3000K		(25) 25°	(06W032) 6W / 32cm	
		(40) 4000K		(12) 12°	(05W052) 5W / 52cm	
		(56) 5600K			(10W052) 10W / 52cm	
					(12W052) 12W / 52cm	
					(10W102) 10W / 102cm	
					(20W102) 20W / 102cm	
					(24W102) 24W / 102cm	
					(15W152) 15W / 152cm	
					(30W152) 30W / 152cm	
					(36W152) 36W / 152cm	
					(20W202) 20W / 202cm	
					(40W202) 40W / 202cm	
					(48W202) 48W / 202cm	

* CRI 80 only for 2700K/3000K/4000K

Ordering Code Example:

TETRA WASH AG - BL - 27 - 80 - 12 - 20W202 - 24




30.2x4.3cm
50.2x4.3cm
100.2x4.3cm
150.2x4.3cm
200.2x4.3cm

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- Linear LED lighting with CREE LEDs.
- Available in different CCT.
- Available in recessed, trimless, surface, wall adjustable or pendant application.
- IP30

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth





CREE
LEDs

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
-------	------------------	--------------------	------------------	------------	------------	--------	---------



TETRA WASH SURFACE A (TETRA WASH SA)	(AN) Anodized (WH) White (BL) Black	(27) 2700K (30) 3000K (40) 4000K (56) 5600K*	(70) ≥ 70* (80) ≥ 80**	(12) 12° (25) 25° (46) 46° (40) 40°x10°	(1010) 10.5W-10LED/m (2010) 21W-10LED/m (2020) 21W-20LED/m	(032) 32cm (052) 52cm (062) 62cm (082) 82cm (092) 92cm (102) 102cm (112) 112cm (122) 122cm (132) 132cm (142) 142cm (152) 152cm (162) 162cm (172) 172cm (182) 182cm (192) 192cm (202) 202cm	(24) 24VDC
						(2424) 25.2W-24LED/m (052) 52cm (102) 102cm (152) 152cm (202) 202cm	





TETRA WASH SURFACE A



TETRA WASH SURFACE B



TETRA WASH SURFACE C



* 5600K only available in CRI 70
** CRI 80 only for 2700K/3000K/4000K

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Ordering Code Example:

TETRA WASH SC - WH - 30 - 80 - 46 - 2424 - 102 - 24

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
TETRA WASH RECESSED (TETRA WASH RC)	(AN) Anodized (WH) White (BL) Black	(27) 2700K (30) 3000K (40) 4000K (56) 5600K*	(70) ≥ 70* (80) ≥ 80**	(12) 12° (25) 25° (46) 46° (40) 40°x10°	(1010) 10.5W-10LED/m (2010) 21W-10LED/m (2020) 21W-20LED/m	(034) 34cm (054) 54cm (064) 64cm (084) 84cm (094) 94cm (104) 104cm (114) 114cm (124) 124cm (134) 134cm (144) 144cm (154) 154cm (164) 164cm (174) 174cm (184) 184cm (194) 194cm (204) 204cm	(24) 24VDC
					(2424) 25.2W-24LED/m	(054) 54cm (104) 104cm (154) 154cm (204) 204cm	




TETRA WASH RECESSED





32.2x4.3cm
52.2x4.3cm
62.2x4.3cm
82.2x4.3cm
92.2x4.3cm
102.2x4.3cm
112.2x4.3cm
122.2x4.3cm
132.2x4.3cm
142.2x4.3cm
152.2x4.3cm
162.2x4.3cm
172.2x4.3cm
182.2x4.3cm
192.2x4.3cm
202.2x4.3cm

* 5600K only available in CRI 70
** CRI 80 only for 2700K/3000K/4000K

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
TETRA WASH TRIMLESS (TETRA WASH TR)	(AN) Anodized (WH) White (BL) Black	(27) 2700K (30) 3000K (40) 4000K (56) 5600K*	(70) ≥ 70* (80) ≥ 80**	(12) 12° (25) 25° (46) 46° (40) 40°x10°	(1010) 10.5W-10LED/m (2010) 21W-10LED/m (2020) 21W-20LED/m	(032) 32cm (052) 52cm (062) 62cm (082) 82cm (092) 92cm (102) 102cm (112) 112cm (122) 122cm (132) 132cm (142) 142cm (152) 152cm (162) 162cm (172) 172cm (182) 182cm (192) 192cm (202) 202cm	(24) 24VDC
					(2424) 25.2W-24LED/m	(052) 52cm (102) 102cm (152) 152cm (202) 202cm	



TETRA WASH TRIMLESS




* 5600K only available in CRI 70
** CRI 80 only for 2700K/3000K/4000K

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
TETRA WASH WALL ADJUSTABLE (TETRA WASH WA)	(AN) Anodized (WH) White (BL) Black	(27) 2700K	(70) ≥ 70* (80) ≥ 80**	(12) 12°	(1010) 10.5W-10LED/m (2010) 21W-10LED/m (2020) 21W-20LED/m	(032) 32cm	(24) 24VDC
		(30) 3000K		(25) 25°		(052) 52cm	
		(40) 4000K		(46) 46°		(062) 62cm	
		(56) 5600K*		(40) 40°x10°		(082) 82cm	
						(092) 92cm	
						(102) 102cm	
						(112) 112cm	
						(122) 122cm	
						(132) 132cm	
						(142) 142cm	
					(2424) 25.2W-24LED/m	(152) 152cm	
						(162) 162cm	
						(172) 172cm	
						(182) 182cm	
						(192) 192cm	
						(202) 202cm	
						(052) 52cm	
						(102) 102cm	
						(152) 152cm	
						(202) 202cm	

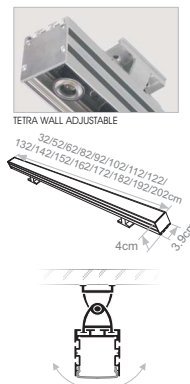

* 5600K only available in CRI 70
 ** CRI 80 only for 2700K/3000K/4000K

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt-LED/m	Length	Voltage
TETRA WASH PENDANT (TETRA WASH PD)	(AN) Anodized (WH) White (BL) Black	(27) 2700K	(70) ≥ 70* (80) ≥ 80**	(12) 12°	(1010) 10.5W-10LED/m (2010) 21W-10LED/m (2020) 21W-20LED/m	(032) 32cm	(24) 24VDC
		(30) 3000K		(25) 25°		(052) 52cm	
		(40) 4000K		(46) 46°		(062) 62cm	
		(56) 5600K*		(40) 40°x10°		(082) 82cm	
						(092) 92cm	
						(102) 102cm	
						(112) 112cm	
						(122) 122cm	
						(132) 132cm	
						(142) 142cm	
					(2424) 25.2W-24LED/m	(152) 152cm	
						(162) 162cm	
						(172) 172cm	
						(182) 182cm	
						(192) 192cm	
						(202) 202cm	
						(052) 52cm	
						(102) 102cm	
						(152) 152cm	
						(202) 202cm	

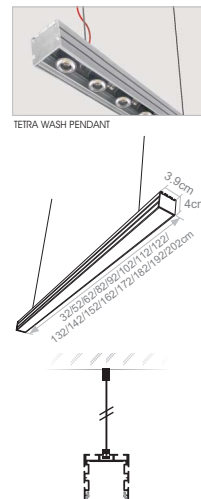

* 5600K only available in CRI 70
 ** CRI 80 only for 2700K/3000K/4000K

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



TETRA RECESSED/TRIMLESS



- Linear LED lighting with transparent or milky cover.
- Available in recessed or trimless application.
- Available in different CCT to meet all the architectural needs.
- L90/B10 50.000h
- IP30
- Low UGR with microprismatic cover.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth





TETRA RECESSED



TETRA TRIMLESS

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
TETRA RECESSED (TETRA RC)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(12W062) 12.2W / 62cm	24VDC (24)
		(25) 2500K			(24W062) 24.4W / 62cm	
		(27) 2700K			(19W095) 19.2W / 95cm	
		(30) 3000K			(38W095) 38.5W / 95cm	
		(40) 4000K			(21W104) 21W / 104cm	
		(57) 5700K			(42W104) 42W / 104cm	
					(24W121) 24.5W / 121cm	
					(49W121) 49W / 121cm	
					(31W154) 31.5W / 154cm	
					(63W154) 63W / 154cm	
					(42W204) 42W / 204cm	
					(84W204) 84W / 204cm	
TETRA TRIMLESS (TETRA TR)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(12W060) 12.2W / 60cm	24VDC (24)
		(25) 2500K			(24W060) 24.5W / 60cm	
		(27) 2700K			(19W093) 19.25W / 93cm	
		(30) 3000K			(38W093) 38.5W / 93cm	
		(40) 4000K			(21W102) 21W / 102cm	
		(57) 5700K			(42W102) 42W / 102cm	
					(24W119) 24.5W / 119cm	
					(49W119) 49W / 119cm	
					(31W152) 31.5W / 152cm	
					(63W152) 63W / 152cm	
					(42W202) 42W / 202cm	
					(84W202) 84W / 202cm	



Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

Ordering Code Example:

TETRA RC - WH - 30 - 80 - MS - 49W121 - 24

- Linear LED lighting with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- Semi recessed effect.
- L90/B10 50.000h
- IP30
- Low UGR with micropismatic cover.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA


Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
TETRA SEMI RECESSED (TETRA SR)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent	(12W062) 12.2W / 62cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(24W062) 24.4W / 62cm	
		(27) 2700K		(MP) Micropismatic	(19W095) 19.2W / 95cm	
		(30) 3000K			(38W095) 38.5W / 95cm	
		(40) 4000K			(21W104) 21W / 104cm	
		(57) 5700K			(42W104) 42W / 104cm	
					(24W121) 24.5W / 121cm	
					(49W121) 49W / 121cm	
					(31W154) 31.5W / 154cm	
					(63W154) 63W / 154cm	
					(42W204) 42W / 204cm	
					(84W204) 84W / 204cm	

Ordering Code Example:

TETRA SR - AN - 30 - 80 - MS - 21W104 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

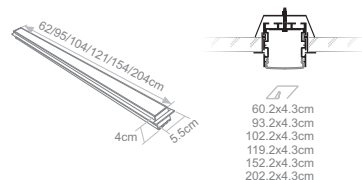

TETRA SURFACE



- Linear LED lighting with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- Available in 3 different types.
- L90/B10 50.000h
- IP30
- Low UGR with microprismatic cover.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



TETRA SURFACE A




TETRA SURFACE B



TETRA SURFACE C




Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
TETRA SURFACE A (TETRA SA)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent	(12W060) 12.2W / 60cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(24W060) 24.5W / 60cm	
		(27) 2700K		(MP) Microprismatic	(19W093) 19.25W / 93cm	
TETRA SURFACE B (TETRA SB)	(AN) Anodized (WH) White (BL) Black	(30) 3000K	(80) ≥ 80	(TR) Transparent	(38W093) 38.5W / 93cm	
		(40) 4000K		(MS) Milky Satin	(21W102) 21W / 102cm	
		(57) 5700K		(MP) Microprismatic	(42W102) 42W / 102cm	
TETRA SURFACE C (TETRA SC)	(AN) Anodized (WH) White (BL) Black	(30) 3000K	(80) ≥ 80	(TR) Transparent	(24W119) 24.5W / 119cm	
		(40) 4000K		(MS) Milky Satin	(49W119) 49W / 119cm	
		(57) 5700K		(MP) Microprismatic	(31W152) 31.5W / 152cm	
	(AN) Anodized (WH) White (BL) Black	(30) 3000K	(80) ≥ 80	(TR) Transparent	(63W152) 63W / 152cm	
		(40) 4000K		(MS) Milky Satin	(42W202) 42W / 202cm	
		(57) 5700K		(MP) Microprismatic	(84W202) 84W / 202cm	



TETRA SURFACE A



TETRA SURFACE B



TETRA SURFACE C

Ordering Code Example:

TETRA SB - WH - 30 - 80 - MS - 63W152 - 24


Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

- Pendant linear LED with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- L90/B10 50.000h
- IP30
- Low UGR with microprismatic cover.

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
TETRA PENDANT (TETRA PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(TR) Transparent (MS) Milky Satin (MP) Microprismatic	(12W060) 12.2W / 60cm	24VDC (24)
		(25) 2500K			(24W060) 24.5W / 60cm	
		(27) 2700K			(19W093) 19.25W / 93cm	
		(30) 3000K			(38W093) 38.5W / 93cm	
		(40) 4000K			(21W102) 21W / 102cm	
		(57) 5700K			(42W102) 42W / 102cm	
					(24W119) 24.5W / 119cm	
					(49W119) 49W / 119cm	
					(31W152) 31.5W / 152cm	
					(63W152) 63W / 152cm	
					(42W202) 42W / 202cm	
					(84W202) 84W / 202cm	

Ordering Code Example:

TETRA PD - WH - 30 - 80 - MS - 63W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




JOY SURFACE

Interior Linear 

- Linear LED lighting available with satin square or satin round cover.
- Special design and construction to meet the most demanding lighting designs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

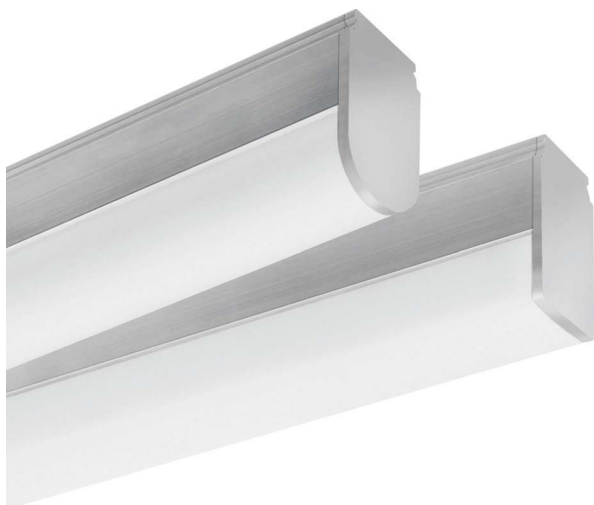

LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
JOY SURFACE (JOY S)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(SS) Satin Square (SR) Satin Round	(07W035) 7W / 35cm	24VDC (24)
	(WH) White (BL) Black	(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

JOY S - AN - 40 - 80 - SR - 31W152 - 24

Available upon request:



- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- Pendant linear LED with satin square or satin round cover.
- Available with different CCT to meet all the architectural needs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

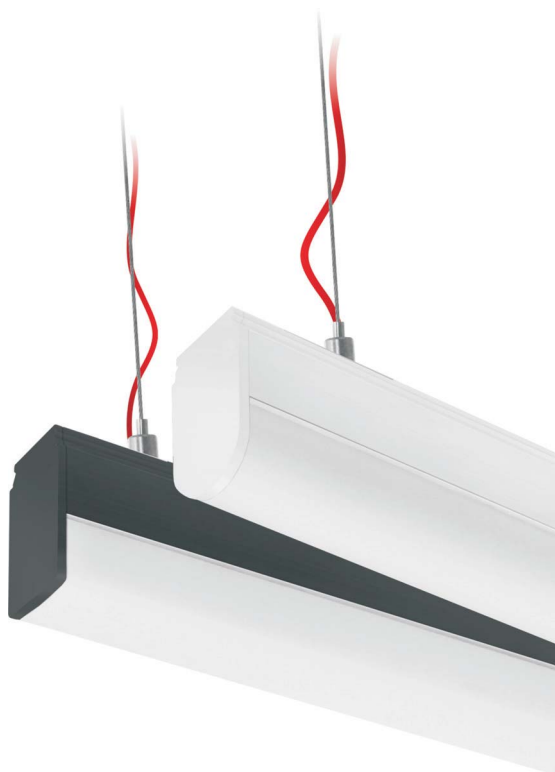

LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
JOY PENDANT (JOY PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(SS) Satin Square (SR) Satin Round	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

JOY PD - AN - 40 - 80 - SR - 31W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA


Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
OMEGA (OMEGA)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(ML) Milky (MS) Milky Satin (RL) Ruled (TR) Transparent	(07W037) 7W / 37cm	24VDC (24)
		(25) 2500K			(12W062) 12.2W / 62cm	
		(27) 2700K			(17W087) 17.5W / 87cm	
		(30) 3000K			(21W104) 21W / 104cm	
		(40) 4000K			(24W121) 24.5W / 121cm	
		(57) 5700K			(31W154) 31.5W / 154cm	
					(42W204) 42W / 204cm	

Ordering Code Example:

OMEGA - AN - 40 - 80 - MS - 24W121 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

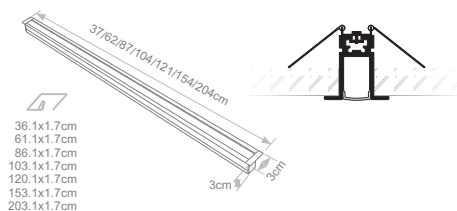




U TYPE



- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
U TYPE (U TYPE)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(ML) Milky (MS) Milky Satin (RL) Ruled (TR) Transparent	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

U TYPE - AN - 40 - 80 - MS - 31W152 - 24

Available upon request:


- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
U TYPE PENDANT (U TYPE PD)	(AN) Anodized (WH) White (BL) Black	(20) 2000K	(80) ≥ 80	(ML) Milky (MS) Milky Satin (RL) Ruled (TR) Transparent	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

U TYPE PD - AN - 40 - 80 - MS - 31W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- Available in 15° & 35°.
- The ARTBAR is ideal for wall washing / concealed lighting / decorative lighting / lighting behind plexiglass.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle	Watt / Length	Voltage
ARTBAR (ARTBAR)	(AN) Anodized	(20) 2000K	{80} ≥ 80	(15) 15° (35) 35°	(07W035) 7W / 35cm	{24} 24VDC
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

ARTBAR - AN - 30 - 80 - 15 - 42W202 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



Management through:

- 4 channels DMX controller with 24VDC PWM output.
- Common Anode
- IP40



ELECSYS QUATRO
TRANSPARENT



ELECSYS QUATRO
MILKY



Model	Luminaire Colour	Multi Colour*	Type / Beam Angle	Watt / Length	Voltage
ELECSYS QUATRO (ELECSYS QUATRO)	(AN) Anodized	(MC) RGBW in one chip	(ML) Milky (TR) Transparent	(08W031) 7,8W / 31cm	(24) 24VDC
	(WH) White			(16W060) 15,6W / 60cm	
	(BL) Black			(21W081) 21,4W / 81cm	
				(33W124) 33,1W / 124cm	
				(49W182) 48,6W / 182cm	
				(53W197) 53,5W / 197cm	


*Available in monochromatic LEDs upon request.

Ordering Code Example:


ELECSYS QUATRO - AN - MC - TR - 49W182 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



with bracket



ARC RECESSED/TRIMLESS



- Linear LED lighting with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- Available for either recessed or trimless installations.
- L90/B10 50.000h
- IP30

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth





ARC RECESSED



ARC TRIMLESS

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
ARC RECESSED <i>(ARC RC)</i>	<i>(WH)</i> White	<i>(20)</i> 2000K	<i>(80)</i> ≥ 80	<i>(ML)</i> Milky <i>(MS)</i> Milky Satin	<i>(07W037)</i> 7W / 37cm	24VDC <i>(24)</i>
					<i>(12W062)</i> 12.2W / 62cm	
					<i>(17W087)</i> 17.5W / 87cm	
					<i>(21W104)</i> 21W / 104cm	
					<i>(24W121)</i> 24.5W / 121cm	
					<i>(31W154)</i> 31.5W / 154cm	
ARC TRIMLESS <i>(ARC TR)</i>		<i>(30)</i> 3000K		<i>(RL)</i> Ruled <i>(TR)</i> Transparent	<i>(42W204)</i> 42W / 204cm	
					<i>(07W035)</i> 7W / 35cm	
					<i>(12W060)</i> 12.2W / 60cm	
					<i>(17W085)</i> 17.5W / 85cm	
					<i>(21W102)</i> 21W / 102cm	
					<i>(24W119)</i> 24.5W / 119cm	
ARC TRIMLESS <i>(ARC TR)</i>	<i>(40)</i> 4000K		<i>(31W152)</i> 31.5W / 152cm			
			<i>(42W202)</i> 42W / 202cm			
			<i>(07W035)</i> 7W / 35cm			
			<i>(12W060)</i> 12.2W / 60cm			
			<i>(17W085)</i> 17.5W / 85cm			
			<i>(21W102)</i> 21W / 102cm			
ARC TRIMLESS <i>(ARC TR)</i>	<i>(57)</i> 5700K		<i>(24W119)</i> 24.5W / 119cm			
			<i>(31W152)</i> 31.5W / 152cm			
			<i>(42W202)</i> 42W / 202cm			
			<i>(07W035)</i> 7W / 35cm			
			<i>(12W060)</i> 12.2W / 60cm			
			<i>(17W085)</i> 17.5W / 85cm			



Ordering Code Example:
ARC TR - WH - 40 - 80 - MS - 31W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

- Linear LED lighting with transparent or milky satin cover.
- Available with different CCT to meet all the architectural needs.
- Available for either recessed or trimless installations.
- L90/B10 50.000h
- IP30

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth





ARC2 RECESSED



ARC2 TRIMLESS

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length		Voltage
ARC2 RECESSED <i>(ARC2 RC)</i>	<i>(WH)</i> White	<i>(20)</i> 2000K	<i>(80)</i> ≥ 80	<i>(ML)</i> Milky	<i>(14W037)</i> 14W / 37cm	24VDC <i>(24)</i>	
		<i>(25)</i> 2500K		<i>(MS)</i> Milky Satin	<i>(24W062)</i> 24.4W / 62cm		
		<i>(27)</i> 2700K		<i>(RL)</i> Ruled	<i>(38W095)</i> 38.5W / 95cm		
		<i>(30)</i> 3000K		<i>(TR)</i> Transparent	<i>(42W104)</i> 42W / 104cm		
		<i>(40)</i> 4000K			<i>(49W121)</i> 49W / 121cm		
		<i>(57)</i> 5700K			<i>(63W154)</i> 63W / 154cm		
ARC2 TRIMLESS <i>(ARC2 TR)</i>					<i>(84W204)</i> 84W / 204cm		
					<i>(14W035)</i> 14W / 35cm		
					<i>(24W060)</i> 24.4W / 60cm		
					<i>(38W093)</i> 38.5W / 93cm		
					<i>(42W102)</i> 42W / 102cm		
					<i>(49W119)</i> 49W / 119cm		
				<i>(63W152)</i> 63W / 152cm			
				<i>(84W202)</i> 84W / 202cm			



Ordering Code Example:
ARC2 TR - WH - 40 - 80 - MS - 24W060 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

ARC3 TRIMLESS




- Linear LED lighting with Milky, Milky Satin, Ruled or Transparent Cover.
- Available with different CCT to meet all the architectural needs.
- Wall trimless applications.
- L90/B10 50.000h
- IP30

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth




ARC3 TRIMLESS



LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
ARC3 TRIMLESS (ARC3 TR)	(WH) White	(20) 2000K	(80) ≥ 80	(ML) Milky (MS) Milky Satin (RL) Ruled (TR) Transparent	(07W035) 7W / 35cm	24VDC (24)
		(25) 2500K			(12W060) 12.2W / 60cm	
		(27) 2700K			(17W085) 17.5W / 85cm	
		(30) 3000K			(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	



Ordering Code Example:

ARC3 TR - WH - 40 - 80 - MS - 31W152 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- The ARTTUBE is an elegant series for wall washing applications.
- Available in 15° & 35°.
- Available in monochromatic LEDs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle / Type	Watt / Length	Voltage
ARTTUBE (ARTTUBE)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(15) 15°	(07W035) 7W / 35cm	(24) 24VDC
		(25) 2500K		(35) 35°	(12W060) 12.2W / 60cm	
		(27) 2700K		(ML) Milky	(17W085) 17.5W / 85cm	
		(30) 3000K		(TR) Transparent	(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

ARTTUBE - AN - 30 - 80 - 15 - 42W202 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version



- The ARTTUBE is an elegant series for pendant applications.
- Available in monochromatic LEDs.
- L90/B10 50.000h
- IP40

Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth



LIGHTSOURCE BY
NICHIA



Model	Luminaire Colour	Colour Temperature	Colour Rendering	Beam Angle / Type	Watt / Length	Voltage
ARTTUBE PENDANT (ARTTUBE PD)	(AN) Anodized	(20) 2000K	(80) ≥ 80	(15) 15°	(07W035) 7W / 35cm	(24) 24VDC
		(25) 2500K		(35) 35°	(12W060) 12.2W / 60cm	
		(27) 2700K		(ML) Milky	(17W085) 17.5W / 85cm	
		(30) 3000K		(TR) Transparent	(21W102) 21W / 102cm	
		(40) 4000K			(24W119) 24.5W / 119cm	
		(57) 5700K			(31W152) 31.5W / 152cm	
					(42W202) 42W / 202cm	

Ordering Code Example:

ARTTUBE PD - AN - 30 - 80 - 15 - 42W202 - 24

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version




STAIR DUE



- Linear LED lighting available with milky, milky satin, ruled or transparent cover.
- Special design and construction to meet the most demanding lighting designs.
- L90/B10 50.000h
- IP30


Lighting management options:

On-Off/DALI/0..10V/1..10V/DMX512/PHASE CUT/IR/RF/PUSH BUTTON/Bluetooth

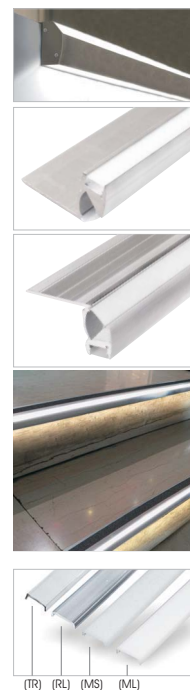

LIGHTSOURCE BY
NICHIA

Model	Luminaire Colour	Colour Temperature	Colour Rendering	Type	Watt / Length	Voltage
STAIR DUE (STAIR DUE)	Anodized Black (AB)	(20) 2000K	(80) ≥ 80	(ML) Milky	(14W035) 14W / 35cm	24VDC (24)
		(25) 2500K		(MS) Milky Satin	(24W060) 24.4W / 60cm	
		(27) 2700K		(RL) Ruled	(38W093) 38.5W / 93cm	
	Anodized Silver (AS)	(30) 3000K		(TR) Transparent	(42W102) 42W / 102cm	
		(40) 4000K			(49W119) 49W / 119cm	
		(57) 5700K			(63W152) 63W / 152cm	
					(84W202) 84W / 202cm	



Ordering Code Example:

STAIR DUE - AB - 27 - 80 - MS - 63W152 - 24

IP66 Available upon request

Available upon request:

- ✓ Custom dimensions
- ✓ Custom luminaire colours
- ✓ Emergency version

