



INTERIOR SPOTLIGHTS


TRACK SYSTEM

Interior Spotlights 


- 3-circuit track system available in white and black colour.
- Available in 3 different lengths.
- Two types available for surface or recessed installation.
- Available accessories in white, black and grey colour.

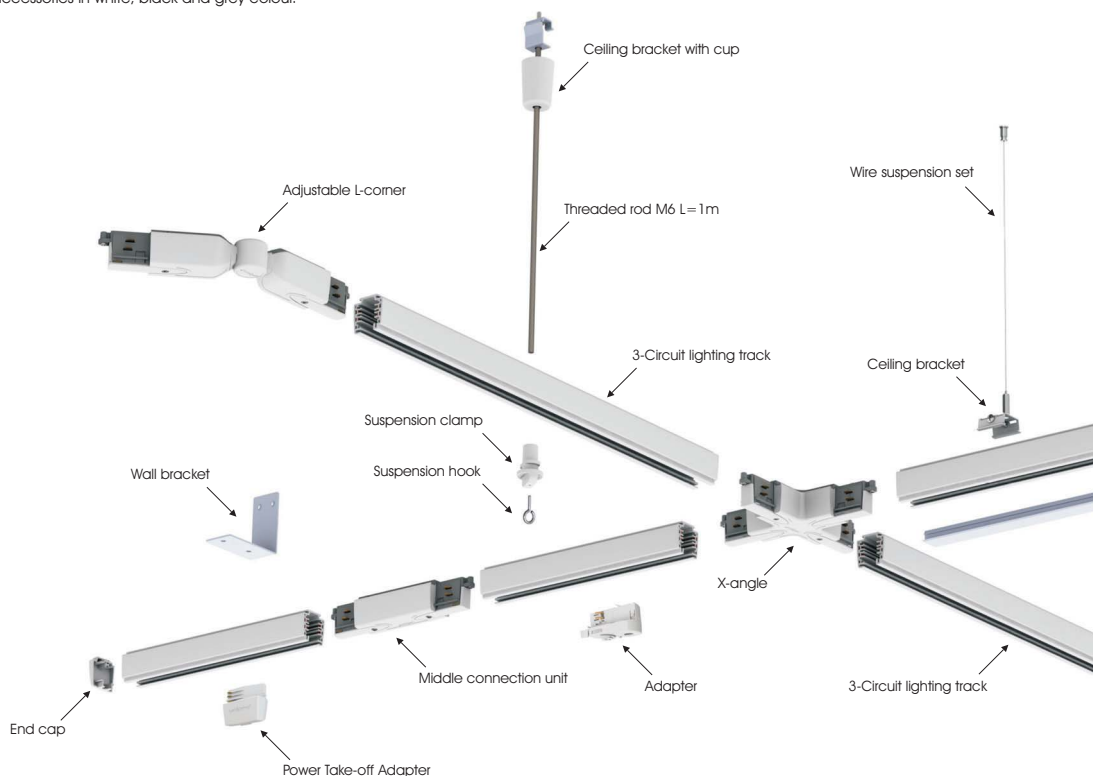

3-Circuit lighting track




Code	Model	Length	Colour
TRA.001	3-Circuit lighting track	2m	White
TRA.002	3-Circuit lighting track	3m	White
TRA.003	3-Circuit lighting track	4m	White
TRA.004	3-Circuit lighting track	2m	Grey
TRA.005	3-Circuit lighting track	3m	Grey
TRA.006	3-Circuit lighting track	4m	Grey
TRA.007	3-Circuit lighting track	2m	Black
TRA.008	3-Circuit lighting track	3m	Black
TRA.009	3-Circuit lighting track	4m	Black

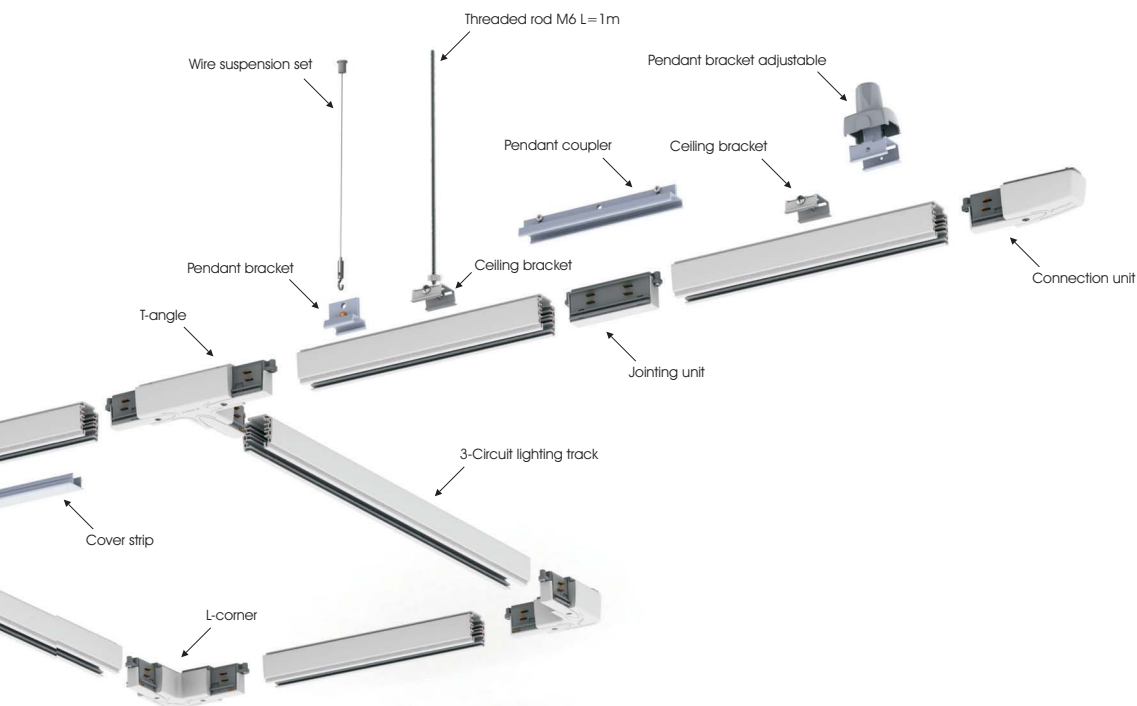

3-Circuit lighting track, Recessed



Code	Model	Length	Colour
TRA.010	3-Circuit lighting track, Recessed	2m	White
TRA.011	3-Circuit lighting track, Recessed	3m	White
TRA.012	3-Circuit lighting track, Recessed	4m	White
TRA.013	3-Circuit lighting track, Recessed	2m	Grey
TRA.014	3-Circuit lighting track, Recessed	3m	Grey
TRA.015	3-Circuit lighting track, Recessed	4m	Grey
TRA.016	3-Circuit lighting track, Recessed	2m	Black
TRA.017	3-Circuit lighting track, Recessed	3m	Black
TRA.018	3-Circuit lighting track, Recessed	4m	Black



Accessories

Code	Description	Colour
------	-------------	--------

Power supply (end feed)

TRA.031	Connection unit A	White
TRA.032	Connection unit B	White
TRA.033	Connection unit A	Grey
TRA.034	Connection unit B	Grey
TRA.035	Connection unit A	Black
TRA.036	Connection unit B	Black

Middle connection (middle feed)

TRA.037	Middle connection unit	White
TRA.038	Middle connection unit	Grey
TRA.039	Middle connection unit	Black

Jointing (multicolour)

TRA.040	Jointing unit	White
TRA.041	Jointing unit	Grey
TRA.042	Jointing unit	Black

90° corner (feed)

TRA.043	L-corner	White
TRA.044	L-corner	Grey
TRA.045	L-corner	Black

Adjustable corner

TRA.046	Adjustable L-corner	White
TRA.047	Adjustable L-corner	Grey
TRA.048	Adjustable L-corner	Black

T-connector (feed)

TRA.049	T-angle A	White
TRA.050	T-angle B	White
TRA.051	T-angle C	White
TRA.052	T-angle D	White
TRA.053	T-angle A	Grey
TRA.054	T-angle B	Grey
TRA.055	T-angle C	Grey
TRA.056	T-angle D	Grey
TRA.057	T-angle A	Black
TRA.058	T-angle B	Black
TRA.059	T-angle C	Black
TRA.060	T-angle D	Black

X-connector (feed)

TRA.061	X-angle	White
TRA.062	X-angle	Grey
TRA.063	X-angle	Black

3 Phase Adapter

TRA.097	3 Phase Adapter	White
TRA.098	3 Phase Adapter	Black
TRA.099	3 Phase Adapter	Grey

End cap

TRA.064	End cap	White
TRA.065	End cap	Grey
TRA.066	End cap	Black

Cover plate

TRA.067	Cover plate	White
TRA.068	Cover plate	Grey
TRA.069	Cover plate	Black

Ceiling adapter

TRA.118	Ceiling adapter	Black
TRA.119	Ceiling adapter	White





Code	Description	Colour
<i>Track suspension parts</i>		
TRA.070	Ceiling bracket	White
TRA.071	Ceiling bracket	Grey
TRA.072	Ceiling bracket	Black
TRA.073	Wire suspension set 1,5 m adjustable	
TRA.074	Wire suspension set 4 m adjustable	
TRA.117	Wire suspension set 4 m adjustable	Black
TRA.075	Threaded rod M6 L=1 m	
TRA.076	Extension nut for threaded rod M6	
TRA.077	Tube for rod, white	
TRA.078	Nut for threaded rod M6	
TRA.079	Pendant bracket adjustable	White
TRA.080	Pendant bracket adjustable	Grey
TRA.081	Pendant bracket adjustable	Black
TRA.082	Pendant bracket	White
TRA.083	Pendant bracket	Grey
TRA.084	Pendant bracket	Black
TRA.085	Pendant coupler	White
TRA.086	Pendant coupler	Grey
TRA.087	Pendant coupler	Black
TRA.088	Ceiling bracket with cup	White
TRA.089	Ceiling bracket with cup	Black
TRA.090	Wall bracket	White
TRA.091	Wall bracket	Black
TRA.092	Suspension clamp	White
TRA.093	Suspension clamp	Black
TRA.094	Suspension hook	
TRA.095	Cover strip L=2m	White
TRA.096	Cover strip L=2m	Black
TRA.100	Locker	White
TRA.101	Locker	Black
TRA.102	Locker	Grey
TRA.103	AL-Nipple M10 Rotating, Thread 8mm	
TRA.104	AL-Nipple M10 Rotating, Thread 8mm	
TRA.105	Installation tool	
TRA.106	Cable clamp	
TRA.107	Counter Nut	
TRA.108	Power Take-off Adapter	White
TRA.109	Power Take-off Adapter	Black
TRA.110	Power Take-off Adapter	Grey
TRA.111	Adapter with logo	White
TRA.112	Adapter with logo	Black
TRA.113	Adapter with logo	Grey

CALLISTO X

Interior Spotlights 

- Track lights ideal for retail and museum lighting.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- 3 SDCM
- L90/B10 - 50.000h




Honeycomb



Antiglare Ring




Barn Door

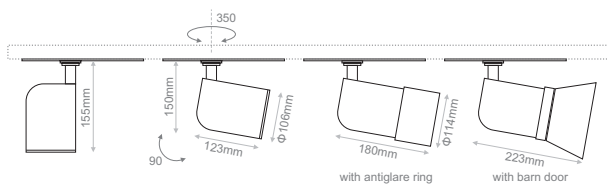

Model (LED Power)	Colour Temperature* - LED Lumen	CRI	Beam Angle	Type	Colour	Dimming Option	Accessories
CALLISTO X 31.3W (CALLISTO X31)	(27B4510) 2700K - 4510lm	(80) 80	(18) 18° (31) 31° (44) 44° (59) 59°	(AD) Adjustable	(WH) White (BL) Black	(ND) Non-Dimmable (DL) DALI (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming**	(0X) Standard (1X) Honeycomb (XX) extras (X0) No Extras (X1) Antiglare Ring Black (X2) Antiglare Ring White (X3) Barn Door Black (X4) Barn Door White
	(30B4792) 3000K - 4792lm						
	(40B4933) 4000K - 4933lm						
	(57B4792) 5700K - 4792lm						
	(27B3721) 2700K - 3721lm	(90) 90					
	(30B3890) 3000K - 3890lm						
	(40B4115) 4000K - 4115lm						
	(27B3298) 2700K - 3298lm						
(30B3524) 3000K - 3524lm							
CALLISTO X 37.1W (CALLISTO X37)	(27B5199) 2700K - 5199lm	(80) 80					
	(30B5524) 3000K - 5524lm						
	(40B5687) 4000K - 5687lm						
	(57B5524) 5700K - 5524lm						
	(27B4289) 2700K - 4289lm	(90) 90					
	(30B4484) 3000K - 4484lm						
	(40B4744) 4000K - 4744lm						
	(27B3802) 2700K - 3802lm						(97) 97
(30B4062) 3000K - 4062lm							

* Available in 3500K, 5000K and 6500K upon request
**Available only for 31.3W version

Ordering Code Example:
CALLISTO X31-30B3524-97-59-AD-BL-ND-12

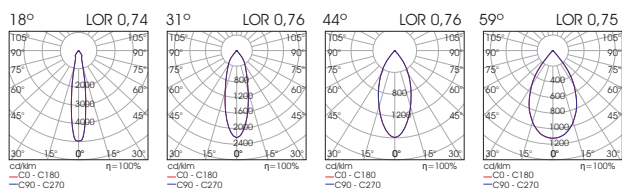

CALLISTO D

Interior Spotlights 

- Track lights ideal for retail and museum lighting.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- 3 SDCM
- L90/B10 - 50.000h




Honeycomb



Antiglare Ring



Barn Door

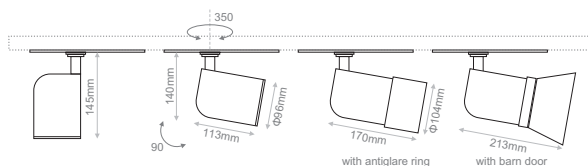


Model (LED Power)	Colour Temperature* - LED Lumen	CRI	Beam Angle	Type	Colour	Dimming Option	Accessories	
CALLISTO D 25.3W (CALLISTO D25)	(27B3384) 2700K - 3384lm	(80) 80	(16) 16° (25) 25° (39) 39° (53) 53°	(AD) Adjustable	(WH) White (BL) Black	(ND) Non-Dimmable (DL) DALI (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	(0X) Standard	
	(30B3593) 3000K - 3593lm						(1X) Honeycomb	
	(40B3701) 4000K - 3701lm							
	(57B3595) 5700K - 3595lm							
	(27B2792) 2700K - 2792lm	(90) 90					(XX) extras	
	(30B2919) 3000K - 2919lm							(X0) No Extras
	(40B3088) 4000K - 3088lm							(X1) Antiglare Ring Black
	(27B2475) 2700K - 2475lm							(X2) Antiglare Ring White
(30B2644) 3000K - 2644lm	(97) 97	(X3) Barn Door Black						
		(X4) Barn Door White						
CALLISTO D 31.3W (CALLISTO D31)	(27B4510) 2700K - 4510lm	(80) 80	(23) 23° (31) 31° (41) 41° (53) 53°	(AD) Adjustable	(WH) White (BL) Black	(ND) Non-Dimmable (DL) DALI (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming		
	(30B4792) 3000K - 4792lm							
	(40B4933) 4000K - 4933lm							
	(57B4792) 5700K - 4792lm							
	(27B3721) 2700K - 3721lm	(90) 90					(XX) extras	
	(30B3890) 3000K - 3890lm							(X0) No Extras
	(40B4115) 4000K - 4115lm							(X1) Antiglare Ring Black
	(27B3298) 2700K - 3298lm							(X2) Antiglare Ring White
(30B3524) 3000K - 3524lm	(97) 97	(X3) Barn Door Black						
		(X4) Barn Door White						

* Available in 3500K, 5000K and 6500K upon request


Ordering Code Example:

CALLISTO D25-40B3088-90-25-BL-ND-11

CALLISTO D 25.3W

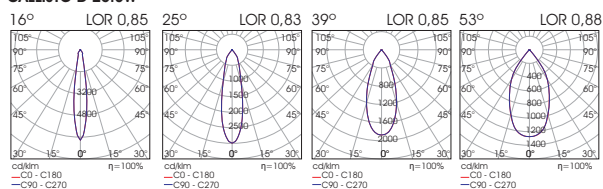

CALLISTO D 31.3W

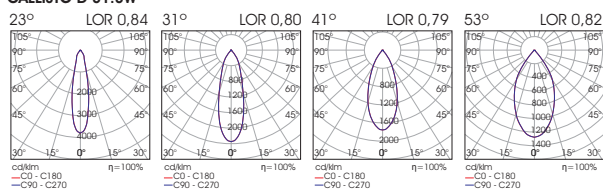

CALLISTO D WD

Interior Spotlights 

- Track lights ideal for retail and museum lighting.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- 3 SDCM
- L90/B10 - 50.000h



Warm Dimming **3000K to 1800K**

LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CALLISTO D WD 30.6W (CALLISTO D WD30)	(1830B2850) 1800K-3000K	2850lm	(AD) Adjustable	(95) 95	(23) 23° (31) 31° (41) 41° (53) 53°	(WH) White (BL) Black	(DL) DALI (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	(0/X) Standard (1/X) Honeycomb ↓ (XX) extras (X0) No Extras (X1) Antiglare Ring Black (X2) Antiglare Ring White (X3) Barn Door Black (X4) Barn Door White

Ordering Code Example:
CALLISTO D WD30-1830B2850-AD-95-41-BL-PC-12


Honeycomb



Antiglare Ring



Barn Door

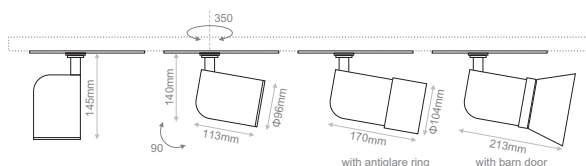

- Track lights ideal for retail and museum lighting.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- 3 SDCM
- L90/B10 - 50.000h




Honeycomb



Antiglare Ring



Barn Door

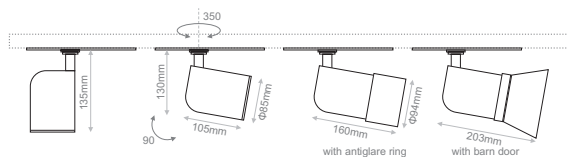


Model (LED Power)	Colour Temperature* - LED Lumen	CRI	Beam Angle	Type	Colour	Dimming Option	Accessories
CALLISTO N 17.5W (CALLISTO N18)	(27B2482) 2700K - 2482lm	(80) 80	(17) 17° (28) 28° (42) 42° (58) 58°	(AD) Adjustable	(WH) White (BL) Black	(ND) Non-Dimmable (DL) DALI (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	(0) Standard (1) Honeycomb ↓ (XX) extras (X0) No Extras (X1) Antiglare Ring Black (X2) Antiglare Ring White (X3) Barn Door Black (X4) Barn Door White
	(30B2637) 3000K - 2637lm						
	(40B2714) 4000K - 2714lm						
	(57B2637) 5700K - 2637lm						
	(27B2048) 2700K - 2048lm	(90) 90					
	(30B2140) 3000K - 2140lm						
	(40B2265) 4000K - 2265lm						
	(27B1815) 2700K - 1815lm	(97) 97					
(30B1939) 3000K - 1939lm							
CALLISTO N 25.3W (CALLISTO N25)	(27B3384) 2700K - 3384lm	(80) 80					
	(30B3595) 3000K - 3595lm						
	(40B3701) 4000K - 3701lm						
	(57B2637) 5700K - 2637lm						
	(27B2792) 2700K - 2792lm	(90) 90					
	(30B2919) 3000K - 2919lm						
	(40B3088) 4000K - 3088lm						
	(27B2475) 2700K - 2475lm	(97) 97					
(30B2644) 3000K - 2644lm							

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example:

CALLISTO N18-27B2048-90-42-AD-WH-ND-02

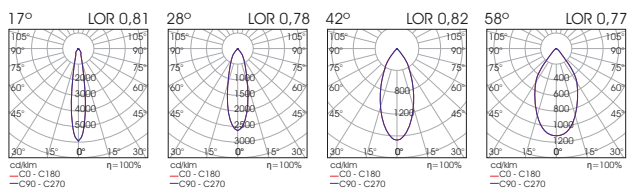

- Track lights ideal for retail and museum lighting.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- 3 SDCM
- L90/B10 - 50.000h




Warm Dimming **3000K to 1800K**

LIGHTSOURCE BY
bridgelux

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CALLISTO N WD 16.5W <i>(CALLISTO N WD17)</i>	<i>(1830B1520)</i> 1800K-3000K 1520lm	<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(17)</i> 17°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(DL)</i> DALI	<i>(0X)</i> Standard <i>(1X)</i> Honeycomb ↓ <i>{XX}</i> ↑ extras <i>(X0)</i> No Extras <i>(X1)</i> Antiglare Ring Black <i>(X2)</i> Antiglare Ring White <i>(X3)</i> Barn Door Black <i>(X4)</i> Barn Door White	
				<i>(28)</i> 28°		<i>(PC)</i> Phase Cut (Trailing Edge Dimmer)		
				<i>(42)</i> 42°		<i>(LD)</i> Local Dimming		
				<i>(58)</i> 58°				

Ordering Code Example:
CALLISTO N WD17-1830B1520-AD-95-28-BL-PC-10

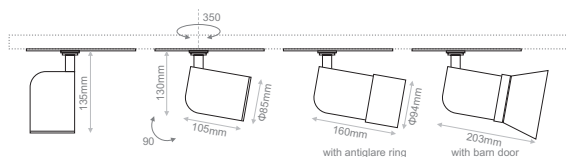

- RIENA track light series is available in 3 different models.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Black or White colour of fittings.
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
RIENA X 25.3W <i>(RIENA X25)</i>	<i>(27B3384)</i> 2700K - 3384lm	<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(19)</i> 19° <i>(27)</i> 27° <i>(36)</i> 36°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable <i>(PC)</i> Phase Cut (Trailing Edge Dimmer)	
	<i>(30B3541)</i> 3000K - 3541lm						
	<i>(40B3665)</i> 4000K - 3665lm						
	<i>(57B3840)</i> 5700K - 3840lm						

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:
RIENA X25-40B3665-AD-80-36-WH-PC



- RIENA track light series is available in 3 different models.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Black or White colour of fittings.
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux®

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
RIENA D 17.5W <i>(RIENA D18)</i>	<i>(27B2482)</i> 2700K - 2482lm	<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(20)</i> 20° <i>(26)</i> 26°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable	
	<i>(30B2597)</i> 3000K - 2597lm					<i>(PC)</i> Phase Cut (Trailing Edge Dimmer)	
	<i>(40B2688)</i> 4000K - 2688lm						
	<i>(57B2816)</i> 5700K - 2816lm						

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:
RIENA D18-40B2688-AD-80-26-WH-PC

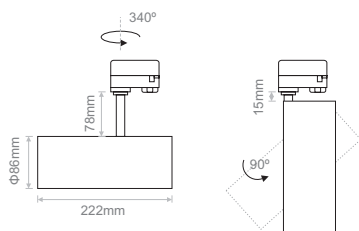

- RIENA track light series is available in 3 different models.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Black or White colour of fittings.
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
RIENA N 12.5W <i>(RIENA N13)</i>	<i>(27B1662)</i> 2700K - 1662lm	<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(17)</i> 17° <i>(30)</i> 30°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable	
	<i>(30B1739)</i> 3000K - 1739lm					<i>(PC)</i> Phase Cut	
	<i>(40B1800)</i> 4000K - 1800lm					(Trailing Edge Dimmer)	
	<i>(57B1886)</i> 5700K - 1886lm						

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:
RIENA N13-40B1800-AD-80-17-WH-PC



- Track lights ideal for retail and museum lighting.
- Aluminium die-casting housing.
- Adjustable beam angle: 18°(min) - 68°(max)
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Black or White colour of fittings.
- 3 circuit track adaptor.
- 3 SDCM
- IP Rate: IP20




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature* - LED Lumen	CRI	Beam Angle	Type	Colour	Dimming Option
FERIA ZOOM X 28.4W <i>(FERIA ZOOM X28)</i>	<i>(27B3992)</i> 2700K - 3992lm	<i>(80)</i> 80	<i>(18/68)</i> Adjustable 18° _(min) -68° _(max)	<i>(AD)</i> Adjustable	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable
	<i>(30B4242)</i> 3000K - 4242lm					
	<i>(40B4366)</i> 4000K - 4366lm					
	<i>(57B4242)</i> 5700K - 4242lm					
	<i>(27B3293)</i> 2700K - 3293lm	<i>(90)</i> 90				
	<i>(30B3443)</i> 3000K - 3443lm					
	<i>(40B3642)</i> 4000K - 3642lm					
FERIA ZOOM X 38.3W <i>(FERIA ZOOM X38)</i>	<i>(27B5133)</i> 2700K - 5133lm	<i>(80)</i> 80				
	<i>(30B5455)</i> 3000K - 5455lm					
	<i>(40B5615)</i> 4000K - 5615lm					
	<i>(57B5455)</i> 5700K - 5455lm					
	<i>(27B4236)</i> 2700K - 4236lm	<i>(90)</i> 90				
	<i>(30B4428)</i> 3000K - 4428lm					
	<i>(40B4684)</i> 4000K - 4684lm					

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example:

FERIA ZOOM X28-40B4366-80-1868-AD-BL-ND

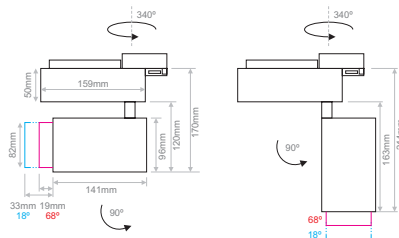

Adjustable beam angle



FERIA ZOOM D

Interior Spotlights 

- Track lights ideal for retail and museum lighting.
- Aluminium die-casting housing.
- Adjustable beam angle: 21°(min) - 62°(max)
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Black or White colour of fittings.
- 3 circuit track adaptor.
- 3 SDCM
- IP Rate: IP20




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature* - LED Lumen	CRI	Beam Angle	Type	Colour	Dimming Option
FERIA ZOOM D 25.3W <i>(FERIA ZOOM D25)</i>	[27B3384] 2700K - 3384lm	<i>[80]</i> 80	<i>[2162]</i> Adjustable 21° _(min) -62° _(max)	<i>[AD]</i> Adjustable	<i>[WH]</i> White <i>[BL]</i> Black	<i>[ND]</i> Non-Dimmable
	[30B3595] 3000K - 3595lm					
	[40B3701] 4000K - 3701lm					
	[57B3595] 5700K - 3595lm					
	[27B2792] 2700K - 2792lm	<i>[90]</i> 90				
	[30B2919] 3000K - 2919lm					
	[40B3088] 4000K - 3088lm					
	[27B2475] 2700K - 2475lm	<i>[97]</i> 97				
[30B2644] 3000K - 2644lm						
FERIA ZOOM D 32.3W <i>(FERIA ZOOM D32)</i>	[27B4485] 2700K - 4485lm	<i>[80]</i> 80				
	[30B4766] 3000K - 4766lm					
	[40B4906] 4000K - 4906lm					
	[57B4766] 5700K - 4766lm					
	[27B3701] 2700K - 3701lm	<i>[90]</i> 90				
	[30B3868] 3000K - 3868lm					
	[40B4092] 4000K - 4092lm					

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example:

FERIA ZOOM D32-27B3701-90-2162-AD-WH-ND

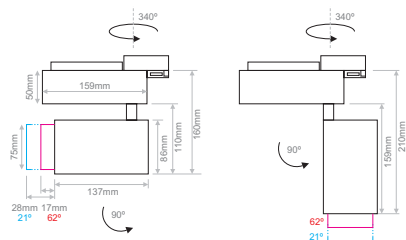

Adjustable beam angle



- Track lights ideal for retail and museum lighting.
- Aluminium die-casting housing.
- Adjustable beam angle: 18°(min) - 57°(max)
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Black or White colour of fittings.
- 3 circuit track adaptor.
- 3 SDCM
- IP Rate: IP20




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Colour Temperature* - LED Lumen	CRI	Beam Angle	Type	Colour	Dimming Option
FERIA ZOOM N 17.7W <i>(FERIA ZOOM N18)</i>	<i>(27B2302)</i> 2700K - 2302lm	<i>(80)</i> 80	<i>(1857)</i> Adjustable 18°(min)-57°(max)	<i>(AD)</i> Adjustable	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable
	<i>(30B2445)</i> 3000K - 2445lm					
	<i>(40B2518)</i> 4000K - 2518lm					
	<i>(57B2445)</i> 5700K - 2445lm					
	<i>(27B1899)</i> 2700K - 1899lm	<i>(90)</i> 90				
	<i>(30B1985)</i> 3000K - 1985lm					
	<i>(40B2100)</i> 4000K - 2100lm					

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example:
FERIA ZOOM N18-30B2445-80-1857-AD-BL-ND

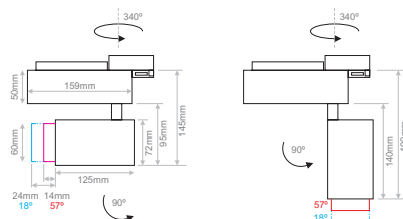

Adjustable beam angle



HAZEL MAX

Interior Spotlights 

- Track lights ideal for retail and museum lighting.
- High purity aluminium.
- Adjustable 320° on the horizontal plane & 100° on the vertical plane.
- White or black colour of fittings.
- 3 circuit track adaptor.
- 2-3 SDCM
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
HAZEL MAX 30.7W (HAZEL MAX 30)	(27B4143) 2700K - 4143lm	Adjustable	(AD)	(80) 80	(25) 25° (45) 45° (70) 70°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B4335) 3000K - 4335lm							
	(40B4489) 4000K - 4489lm							
	(57B4704) 5700K - 4704lm							
HAZEL MAX 30.7W (HAZEL MAX 30)	(27B3452) 2700K - 3452lm	Adjustable	(AD)	(90) 90	(25) 25° (45) 45° (70) 70°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B3582) 3000K - 3582lm							
	(40B3841) 4000K - 3841lm							
HAZEL MAX 31.3W (HAZEL MAX 30)	(27B3048) 2700K - 3048lm	Adjustable	(AD)	(97) 97	(25) 25° (45) 45° (70) 70°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B3245) 3000K - 3245lm							

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:

HAZEL MAX 30 - 30B4335 - AD - 80 - 70 - BL - PC - 20

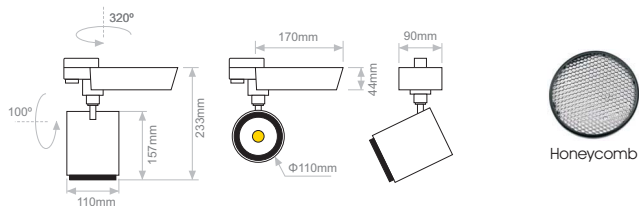

- Track lights ideal for retail and museum lighting.
- High purity aluminium.
- Adjustable 320° on the horizontal plane & 100° on the vertical plane.
- White or black colour of fittings.
- 3 circuit track adaptor.
- L90/B10 - 50.000h

Warm Dimming 3000K to 1800K




LIGHTSOURCE BY
bridgeLux®

Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
HAZEL MAX WD 30.7W <i>(HAZEL MAX WD30)</i>	<i>(1830B2840)</i> 1800K-3000K 2840lm	<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(17)</i> 17°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(PC)</i> Phase Cut (Trailing Edge Dimmer) <i>(LD)</i> Local Dimming	COVER	
				<i>(40)</i> 40°			<i>(0X)</i> Standard <i>(2X)</i> Honeycomb	
				<i>(60)</i> 60°			↓ <i>{XX}</i>	
							EXTRAS	
								<i>(X0)</i> No Extras


Ordering Code Example:

HAZEL MAX WD30 - 1830B2840 - AD - 95 - 60 - BL - PC - 20

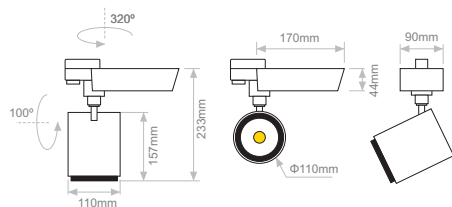

Honeycomb

Warm dimming 3000K to 1800K



- Track lights ideal for retail and museum lighting.
- High purity aluminium.
- Adjustable 320° on the horizontal plane & 100° on the vertical plane.
- White or black colour of fittings.
- 3 circuit track adaptor.
- 2-3 SDCM
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
HAZEL 16.5W (HAZEL 16)	(27B2379)	2700K - 2379lm	(AD) Adjustable	(80) 80	(25) 25° (40) 40° (60) 60°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B2489)	3000K - 2489lm						
	(40B2576)	4000K - 2576lm						
	(57B2700)	5700K - 2700lm						
HAZEL 16.5W (HAZEL 16)	(27B1982)	2700K - 1982lm	(AD) Adjustable	(90) 90	(25) 25° (40) 40° (60) 60°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B2056)	3000K - 2056lm						
	(40B2205)	4000K - 2205lm						
HAZEL 16.7W (HAZEL 16)	(27B1809)	2700K - 1809lm	(AD) Adjustable	(97) 97	(25) 25° (40) 40° (60) 60°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B1926)	3000K - 1926lm						

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:

HAZEL 16 - 30B2056 - AD - 90 - 40 - BL - PC - 20

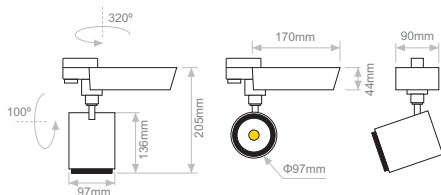

Honeycomb



KARIN MAX

Interior Spotlights 

- Track lights ideal for retail and museum lighting.
- High purity aluminium.
- Adjustable 320° on the horizontal plane & 145° on the vertical plane.
- White or black colour of fittings.
- 3 circuit track adaptor.
- 2-3 SDCM
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
KARIN MAX 30.7W <i>(KARIN MAX 30)</i>	(27B4143)	2700K - 4143lm	Adjustable <i>(AD)</i>	(80) 80	(25) 25° (45) 45° (70) 70°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable <i>(PC)</i> Phase Cut <i>(Trailing Edge Dimmer)</i> <i>(LD)</i> Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) EXTRAS (X0) No Extras
	(30B4335)	3000K - 4335lm						
	(40B4489)	4000K - 4489lm						
	(57B4704)	5700K - 4704lm						
KARIN MAX 30.7W <i>(KARIN MAX 30)</i>	(27B3452)	2700K - 3452lm		(90) 90				
	(30B3582)	3000K - 3582lm						
	(40B3841)	4000K - 3841lm						
KARIN MAX 31.3W <i>(KARIN MAX 30)</i>	(27B3048)	2700K - 3048lm		(97) 97				
	(30B3245)	3000K - 3245lm						

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:

KARIN MAX 30 - 30B4335 - AD - 80 - 70 - BL - PC - 20

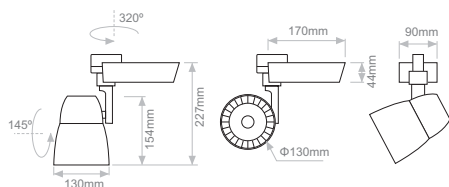

Honeycomb

- Track lights ideal for retail and museum lighting.
- High purity aluminium.
- Adjustable 320° on the horizontal plane & 145° on the vertical plane.
- White or black colour of fittings.
- 3 circuit track adaptor.
- L90/B10 - 50.000h

Warm Dimming **3000K to 1800K**




LIGHTSOURCE BY
bridgeLux


Model (Led Power)	Colour Temperature	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
KARIN MAX WD 30.7W <i>(KARIN MAX WD30)</i>	<i>(1830B2840)</i> 1800K-3000K 2840lm	<i>(AD)</i> Adjustable	<i>(95)</i> 95	<i>(17)</i> 17°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(PC)</i> Phase Cut (Trailing Edge Dimmer) <i>(LD)</i> Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ {XX} EXTRAS (X0) No Extras	
				<i>(25)</i> 25°				
				<i>(40)</i> 40°				
				<i>(60)</i> 60°				

Ordering Code Example:

KARIN MAX WD30 - 1830B2840 - AD - 95 - 60 - BL - PC - 20

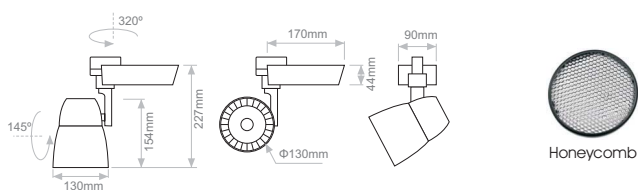

Warm dimming 3000K to 1800K



- Track lights ideal for retail and museum lighting.
- High purity aluminium.
- Adjustable 320° on the horizontal plane & 145° on the vertical plane.
- White or black colour of fittings.
- 3 circuit track adaptor.
- 2-3 SDCM
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
KARIN 16.5W (KARIN 16)	(27B2379)	2700K - 2379lm	(AD) Adjustable	(80) 80	(30) 30° (45) 45° (55) 55°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras
	(30B2489)	3000K - 2489lm						
	(40B2576)	4000K - 2576lm						
	(57B2700)	5700K - 2700lm						
KARIN 16.5W (KARIN 16)	(27B1982)	2700K - 1982lm	(AD) Adjustable	(90) 90	(30) 30° (45) 45° (55) 55°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras
	(30B2056)	3000K - 2056lm						
	(40B2205)	4000K - 2205lm						
KARIN 16.7W (KARIN 16)	(27B1809)	2700K - 1809lm	(AD) Adjustable	(97) 97	(30) 30° (45) 45° (55) 55°	(WH) White (BL) Black	(ND) Non-Dimmable (PC) Phase Cut (Trailing Edge Dimmer) (LD) Local Dimming	COVER (0X) Standard (2X) Honeycomb ↓ (XX) ↑ EXTRAS (X0) No Extras
	(30B1926)	3000K - 1926lm						

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example:

KARIN 16 - 30B2056 - AD - 90 - 55 - BL - PC - 20

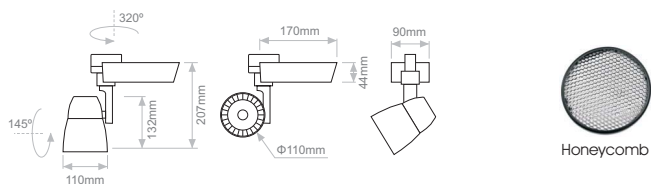

Honeycomb

- High efficiency deep reflector with clear cover glass.
- Track light ideal for retail lighting.
- 320° adjustable on the horizontal plane & 230° on the vertical plane.
- 2-3 SDCM
- L90/B10 - 50.000h




LIGHTSOURCE BY
bridgelux®

Model (LED Power)	Colour Temperature* - LED Lumen		Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
DEDALOS 12.2W <i>(DEDALOS 12)</i>	<i>(27B1575)</i>	2700K - 1575lm	<i>(AD)</i> Adjustable	<i>(80)</i> 80	<i>(20)</i> 20 <i>(30)</i> 30°	<i>(WH)</i> White <i>(BL)</i> Black	<i>(ND)</i> Non-Dimmable <i>(PC)</i> Phase Cut	COVER <i>(0X)</i> Standard <i>(1X)</i> Diffuser <i>(2X)</i> Honeycomb ↓ <i>(XX)</i> EXTRAS <i>(X0)</i> No Extras
	<i>(30B1657)</i>	3000K - 1657lm						
	<i>(40B1706)</i>	4000K - 1706lm						
	<i>(57B1788)</i>	5700K - 1788lm						
DEDALOS 17.1W <i>(DEDALOS 17)</i>	<i>(27B2382)</i>	2700K - 2382lm						
	<i>(30B2481)</i>	3000K - 2481lm						
	<i>(40B2581)</i>	4000K - 2581lm						
	<i>(57B2705)</i>	5700K - 2705lm						
DEDALOS 12.2W <i>(DEDALOS 12)</i>	<i>(27B1313)</i>	2700K - 1313lm						
	<i>(30B1362)</i>	3000K - 1362lm						
	<i>(40B1460)</i>	4000K - 1460lm						
DEDALOS 17.1W <i>(DEDALOS 17)</i>	<i>(27B1985)</i>	2700K - 1985lm						
	<i>(30B2060)</i>	3000K - 2060lm						
	<i>(40B2209)</i>	4000K - 2209lm						
DEDALOS 12.5W <i>(DEDALOS 12)</i>	<i>(27B1121)</i>	2700K - 1121lm						
	<i>(30B1196)</i>	3000K - 1196lm						
DEDALOS 17.5W <i>(DEDALOS 17)</i>	<i>(27B1660)</i>	2700K - 1660lm						
	<i>(30B1783)</i>	3000K - 1783lm						

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example:
DEDALOS 17 - 30B2060 - AD - 90 - 30 - BL - PC - 00

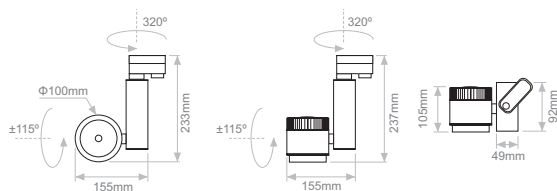

ADORNO TRACK Retrofit

Interior Spotlights 

- Adorno series track light is available with GU10 lampholder, max 7.5W (lamp not included).
- Powder coated Aluminium housing.
- 3 phase track adapter.
- Available in white or black colour for the outer housing and in white, black or gold for the inner housing.
- Available with accessories: : honeycomb, linear spread lens, softening lens, spread lens.




Model	Outer Colour - Inner Colour	Type	Lamp Holder	Accessories
ADORNO TRACK Retrofit (ADORNO TRR)	(WB) White-Black (WW) White-White (WG) White-Gold (BB) Black-Black (BW) Black-White (BG) Black-Gold	(AD) Adjustable	(G1) GU10 (max 7.5W)	(0) Standard (1) Honeycomb (2) Linear Spread (3) Softening Lens (4) Spread Lens




Not included

Ordering Code Example: **ADORNO TRR-WB-AD-G1-1**





Code	Model	Colour	Lamp Holder	Maximum Consumption	Dimensions	Weight	IP	Not included
ASI.061	RIO L Square	WHITE	GU10	50W	70x70x77mm	0.40kg	IP20	 Not included



MANDI SYSTEM

Interior Spotlights 

- MANDI System trimless for ceiling application.
- High efficiency deep reflector with clear cover glass.
- Emergency version upon request
- MANDI System can be provided with track system upon request.
- 2-3 SDCM
- L90/B10 - 50.000h



LIGHTSOURCE BY
bridgelux



Model (LED Power)	Colour Temperature*	LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
MANDI 12.2W (MANDI 12)	(27B1575)	2700K - 1575lm	Adjustable	(80) 80	(20) 20° (30) 30°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1657)	3000K - 1657lm						
	(40B1706)	4000K - 1706lm						
	(57B1788)	5700K - 1788lm						
MANDI 17.1W (MANDI 17)	(27B2382)	2700K - 2382lm	Adjustable	(90) 90	(20) 20° (30) 30°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2481)	3000K - 2481lm						
	(40B2581)	4000K - 2581lm						
	(57B2705)	5700K - 2705lm						
MANDI 12.5W (MANDI 12)	(27B1313)	2700K - 1313lm	Adjustable	(97) 97	(20) 20° (30) 30°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1362)	3000K - 1362lm						
	(40B1460)	4000K - 1460lm						
MANDI 17.1W (MANDI 17)	(27B1985)	2700K - 1985lm	Adjustable	(97) 97	(20) 20° (30) 30°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B2060)	3000K - 2060lm						
	(40B2209)	4000K - 2209lm						
MANDI 12.5W (MANDI 12)	(27B1121)	2700K - 1121lm	Adjustable	(97) 97	(20) 20° (30) 30°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1196)	3000K - 1196lm						
MANDI 17.5W (MANDI 17)	(27B1660)	2700K - 1660lm	Adjustable	(97) 97	(20) 20° (30) 30°	(WH) White (BL) Black	(00) Without Driver (ND) Non-Dimmable (A1) Analogue (1-10V) (DX) DMX (DL) DALI (PB) Push Button (PC) Phase Cut (WL) Wireless **	COVER (0X) Standard (1X) Diffuser (2X) Honeycomb (XX) EXTRAS (X0) No Extras (X1) Emergency Kit
	(30B1783)	3000K - 1783lm						

* Available in 3500K, 5000K and 6500K upon request


** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example:


MANDI 12 - 40B1460 - AD - 90 - 30 - WH - ND - 10

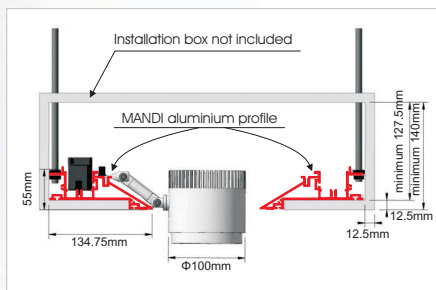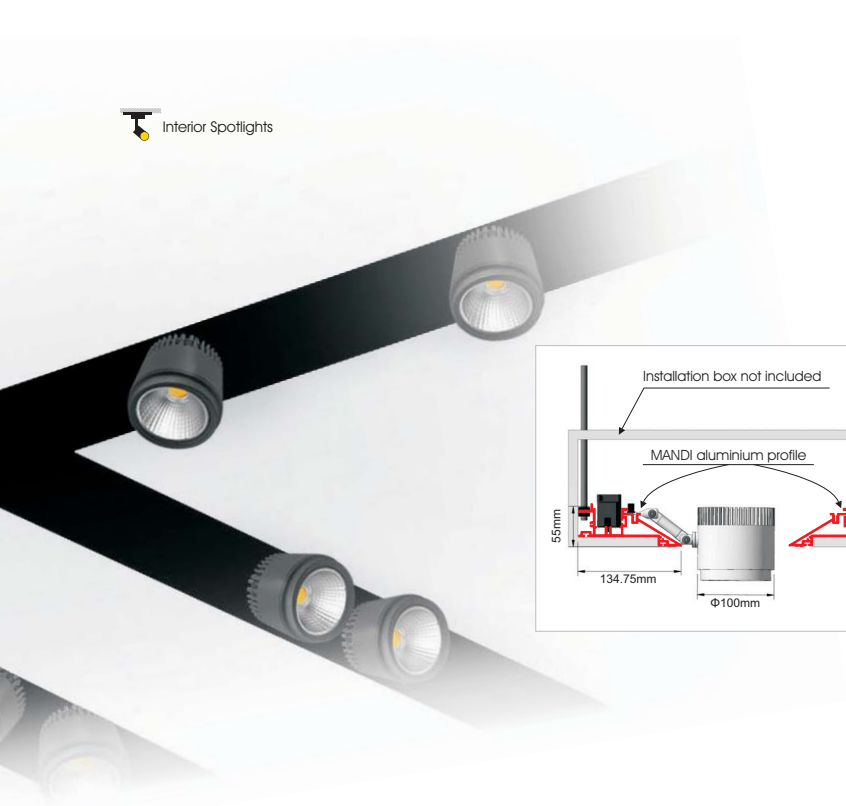



MANDI Aluminium Profile




MANDI Corner Internal Set & External Set 90° Black



MANDI Corner U Type Set Black


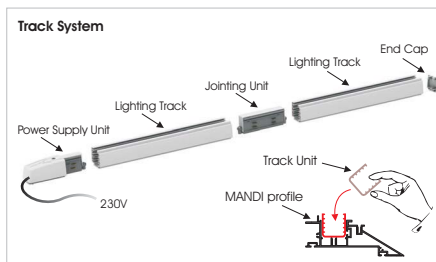


Installation box not included



MANDI aluminium profile


Installation box not included

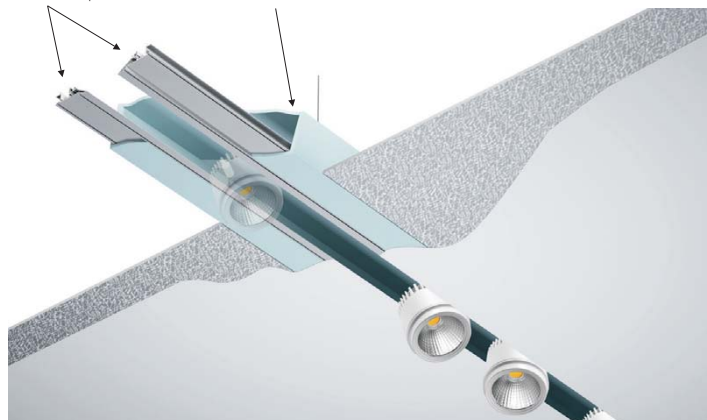

Extension Line



90° Corner Extension



MINI PROFILE T

Interior Spotlights 

- Clear cutting edge and sharp gobo image, can create projection effect.
- Lumen output: 420lm
- For indoor use only.
- Weight: 1,7 Kgs
- Ideal to use in Museums, Art Galleries, Retail shops, Hotels etc
- CREE LED
- Bluetooth dimming available upon request.




Gel media frame



Gobo holder

Code	Model	Colour Temperature	Colour Rendering	Colour	Wattage	Input Voltage	Dimming
THE.054	MINI PROFILE T	3000K	> 85	White	13W	120V-240VAC	10% up to 100%



Accessories at additional cost




Gel media frame



Gobo holder



Glare-shield



Lens barrel
LNS.050 Lens 19
LNS.051 Lens 26
LNS.052 Lens 36