



INTERIOR SYSTEMS



- CLICK IT is an elegant slim system ideal for highly demanding architectural spaces.
- It is available in surface, pendant and trimless version.
- It is offered 42V PWM Dimmable or 48V DALI Dimmable.
- It consists of different spots, pendant spots & linear ambient luminaires.



Click It **Surface** Track

Code	Model	Length	Colour
CLK.013	Click It Surface Track	2m	Black
CLK.014	Click It Surface Track	3m	Black
CLK.016	Click It Surface Track	2m	White
CLK.017	Click It Surface Track	3m	White



Click It **Trimless** Track

Code	Model	Length	Colour
CLK.001	Click It Trimless Track	2m	Black
CLK.002	Click It Trimless Track	3m	Black
CLK.004	Click It Trimless Track	2m	White
CLK.005	Click It Trimless Track	3m	White

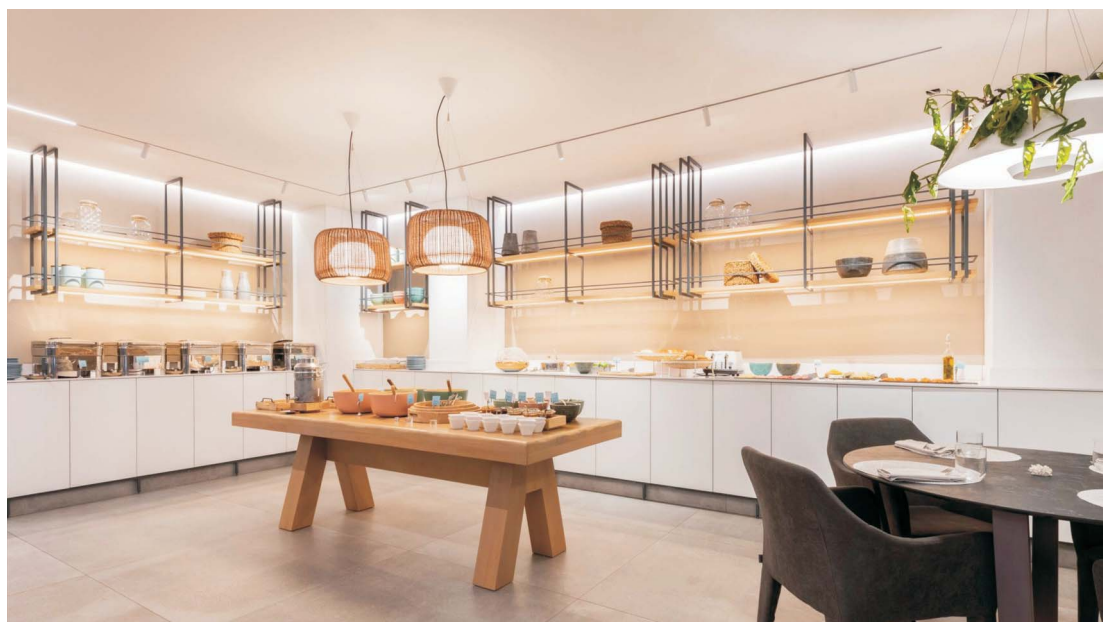


PREFABRICATED CORNERS 90° for CLICK IT System


SURFACE

Code	Description	Colour
CLK.018 CLK.021	L CORNER Surface Ceiling to Ceiling L CORNER Surface Ceiling to Ceiling	Black White
CLK.019 CLK.022	L CORNER Surface Ceiling to Wall IN L CORNER Surface Ceiling to Wall IN	Black White
CLK.020 CLK.023	L CORNER Surface Ceiling to Wall OUT L CORNER Surface Ceiling to Wall OUT	Black White


CLK.018 / CLK.021



CLK.019 / CLK.022




CLK.020 / CLK.023




TRIMLESS

Code	Description	Colour
CLK.006 CLK.009	L CORNER Trimless Ceiling to Ceiling L CORNER Trimless Ceiling to Ceiling	Black White
CLK.007 CLK.010	L CORNER Trimless Ceiling to Wall IN L CORNER Trimless Ceiling to Wall IN	Black White
CLK.008 CLK.011	L CORNER Trimless Ceiling to Wall OUT L CORNER Trimless Ceiling to Wall OUT	Black White


CLK.006 / CLK.009




CLK.007 / CLK.010




CLK.008 / CLK.011



SURFACE

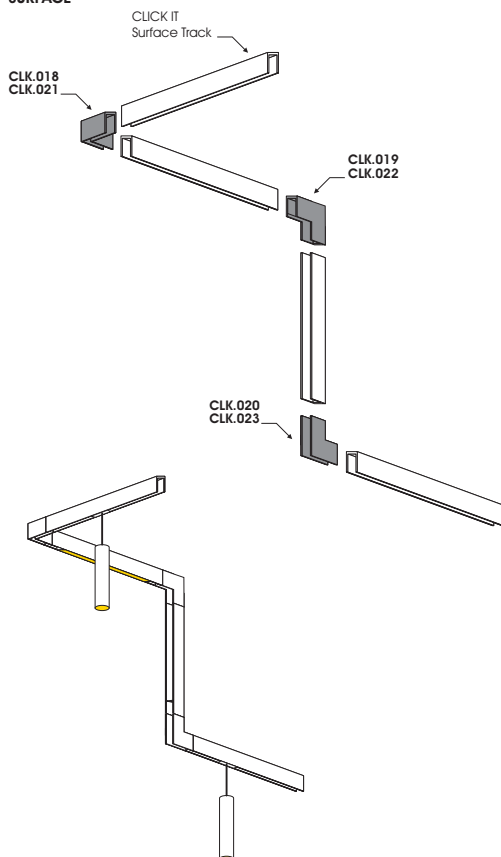


TRIMLESS

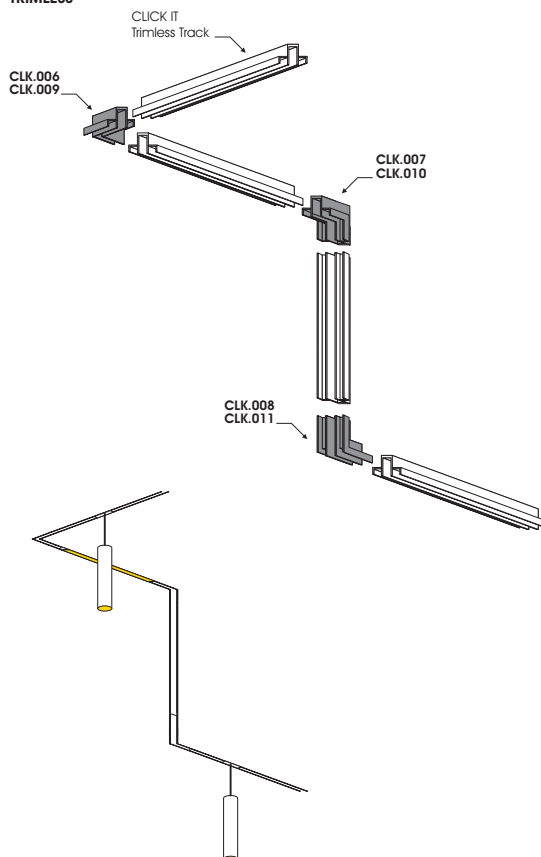


SURFACE

Code	Description	Colour
CLK.058	2x180 Connector Surface	Black
CLK.059	2x180 Connector Surface	White
CLK.045	2x90 Connector Surface	Black
CLK.054	2x90 Connector Surface	White
CLK.060	3x90 Connector Surface	Black
CLK.061	3x90 Connector Surface	White
CLK.062	4x90 Connector Surface	Black
CLK.063	4x90 Connector Surface	White
CLK.064	2x120 Connector Surface	Black
CLK.065	2x120 Connector Surface	White
CLK.068	3x60 Connector Surface	Black
CLK.069	3x60 Connector Surface	White
CLK.066	6x60 Connector Surface	Black
CLK.067	6x60 Connector Surface	White

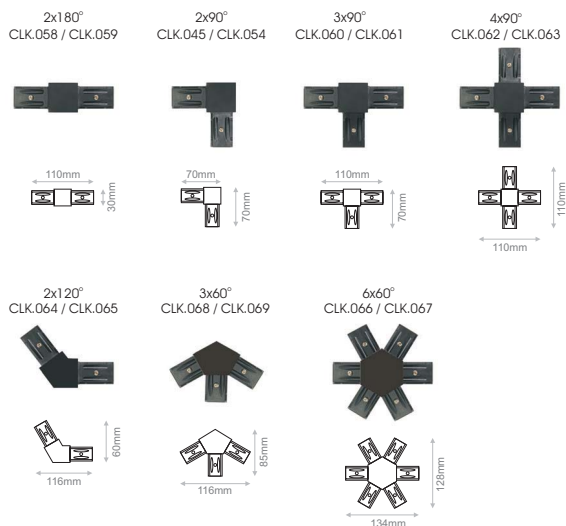

SURFACE

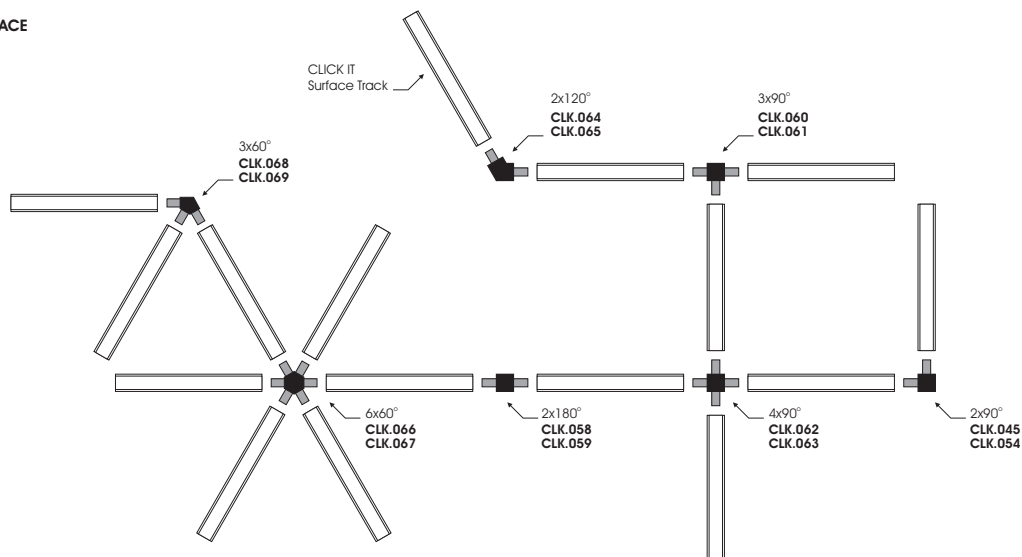

ACCESSORIES for CLICK IT System

Code	Description	Colour
------	-------------	--------

CLK.024	Live End with 1,5m cable
CLK.025	Live End with 1,5m cable
CLK.033	Live End with 0,6m cable
CLK.034	Live End with 0,6m cable

Black
White
Black
White




CLK.035	Live End no cable
CLK.036	Live End no cable

Black
White




CLK.038	Adjustable Live Connector for track
CLK.039	Adjustable Live Connector for track

Black
White



CLK.026	Driver Box L279mm
CLK.027	Driver Box L279mm

Black
White



CLK.029	Black Cover 2m
CLK.030	Black Cover 3m

Black
Black



CLK.031	End Cap Trimless & Surface
CLK.032	End Cap Trimless & Surface

Black
White



CLK.037	Extension Line Connector
----------------	--------------------------



ACC.062	Ceiling Suspension Installation 1,5m
ACC.064	Ceiling Suspension Installation 3m




- L90/B10 - 50.000h



Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CLICK IT SPOT 21W (CLICK IT S21)	(27C2147)	2700K - 2147lm	(AD) Adjustable	(80) 80	(22) 22°	(WH) White	(DM) 42V PWM Dimmable	(0) Standard
	(30C2309)	3000K - 2309lm			(35) 35°	(BL) Black	(DL) 48V DALI Dimmable	(1) Honeycomb
	(40C2471)	4000K - 2471lm			(42) 42°			(2) Line spread lens
	(50C2644)	5000K - 2644lm						(3) Softening lens
								(XX) ↑ EXTRAS (X0) No Extras (X1) Snoot Black (X2) Half Snoot Black (X3) Frosted Cover

Ordering Code Example:
CLICK IT S21-30C2309-AD-80-35-WH-DL-00

CLICK IT SPOT 21W
42V PWM Dimmable



CLICK IT SPOT 21W
48V DALI Dimmable



Honeycomb
(for 52)



Line spread lens
(for 52)



Softening lens
(for 52)




Snoot
(for 52)
also available
in white colour



Half Snoot
(for 52)
also available
in white colour



Frosted Cover
(for 52)



CLICK IT SPOT 16W

- L90/B10 - 50.000h




Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
CLICK IT SPOT 16W <i>(CLICK IT S16)</i>	(27C1453)	2700K - 1453lm	(AD) Adjustable	(80) 80	(21) 21°	(WH) White	(DM) 42V PWM Dimmable	(0) Standard
	(30C1564)	3000K - 1564lm			(32) 32°	(BL) Black	(DL) 48V DALI Dimmable	(1) Honeycomb
	(40C1564)	4000K - 1564lm			(38) 38°			(2) Line spread lens
	(50C1675)	5000K - 1675lm						(3) Softening lens
								↓ (XX) EXTRAS (X0) No Extras (X1) Snoot Black (X2) Half Snoot Black (X3) Frosted Cover


Ordering Code Example:

CLICK IT S16-30C1564-AD-80-32-WH-DL-01

CLICK IT SPOT 16W
42V PWM Dimmable



CLICK IT SPOT 16W
48V DALI Dimmable



Honeycomb
(for Φ52)



Line spread lens
(for Φ52)



Softening lens
(for Φ52)




Snoot
(for Φ52)
also available
in white colour



Half Snoot
(for Φ52)
also available
in white colour



Frosted Cover
(for Φ52)






- L90/B10 - 50.000h




Model (LED Power)	Colour Temperature	Initial LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT SPOT 7W <i>(CLICK IT S7)</i>	(27C0533)	2700K - 533lm	(AD) Adjustable	(80) 80	(27) 27°	(WH) White	(DM) 42V PWM Dimmable
	(30C0572)	3000K - 572lm			(32) 32°	(BL) Black	(DL) 48V DALI Dimmable
	(40C0614)	4000K - 614lm			(46) 46°		
	(50C0614)	5000K - 614lm					

Ordering Code Example:
CLICK IT S7-30C0572-AD-80-46-WH-DL



CLICK IT PENDANT 21W

- L90/B10 - 50.000h

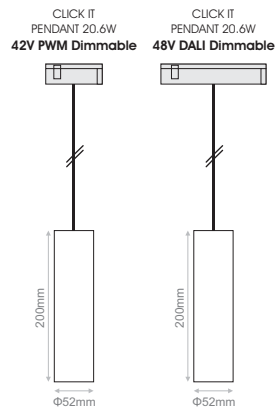

CREE LEDs

Model (LED Power)	Colour Temperature	Initial LED Lumen	CRI	Beam Angle	Colour	Dimming Option	Accessories
CLICK IT PENDANT 20.6W (CLICK IT PD21)	(27C2074)	2700K - 2074lm	(80) 80	(22) 22°	(WH) White (BL) Black	(DM) 42V PWM Dimmable (DL) 48V DALI Dimmable	(0X) Standard
	(30C2231)	3000K - 2231lm		(37) 37°			(1X) Honeycomb
	(40C2388)	4000K - 2388lm		(42) 42°			(2X) Line spread lens
	(50C2231)	5000K - 2231lm					(3X) Softening lens
							(XX) EXTRAS (X0) No Extras (X1) Shoot Black (X2) Half Shoot Black (X3) Frosted Cover

Ordering Code Example:
CLICK IT PD21-30C2231-80-37-WH-DL-00



Honeycomb
(for Ø52)



Line spread lens
(for Ø52)



Softening lens
(for Ø52)




Snoot
(for Ø52)
also available
in white colour





Half Snoot
(for Ø52)
also available
in white colour



Frosted Cover
(for Ø52)




- L90/B10 - 50.000h

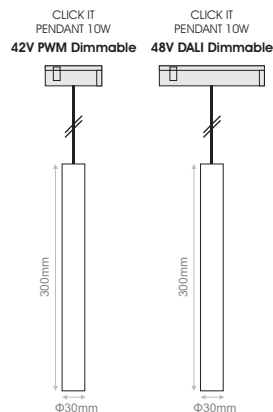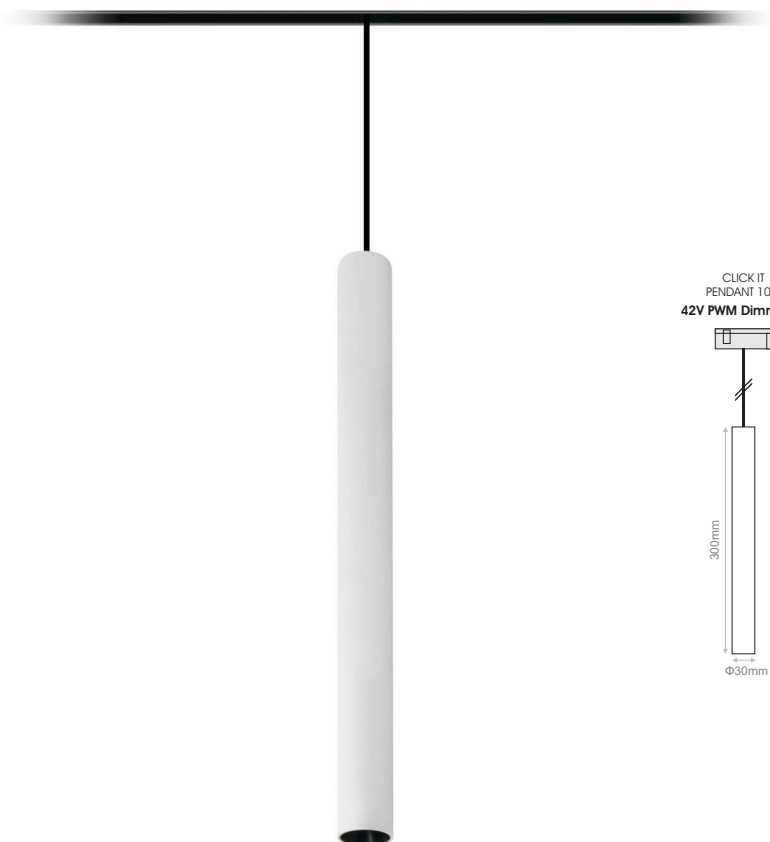

Model (LED Power)	Colour Temperature - LED Lumen	CRI	Beam Angle	Colour	Dimming Option
CLICK IT PENDANT 10W (CLICK IT PD10)	(27C0868) 2700K - 868lm	(80) 80	(27) 27°	(WH) White (BL) Black	(DM) 42V PWM Dimmable (DL) 48V DALI Dimmable
	(30C0932) 3000K - 932lm		(32) 32°		
	(40C1006) 4000K - 1006lm		(46) 46°		
	(50C1006) 5000K - 1006lm				



Ordering Code Example:
CLICK IT PD10-30C0932-80-32-WH-DL



LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 24.8W (CLICK IT A25)	(27B2715)	2700K - 2715lm	(FX) Fixed	(80) 80	(115) 115°	(BL) Black	(DM) 42V PWM Dimmable
	(30B2878)	3000K - 2878lm					(DL) 48V DALI Dimmable
	(40B3041)	4000K - 3041lm					
	(50B3041)	5000K - 3041lm					

Ordering Code Example:
CLICK IT A25-30B2878-FX-80-115-BL-DL

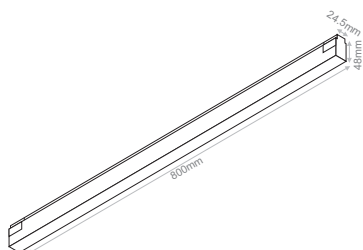




LIGHTSOURCE BY
bridgelux®

Model (LED Power)	Colour Temperature	Initial LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 12.4W <i>(CLICK IT A12)</i>	(27B1302)	2700K - 1302lm	(FX) Fixed	(80) 80	(115) 115°	(BL) Black	(DM) 42V PWM Dimmable
	(30B1381)	3000K - 1381lm					(DL) 48V DALI Dimmable
	(40B1459)	4000K - 1459lm					
	(50B1459)	5000K - 1459lm					

Ordering Code Example:
CLICK IT A12-30B1381-FX-80-115-BL-DL






LIGHTSOURCE BY
bridgelux

Model (LED Power)	Colour Temperature -	Initial LED Lumen	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 6W (CLICK IT A6)	(27B0652)	2700K - 652lm	(FX) Fixed	(80) 80	(115) 115°	(BL) Black	(DM) 42V PWM Dimmable (DL) 48V DALI Dimmable
	(30B0691)	3000K - 691lm					
	(40B0730)	4000K - 730lm					
	(50B0730)	5000K - 730lm					

Ordering Code Example:
CLICK IT A6-30B0691-FX-80-115-BL-DM





CLICK IT LINEAR SPOT 12W

- L90/B10 - 50.000h



CREE 
LEDs

Model (LED Power)	Colour Temperature -	Initial LED Lumen	CRI	Beam Angle	Colour	Dimming Option
CLICK IT LINEAR SPOT 12W (CLICK IT LS12)	(27C0903)	2700K - 903lm	(80) 80	(09) 9°	(BL) Black	(DM) 42V PWM Dimmable
	(30C0963)	3000K - 963lm		(13) 13°		(DL) 48V DALI Dimmable
	(40C1030)	4000K - 1030lm		(25) 25°		
	(50C1097)	5000K - 1097lm				

Ordering Code Example:
CLICK IT LS12-30C0963-80-25-BL-DL

