



ALUMINIUM PROFILES



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str. N.Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

Elies Resort, Halkidiki, Greece
AGARCH + ARCHITECTS

AWARD:
Best Resort
Best Landscape
Special jury award for the highest total score
Audience Award
100% Hotel DesignAwards 2015


ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 66 Antiochias St, N.Philadephia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

LINILINE RECESSED

Aluminium Profile

Aluminium Profiles 

- Uniline recessed aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Recessed

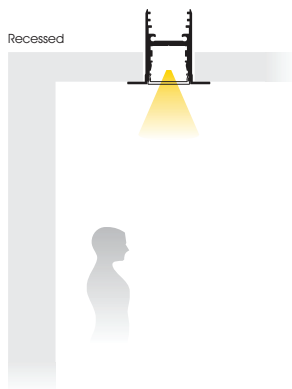






Image	Code	Description	Length	Design-Detail
	PRF.019	LINILINE RECESSED alum.prof. / Anodized 2m		
	PRF.117	SLIDING BASE alum.prof. / Anodized 2m		
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	CAP.009	END CAP ALUM.		
	PRH.042	RETENTION SPRING Note: Use 2 pcs for length up to 100cm, 3 pcs up to 150cm, 4 pcs up to 200cm		
	PRH.043 PRH.044 PRH.045 PRH.046 PRH.047 PRH.048	EXTENSION LINE EXTENSION L90° EXTENSION T EXTENSION X EXTENSION VER-I CORNER 90° EXTENSION VER-O CORNER 90°		
	PRH.049 PRH.050 PRH.051	L TYPE 90° LINILINE RECESSED T TYPE 90° LINILINE RECESSED X TYPE LINILINE RECESSED		
	PRH.052 PRH.053	VER-I CORNER 90° LINILINE RECESSED VER-O CORNER 90° LINILINE RECESSED		

LINILINE RECESSED ANTIGLARE

Aluminium Profile

Aluminium Profiles 

- Uniline recessed antiglare aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.

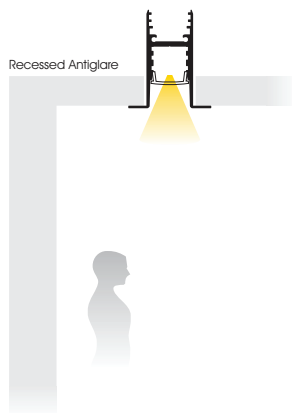








Image	Code	Description	Length	Design-Detail
	PRF.079	LINILINE RECESSED ANTIGLARE alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note: At 60° only 10mm LED strip width	2m	 
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER Note: At 70° only 10mm LED strip width	2m 2m 2m	 
	CAP.010	END CAP ALUM.		
	PRH.042	RETENTION SPRING Note: Use 2 pcs for length up to 100cm, 3 pcs up to 150cm, 4 pcs up to 200cm		
	PRH.043 PRH.044 PRH.045 PRH.046 PRH.047 PRH.048	EXTENSION LINE EXTENSION L 90° EXTENSION T EXTENSION X EXTENSION VER-I CORNER 90° EXTENSION VER-O CORNER 90°		     
	PRH.054 PRH.055 PRH.056	L TYPE 90° LINILINE RECESSED AG T TYPE 90° LINILINE RECESSED AG X TYPE LINILINE RECESSED AG		  
	PRH.057 PRH.058	VER-I CORNER 90° LINILINE RECESSED AG VER-O CORNER 90° LINILINE RECESSED AG		 

LINILINE TRIMLESS

Aluminium Profile

Aluminium Profiles 

- Uniline trimless aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).



Trimless


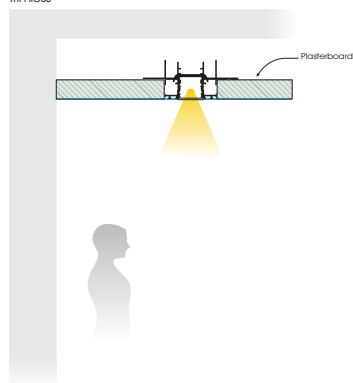








Image	Code	Description	Length	Design-Detail
	PRF.080	LINELINE TRIMLESS alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	CAP.011	END CAP ALUM.		
	PRH.043 PRH.044 PRH.045 PRH.046 PRH.047 PRH.048	EXTENSION LINE EXTENSION L90° EXTENSION T EXTENSION X EXTENSION VER-I CORNER 90° EXTENSION VER-O CORNER 90°		
	PRH.059 PRH.060 PRH.061	L TYPE 90° LINELINE TRIMLESS T TYPE 90° LINELINE TRIMLESS X TYPE LINELINE TRIMLESS		
	PRH.062 PRH.063	VER-I CORNER 90° LINELINE TRIMLESS VER-O CORNER 90° LINELINE TRIMLESS		

LINILINE TRIMLESS ANTIGLARE Aluminium Profile

Aluminium Profiles 

- Uniline trimless antiglare aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).



Trimless Antiglare

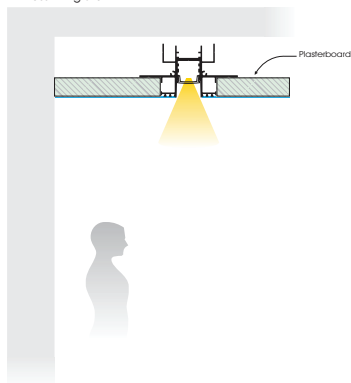





Image	Code	Description	Length	Design-Detail
	PRF.081	LINILINE TRIMLESS ANTIGLARE alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note: At 60° only 10mm LED strip width	2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER Note: At 70° only 10mm LED strip width	2m 2m 2m	
	CAP.012	END CAP ALUM.		
	PRH.043 PRH.044 PRH.045 PRH.046 PRH.047 PRH.048	EXTENSION LINE EXTENSION L90° EXTENSION T EXTENSION X EXTENSION VER-I CORNER 90° EXTENSION VER-O CORNER 90°		
	PRH.064 PRH.065 PRH.066	L TYPE 90° LINILINE TRIMLESS AG T TYPE 90° LINILINE TRIMLESS AG X TYPE LINILINE TRIMLESS AG		
	PRH.067 PRH.068	VER-I CORNER 90° LINILINE TRIMLESS AG VER-O CORNER 90° LINILINE TRIMLESS AG		

LINILINE SURFACE

Aluminium Profile

Aluminium Profiles 

- Uniline surface aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Surface

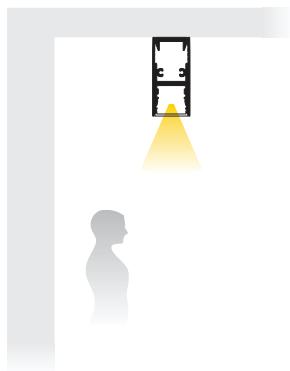



Image	Code	Description	Length	Design-Detail
	PRF.082	LINLINE SURFACE alum.prof. / Anodized 2m		
	PRF.084	LINLINE BASE alum.prof. / Anodized 2m Note: It must be cutted in pieces of 6cm. Use 2pcs up to 1m, 3pcs up to 1,5m, 4pcs up to 2m luminaire lengths		
	PRF.117	SLIDING BASE alum.prof. / Anodized 2m		
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	CAP.013 CAP.014	FRONT CAP ALUM. END CAP ALUM.		
	PRH.069	EXTENSION LINE		
	PRH.070 PRH.071 PRH.072	L TYPE 90° LINLINE SURFACE T TYPE 90° LINLINE SURFACE X TYPE LINLINE SURFACE		
	PRH.073 PRH.074	VER-I CORNER 90° LINLINE SURFACE VER-O CORNER 90° LINLINE SURFACE		

LINILINE SURFACE ANTIGLARE

Aluminium Profile

Aluminium Profiles 

- Uniline surface antiglare aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Surface Antiglare

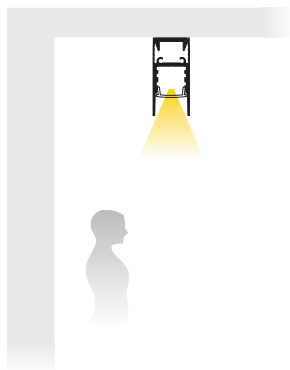







Image	Code	Description	Length	Design-Detail
	PRF083	LINLINE SURFACE ANTIGLARE alum.prof. / Anodized	2m	
	PRF084	LINLINE BASE alum.prof. / Anodized Note: It must be cutted in pieces of 6cm. Use 2pcs up to 1m, 3pcs up to 1,5m, 4pcs up to 2m luminaire lengths	2m	
	PRF117	SLIDING BASE alum.prof. / Anodized	2m	 
	COV033	PMMA LENS COVER Note: At 60° only 10mm LED strip width	2m	  CO-180° C90-270°
	COV018 COV017 COV007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER Note: At 70° only 10mm LED strip width	2m 2m 2m	  * According to sliding base position and cover type
	CAP015 CAP016	FRONT CAP ALUM. END CAP ALUM.		 
	PRH.069	EXTENSION LINE		
	PRH.075 PRH.076 PRH.077	L TYPE 90° LINLINE SURFACE-AG T TYPE 90° LINLINE SURFACE-AG X TYPE LINLINE SURFACE-AG		  
	PRH.078 PRH.079	VER-I CORNER 90° LINLINE SURFACE-AG VER-O CORNER 90° LINLINE SURFACE-AG		 

LINILINE PENDANT

Aluminium Profile

Aluminium Profiles 

- Uniline pendant aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Pendant

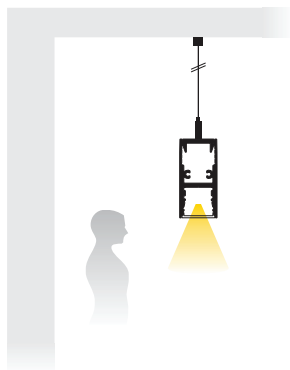



Image	Code	Description	Length	Design-Detail
	PRF.082	LINILINE PENDANT alum.prof. / Anodized	2m	
	PRF.084	LINILINE TOP COVER alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	CAP.014	END CAP ALUM.	18mm	
	ACC.191* ACC.233*	CEILING SUSPENSION 150cm CEILING SUSPENSION 300cm * Note: 2pcs needed for each luminaire		
	PRH.085	CANOPY SURFACE LIGHT GREY		
	PRH.086	CANOPY RECESSED LIGHT GREY		
	PRH.087	CANOPY TRIMLESS LIGHT GREY		
	PRH.037	CABLE RESTRAINT ON WIRE ROPE Note: 2pcs for 150cm & 3pcs for 300cm ceiling suspension		
	PRH.038	CABLE GLAND FOR LINILINE PENDANT		
	PRH.099	LINE ALIGNMENT		

LINILINE PENDANT ANTIGLARE

Aluminium Profile

Aluminium Profiles 

- Uniline pendant antiglare aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Pendant Antiglare

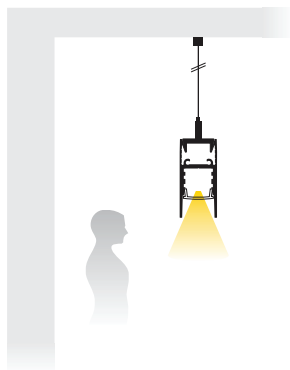




Image	Code	Description	Length	Design-Detail
	PRF.083	LINLINE PENDANT ANTIGLARE alum.prof. / Anodized	2m	
	PRF.084	LINLINE TOP COVER alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	 
	COV.033	PMMA LENS COVER Note: At 60° only 10mm LED strip width	2m	 
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER Note: At 70° only 10mm LED strip width	2m 2m 2m	   * According to sliding base position and cover type
	CAP.016	END CAP ALUM.		
	ACC.191* ACC.233*	CEILING SUSPENSION 150cm CEILING SUSPENSION 300cm * Note: 2pcs needed for each luminaire		
	PRH.085	CANOPY SURFACE LIGHT GREY		
	PRH.086	CANOPY RECESSED LIGHT GREY		
	PRH.087	CANOPY TRIMLESS LIGHT GREY		
	PRH.037	CABLE RESTRAINT ON WIRE ROPE Note: 2pcs for 150cm & 3pcs for 300cm ceiling suspension		
	PRH.038	CABLE GLAND FOR LINLINE PENDANT		
	PRH.099	LINE ALIGNMENT		

LINILINE PENDANT DIRECT/INDIRECT

Aluminium Profile

Aluminium Profiles 

- Uniline pendant DIRECT/INDIRECT aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Pendant DIRECT/INDIRECT


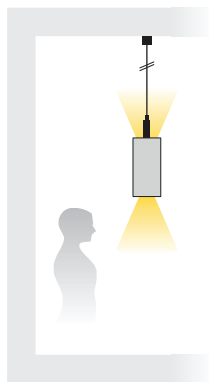





Image	Code	Description	Length	Design-Detail
	PRF.012	LINILINE PENDANT DIRECT/INDIRECT alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	 
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	 
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	  * According to sliding base position and cover type
	CAP.006	END CAP ALUM.		
	PRH.036	HANGING SET FOR LINILINE PENDANT DIRECT/INDIRECT		
	ACC.191* ACC.233*	CEILING SUSPENSION 150cm CEILING SUSPENSION 300cm * Note: 2pcs needed for each luminaire		
	PRH.085	CANOPY SURFACE LIGHT GREY		
	PRH.086	CANOPY RECESSED LIGHT GREY		
	PRH.087	CANOPY TRIMLESS LIGHT GREY		
	PRH.037	CABLE RESTRAINT ON WIRE ROPE Note: 2pcs for 150cm & 3pcs for 300cm ceiling suspension		
	PRH.038	CABLE GLAND FOR LINILINE PENDANT		

Create any possible beam angle combination, by choosing cover and sliding base position

Example:





LINILINE PENDANT DIRECT/INDIRECT ANTIGLARE

Aluminium Profile

Aluminium Profiles 

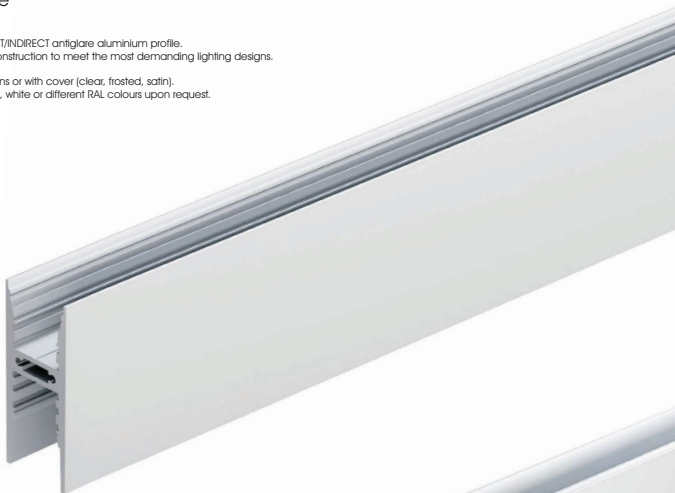- Uniline pendant DIRECT/INDIRECT antiglare aluminium profile.
- Special design and construction to meet the most demanding lighting designs.
- Variety of accessories.
- Available either with lens or with cover (clear, frosted, satin).
- Available also in black, white or different RAL colours upon request.



Pendant DIRECT/INDIRECT Antiglare


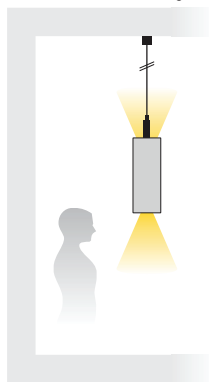







Image	Code	Description	Length	Design-Detail
	PRF.018	LINELINE PENDANT DIRECT/INDIRECT ANTIGLARE alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note: At 70° only 10mm LED strip width	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER Note: At 70° only 10mm LED strip width	2m 2m 2m	
	CAP.008	END CAP ALUM.		
	PRH.036	HANGING SET FOR LINELINE PENDANT DIRECT/INDIRECT		
	ACC.191* ACC.233*	CEILING SUSPENSION 150cm CEILING SUSPENSION 300cm * Note: 2pcs needed for each luminaire		
	PRH.085 PRH.086 PRH.087	CANOPY SURFACE LIGHT GREY CANOPY RECESSED LIGHT GREY CANOPY TRIMLESS LIGHT GREY		
	PRH.037 PRH.038	CABLE RESTRAINT ON WIRE ROPE Note: 2pcs for 150cm & 3pcs for 300cm ceiling suspension CABLE GLAND FOR LINELINE PENDANT		

Create any possible beam angle combination, by choosing cover and sliding base position

Example:



Canopy also available in black, white or different RAL colours upon request.



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias St, N.Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

Akasha Beach Hotel & Spa, Crete, Greece
schema4architects

AWARD:
BIGSEE Interior Design AWARD 2022 Winner


ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias St, N.Philadephia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

OUTLINER 50



Aluminium Profile

Aluminium Profiles 



- OUTLINER 50 aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50).
- Available also in black, white or different RAL colours upon request.




FIXED installation



SURFACE installation



WALL BRACKET (Long-Short) installation



PENDANT installation



















Image	Code	Description	Length	Design-Detail
	PRF.128	OUTLINER 50 alum.prof. / Anodized	2m	
	COV.045	POLYCARBONATE CLEAR COVER	2m	 
	COV.046	POLYCARBONATE MILKY SATIN COVER	2m	
	COV.047	POLYCARBONATE MICROPRISMATIC COVER	2m	
	CAP.135	FRONT CAP (aluminium) for OUTLINER 50		  
	CAP.136	END CAP (aluminium) for OUTLINER 50		
	PRH.008⁽¹⁾	STAINLESS STEEL HOLDER for FIXED installation		 
	PRH.011⁽¹⁾	BRACKET for SURFACE installation		 
	PRH.016⁽²⁾	WALL BRACKET LONG (pair)		 
	PRH.017⁽²⁾	WALL BRACKET SHORT (pair)		
	PRH.020	ANTISLIPPER for VERTICAL installation (use two Antislipper per luminaire)		 
	PRH.025⁽³⁾	CEILING SUSPENSION Installation 150cm (per piece)		
	PRH.026⁽³⁾	CEILING SUSPENSION Installation 300cm (per piece)		


1. Use 2 pcs for lengths up to 130cm. 3 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 130cm. 1,5 pair for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.

OUTLINER 40



Aluminium Profile

Aluminium Profiles 



- OUTLINER 40 aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50).
- Available also in black, white or different RAL colours upon request.




FIXED installation



SURFACE installation











WALL BRACKET (Long-Short) installation



PENDANT installation





Image	Code	Description	Length	Design-Detail
	PRF.125	OUTLINER 40 alum.prof. / Anodized	2m	
	COV.042	POLYCARBONATE CLEAR COVER	2m	
	COV.043	POLYCARBONATE MILKY SATIN COVER	2m	
	COV.044	POLYCARBONATE MICROPRISMATIC COVER	2m	
	CAP.131	FRONT CAP (aluminium) for OUTLINER 40		
	CAP.132	END CAP (aluminium) for OUTLINER 40		
	PRH.007 ⁽¹⁾	STAINLESS STEEL HOLDER for FIXED installation		
	PRH.010 ⁽¹⁾	BRACKET for SURFACE installation		
	PRH.014 ⁽²⁾	WALL BRACKET LONG (pair)		
	PRH.015 ⁽²⁾	WALL BRACKET SHORT (pair)		
	PRH.019	ANTISLIPPER for VERTICAL installation (Use one Antislipper per luminaire)		
	PRH.023 ⁽³⁾	CEILING SUSPENSION installation 150cm (per piece)		
	PRH.024 ⁽³⁾	CEILING SUSPENSION installation 300cm (per piece)		


1. Use 2 pcs for lengths up to 130cm. 3 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 130cm. 1,5 pair for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.

OUTLINER 30


Aluminium Profile

Aluminium Profiles 


- OUTLINER 30 aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50).
- Available also in black, white or different RAL colours upon request.




FIXED installation



SURFACE installation






WALL BRACKET (Long/Short) installation



PENDANT installation





Image	Code	Description	Length	Design-Detail
	PRF.123	OUTLINER 30 alum.prof. / Anodized	2m	
	COV.039 COV.040 COV.041	POLYCARBONATE CLEAR COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE MICROPRISMATIC COVER	2m 2m 2m	
	CAP.127 CAP.128	FRONT CAP (aluminium) for OUTLINER 30 END CAP (aluminium) for OUTLINER 30		
	PRH.006 ⁽¹⁾	STAINLESS STEEL HOLDER for FIXED installation		
	PRH.009 ⁽¹⁾	BRACKET for SURFACE installation		
	PRH.012 ⁽²⁾ PRH.013 ⁽²⁾	WALL BRACKET LONG (pair) WALL BRACKET SHORT (pair)		
	PRH.021 ⁽³⁾ PRH.022 ⁽³⁾	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 130cm, 3 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 130cm, 1.5 pair for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.

OUTLINER 20



Aluminium Profile

Aluminium Profiles 


- OUTLINER 20 aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Special design and construction to meet the most demanding lighting designs.
- Multiple mounting options.
- Family member of OUTLINER Series, with variety of luminous area widths (20,30,40,50).
- Available also in black, white or different RAL colours upon request.





FIXED Installation



SURFACE Installation



WALL BRACKET (Long-Short) Installation

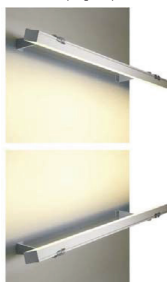

PENDANT Installation









Image	Code	Description	Length	Design-Detail
	PRF.119	OUTLINER 20 alum.prof. / Anodized	2m	
	COV.035 COV.036 COV.037	POLYCARBONATE CLEAR COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE MICROPRISMATIC COVER	2m 2m 2m	
	CAP.123 CAP.124	FRONT CAP (aluminium) for OUTLINER 20 END CAP (aluminium) for OUTLINER 20		
	ELA.008 ^(1,4)	STAINLESS STEEL HOLDER for FIXED installation		
	ACC.048 ⁽¹⁾	BRACKET for SURFACE installation		
	ACC.284 ⁽²⁾ ACC.285 ⁽²⁾	WALL BRACKET LONG (pair) for OUTLINER 20 WALL BRACKET SHORT (pair) for OUTLINER 20		
	ACC.286 ⁽³⁾ ACC.287 ⁽³⁾	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 100cm. 3 pcs for lengths up to 150cm. 4 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 100cm. 1,5 pair for lengths up to 150cm. 2 pairs for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.
4. ELA.008 can be used also as antislipper for vertical installation. Two ELA.008 must be used for every holding, required for the luminaire installation.

River West Gateway, Athens, Greece
Lighting Design: Marina Mavrikou
Photo: Gavril Papadimitriou



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

TETRA SLICK


Aluminium Profile

Aluminium Profiles 

- TETRA SLICK aluminium profile system ideal for linear LED lighting applications.
- Accessories for surface and pendant applications.
- Variety of accessories for different corner and line extensions.
- Available also in black, white or different RAL colours upon request.



SURFACE



PENDANT







Image	Code	Description	Length	Design-Detail
	PRF.130	TETRA SLICK alum.prof. / Anodized	2m	
	PRF.030	DUAL BAND SLIDING BASE	2m	
	ELA.016	ALUMINIUM SLIDING BASE (Thickness 2mm)	2m	
	COV.008 COV.009 COV.020	PMMA SATIN COVER PMMA CLEAR COVER PMMA MICROPRISMATIC COVER	2m 2m 2m	
	CAP.092	END CAP		
	ACC.062 ACC.064	CEILING SUSPENSION INSTALLATION 150cm CEILING SUSPENSION INSTALLATION 300cm		
	ACC.070	HINGE		
	ACC.083	ECO BRACKET		
	ACC.074	180 DEGREE BRACKET		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION		
	ACC.058	60° CORNER EXTENSION		
	ACC.059	45° CORNER EXTENSION		



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str. N.Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

- TETRA aluminium profile system ideal for linear LED lighting applications.
- Accessories for surface, semi recessed, recessed, trimless and pendant applications.
- Variety of accessories for different corner and line extensions.
- Special design and construction to meet the most demanding lighting designs.
- Available also in black, white or different RAL colours upon request.















Image	Code	Description	Length	Design-Detail
	PRF.026 PRF.027	TETRA alum.prof. / Anodized TETRA alum.prof. / Non-Anodized	2m 2m	
	PRF.028 PRF.029	ANGLE alum.prof. / Anodized ANGLE alum.prof. / Non-Anodized	2m 2m	
	PRF.030	DUAL BAND SLIDING BASE	2m	
	ELA.016	ALUMINIUM SLIDING BASE (Thickness 2mm)	2m	
	COV.008	PMMA SATIN COVER	2m	
	COV.009	PMMA CLEAR COVER	2m	
	COV.020	PMMA MICROPRISMATIC COVER	2m	
	CAP.092	END CAP		
	CAP.051	RECESSED END CAP		
	CAP.052	SEMI RECESSED END CAP		
	ACC.071	RETAINING SPRING		

Image	Code	Description	Design-Detail
	ACC.069	PERFORATED HOLDER FOR PLASTERBOARD	
	ACC.068	CEILING SURFACE HOLDER	
	ACC.062 ACC.064	CEILING SUSPENSION INSTALLATION 150cm CEILING SUSPENSION INSTALLATION 300cm	
	ACC.070	HINGE	
	ACC.083	ECO BRACKET	
	ACC.074	180 DEGREE BRACKET	
	ACC.056	EXTENSION LINE	
	ACC.057	90° CORNER EXTENSION	
	ACC.058	60° CORNER EXTENSION	
	ACC.059	45° CORNER EXTENSION	






Private Residence, Athens, Greece
Tense Architecture Network

3rd Winner of the H user
prize as the best family residence in Europe

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr


- TETRA PLUS aluminium profile system ideal for linear LED lighting applications.
- Accessories for recessed, surface with hinge, surface, trimless and pendant applications.
- Variety of accessories for different corner and line extensions.
- Available also in black, white or different RAL colours upon request.




RECESSED



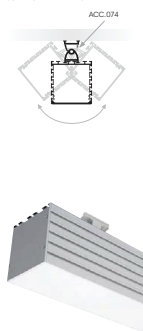SURFACE WITH HINGE



SURFACE



TRIMLESS



PENDANT













Image	Code	Description	Length	Design-Detail
	PRF041 PRF042	TETRA PLUS alum.prof. / Anodized TETRA PLUS alum.prof. / Non-Anodized	2m 2m	
	PRF028 PRF029	ANGLE alum.prof. / Anodized ANGLE alum.prof. / Non-Anodized	2m 2m	
	PRF047	SLIDING BASE 3-BANK	2m	
	PRF048	INNER HOLDERS	2m	
	PRF044	SLIDING BASE 3-BANK INNER	2m	
	PRF046	ALUMINIUM COVER / Non-Anodized	2m	
	COV012	POLYCARBONATE SATIN COVER	2m	
	CAP074	END CAP		
	CAP081	RECESSED END CAP		


Image	Code	Description	Design-Detail
	ACC.076	RECESSED HOLDER	
	ACC.069	PERFORATED HOLDER FOR PLASTERBOARD	
	ACC.062 ACC.064	CEILING SUSPENSION INSTALLATION 150cm CEILING SUSPENSION INSTALLATION 300cm	
	ACC.083	ECO BRACKET	
	ACC.074	180 DEGREE BRACKET	
	ACC.056	EXTENSION LINE	
	ACC.057	90° CORNER EXTENSION	
	ACC.058	60° CORNER EXTENSION	
	ACC.059	45° CORNER EXTENSION	

LUMINET


Aluminium Profile

Aluminium Profiles 


- LUMINET aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Special design and construction to meet the most demanding lighting designs.
- Variety of beam angles.
- Multiple mounting options.
- Ideal for wall washing.
- Up to 12mm LED strip width (up to 10mm, at 70°).
- Available also in black, white or different RAL colours upon request.



FIXED Installation




CEILING SUSPENSION Installation



SURFACE ADJUSTABLE Installation



WALL BRACKET Installation



SURFACE ADJUSTABLE Installation








Image	Code	Description	Length	Design-Detail
	PRF.116	LUMINET alum.prof. / Anodized	2m	
	PRF.117	SLIDING BASE alum.prof. / Anodized	2m	
	COV.033	PMMA LENS COVER Note 1: At 70° only 10mm LED strip width Note 2: Ideal for monochromatic LED strip	2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	CAP.115 CAR.116	FRONT CAP (aluminum) for LUMINET with COV.033 END CAP (aluminum) for LUMINET with COV.033		
	CAP.117 CAR.118	FRONT CAP (aluminum) for LUMINET with COV.018-017-007 END CAP (aluminum) for LUMINET with COV.018-017-007		
	CAP.119 CAR.120	FRONT CAP (aluminum) for LUMINET with COV.023-024-025-026-038 END CAP (aluminum) for LUMINET with COV.023-024-025-026-038		
	ACC.280	HINGE for SURFACE ADJUSTABLE installation (pair) (adjustable without tools)		
	ACC.281 ACC.282	WALL BRACKET 10cm (pair) WALL BRACKET 5cm (pair)		
	ACC.283	EXTENSION LINE for LUMINET		
	ACC.106 ACC.107	CEILING SUSPENSION INSTALLATION 150cm (per piece) CEILING SUSPENSION INSTALLATION 300cm (per piece)		
	PRH.001	HOLDER		

LIGUA 1

Aluminium Profile

Aluminium Profiles 

- LIGUA 1 aluminium profile is ideal for linear decorative wall application.
- Possibility of creating 90° vertical or 90° horizontal.
- Special design and construction to meet the most demanding lighting designs.
- Available also in black, white or different RAL colours upon request.

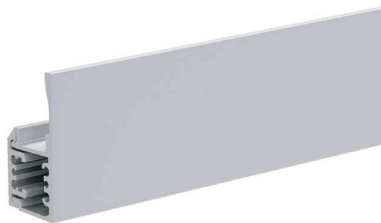







Image	Code	Description	Length	Design-Detail
	PRF.097	LIGUA 1 alum.prof. / Anodized	2m	
	PRF.098	LIGUA 1 mounting alum.prof. / Anodized	2m	
	COV.018	POLYCARBONATE CLEAR COVER	2m	
	COV.017	POLYCARBONATE OPAL COVER	2m	
	COV.007	PMMA FROSTED COVER	2m	
	CAP.111 CAP.112	FRONT CAP for LIGUA 1 END CAP for LIGUA 1		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION for PRF.099 and PRF.100		
	ACC.105	90° CORNER EXTENSION for PRF.101 and PRF.102		
PREFABRICATED CORNERS 90° FOR LIGUA 1				
	PRF.099	VERTICAL-O		
	PRF.100	VERTICAL-I		
	PRF.101	HORIZONTAL-N		
	PRF.102	HORIZONTAL-I		

- LIGUA 2 aluminium profile is ideal for linear decorative wall application.
- Possibility of creating 90° vertical or 90° horizontal.
- Special design and construction to meet the most demanding lighting designs.
- Available also in black, white or different RAL colours upon request.








Image	Code	Description	Length	Design-Detail
	PRF.103	LIGUA 2 alum.prof. / Anodized	2m	
	PRF.104	LIGUA 2 mounting alum.prof. / Anodized	2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP.113 CAP.114	FRONT CAP for LIGUA 2 END CAP for LIGUA 2	60mm 60mm	
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION for PRF.108		
	ACC.105	90° CORNER EXTENSION for PRF.109 and PRF.110		
	PRF.108 PRF.109 PRF.110	VERTICAL HORIZONTAL-N HORIZONTAL-I		


**Custom lengths available for LIGUA 2 for 90° vertical or 90° horizontal installations

LINART


Aluminium Profile

Aluminium Profiles 

- LINART aluminium profile system ideal for linear LED lighting applications.
- For ceiling and wall installations.
- Variety of accessories for different corner and line extensions.
- Special design and construction to meet the most demanding lighting designs.
- Available also in black, white or different RAL colours upon request.



LINART C
(Ceiling)





LINART W
(Wall)

LINART C
(Ceiling)

LINART W
(Wall)

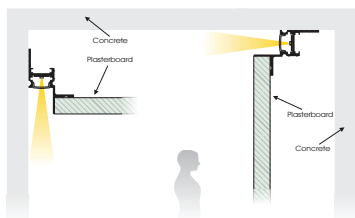LINART C (Ceiling)



LINART W (Wall)


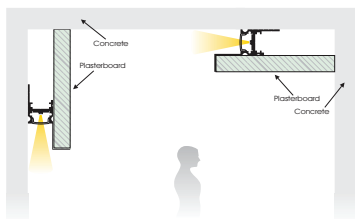











Image	Code	Description	Length	Design-Detail
	PRF.077	LINART C alum.prof. / Anodized	2m	
	PRF.078	LINART W alum.prof. / Anodized	2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP.107	FRONT CAP for PRF.077/078		
	CAP.108	END CAP for PRF.077/078		
	ACC.101	EXTENSION LINE		
	ACC.102	90° CORNER HORIZONTAL EXTENSION		
	ACC.103	90° CORNER VERTICAL EXTENSION for PRF.088/092		
	ACC.104	90° CORNER VERTICAL EXTENSION for PRF.089/093		

PREFABRICATED CORNERS 90° FOR LINART C (Ceiling)





PREFABRICATED CORNERS 90° FOR LINART W (Wall)

Male Connectors
(with 1.5cm cables)

Female connectors
(with 30cm cables)


Mini Junction Boxes
For all available models of mini junction boxes, which can be used with Linart series, please refer to "Cables/ Connectors" section of the catalogue contents.

- JOY aluminium profile with satin square or satin round cover.
- Accessories for pendant installation.
- Available also in black, white or different RAL colours upon request.






Image	Code	Description	Length	Design-Detail
	PRF.036 PRF.037	JOY alum.prof. / Anodized JOY alum.prof. / Non-Anodized	2m 2m	
	COV.010	PMMA OPAL SQUARE COVER	2m	
	COV.011	PMMA OPAL ROUND COVER	2m	
	ELA.018	ALUMINIUM SLIDING BASE	2m	
	CAP.083 CAP.082	FRONT CAP for JOY with COV.010 END CAP for JOY with COV.010		
	CAP.085 CAP.084	FRONT CAP for JOY with COV.011 END CAP for JOY with COV.011		
	ELA.008	STAINLESS STEEL HOLDER		
	ACC.063 ACC.065	CEILING SUSPENSION INSTALLATION 150cm CEILING SUSPENSION INSTALLATION 300cm		



- U TYPE aluminium profile system ideal for linear LED lighting applications.
- Accessories for surface and pendant installations.
- Variety of accessories for different corner and line extensions.
- Available also in black, white or different RAL colours upon request.



Image	Code	Description	Length	Design-Detail
	PRF022 PRF023	U TYPE alum.prof. / Anodized U TYPE alum.prof. / Non-Anodized	2m 2m	
	COV023 COV024 COV025 COV026 COV038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV018 COV017 COV007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP078 CAP077	FRONT CAP for U TYPE with COV023-024-025-026-038 END CAP for U TYPE with COV023-024-025-026-038		
	CAP080 CAP079	FRONT CAP for U TYPE with COV017-018-007 END CAP for U TYPE with COV017-018-007		
	PRH.001	HOLDER		
	ACC.062 ACC.064	CEILING SUSPENSION INSTALLATION 150cm CEILING SUSPENSION INSTALLATION 300cm		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION		
	ACC.058	60° CORNER EXTENSION		
	ACC.059	45° CORNER EXTENSION		

ELECSIA

Aluminium Profile

Aluminium Profiles 

- ELECSIA aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Multiple mounting options.
- Available also in black, white or different RAL colours upon request.




FIXED installation




SURFACE A installation




SURFACE B installation



SURFACE C installation



WALL BRACKET installation



PENDANT installation









Image	Code	Description	Length	Design-Detail
	PRF.118	ELECSIA alum.prof. / Anodized	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA SATIN COVER	2m 2m 2m	
	CAP.121 CAP.122	FRONT CAP (aluminium) for ELECSIA END CAP (aluminium) for ELECSIA		
	ELA.008 ¹⁻⁴	STAINLESS STEEL HOLDER		
	ACC.289 ²	HINGE for SURFACE A installation (pair) for ELECSIA (adjustable without tools)		
	ACC.290 ²	HINGE for SURFACE B installation (pair) for ELECSIA (adjustable without tools)		
	ACC.048 ¹	BRACKET for SURFACE C installation		
	ACC.284 ² ACC.285 ²	WALL BRACKET LONG (pair) for ELECSIA WALL BRACKET SHORT (pair) for ELECSIA		
	ACC.286 ³ ACC.287 ³	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 110cm. 3 pcs for lengths up to 170cm. 4 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 110cm. 1.5 pair for lengths up to 170cm. 2 pairs for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.
4. ELA.008 can be used also as antislipper for vertical installation. Two ELA.008 must be used for every holding, required for the luminaire installation.

OMEGA

Aluminium Profile

Aluminium Profiles 

- OMEGA aluminium profile system ideal for linear LED lighting applications.
- Available in milky, milky satin, ruled or transparent cover.
- Variety of accessories for different corner and line extensions.
- Available also in black, white or different RAL colours upon request.





Image	Code	Description	Length	Design-Detail
	PRF.024 PRF.025	OMEGA alum.prof. / Anodized OMEGA alum.prof. / Non-Anodized	2m 2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	CAR049	END CAP		
	ACC.055	RETAINING SPRING		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION		
	ACC.058	60° CORNER EXTENSION		
	ACC.059	45° CORNER EXTENSION		

- LUNGO aluminium profile system ideal for linear LED lighting applications.
- Variety of accessories for different corner and line extensions.
- Special design and construction to meet the most demanding lighting designs.






Image	Code	Description	Length	Design-Detail
	PRF.096	LUNGO alum.prof. / Anodized	2m	
	COV.004	PMMA CLEAR COVER	2m	
	COV.005	PMMA FROSTED COVER	2m	
	COV.006	PMMA SATIN COVER	2m	
	CAP.109	FRONT CAP for LUNGO		
	CAP.110	END CAP for LUNGO		
	ACC.101	EXTENSION LINE for LUNGO		
	ACC.102	90° CORNER HORIZONTAL EXTENSION for PRF.113		
	ACC.103	90° CORNER VERTICAL EXTENSION for PRF.111		
	ACC.104	90° CORNER VERTICAL EXTENSION for PRF.112		

PREFABRICATED CORNERS 90° FOR LUNGO



Male Connectors
(with 15cm cables)



Female connectors
(with 30cm cables)



Mini Junction Boxes

For all available models of mini junction boxes, which can be used with Linat series, please refer to "Cables/ Connectors" section of the catalogue contents.

MIDI U

Aluminium Profile



- MIDI U aluminium profile is a linear profile for surface installation.
- Available also in black, white or different RAL colours upon request.




Image	Code	Description	Length	Design-Detail
	PRF014 PRF015	MIDI U alum.prof. / Anodized MIDI U alum.prof. / Non-Anodized	2m 2m	
	COV023 COV024 COV025 COV026 COV038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV018 COV017 COV007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP061 CAP060	FRONT CAP for MIDI U with COV.023-024-025-026-038 END CAP for MIDI U with COV.023-024-025-026-038		
	CAP072 CAP071	FRONT CAP for MIDI U with COV.017-018-007 END CAP for MIDI U with COV.017-018-007		
	PRH.001	HOLDER		



- MIDI U Recessed aluminium profile for linear LED lighting.
- Available also in black, white or different RAL colours upon request.



Image	Code	Description	Length	Design-Detail
	PRF.134	MIDI U RECESSED alum.prof. / Anodized	2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	CAP.143	END CAP for MIDI U RECESSED with COV.023-024-025-026-038		

MINI U

Aluminium Profile



- MINI U aluminium profile has extra low depth and is suitable for surface installation.
- Available also in black, white or different RAL colours upon request.




Image	Code	Description	Length	Design-Detail
	PRF.132	MINI U alum.prof. / Anodized	2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	CAP.141	END CAP for MINI U with COV.023-024-025-026-038		
	PRH.001	HOLDER		

- MINI U RECESSED aluminium profile has extra low depth and is ideal for furniture.
- Available also in black, white or different RAL colours upon request.






Image	Code	Description	Length	Design-Detail
	PRF.133	MINI U RECESSED alum.prof. / Anodized	2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	CAP.142	END CAP for MINI U RECESSED with COV.023-024-025-026-038		
	PRH.001	HOLDER		


- ELITE aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Multiple mounting options.
- Suitable for waterproof LED strips up to 15mm width.
- Available also in black, white or different RAL colours upon request.



FIXED installation



SURFACE installation





WALL BRACKET (Long-Short) installation



PENDANT installation





Suitable for waterproof LED strips up to 15mm width.


Image	Code	Description	Length	Design-Detail
	PRF.135	ELITE alum.prof. / Anodized	2m	
	COV.035 COV.036 COV.037	POLYCARBONATE CLEAR COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE MICROPRISMATIC COVER	2m 2m 2m	
	CAP.144	END CAP		
	ELA.008 ^(1,4)	STAINLESS STEEL HOLDER for FIXED installation		
	ACC.048 ⁽¹⁾	BRACKET for SURFACE installation		
	ACC.284 ⁽²⁾ ACC.285 ⁽²⁾	WALL BRACKET LONG (pair) WALL BRACKET SHORT (pair)		
	ACC.286 ⁽³⁾ ACC.287 ⁽³⁾	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 100cm. 3 pcs for lengths up to 150cm. 4 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 100cm. 1,5 pair for lengths up to 150cm. 2 pairs for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.
4. ELA.008 can be used also as antislipper for vertical installation. Two ELA.008 must be used for every holding, required for the luminaire installation.

- ELECSYS aluminium profile available with different covers: Transparent ,Ruled and Milky.



Image	Code	Description	Length	Design-Detail
	ELA.001	ELECSYS alum.prof. / Anodized	2m	
	ELA.002	POLYCARBONATE CLEAR COVER	2m	
	ELA.003	POLYCARBONATE RULED COVER	2m	
	ELA.004	POLYCARBONATE MILKY COVER	2m	
	ELA.006	BIG END CAP for ELECSYS with ELA.002-003-004		
	ELA.007	SMALL END CAP		
	ELA.008	STAINLESS STEEL HOLDER		
	ACC.048	BRACKET		



- SHALLOW aluminium profile ideal solution for low depth applications.
- Available with transparent, milky, milky satin or ruled cover.




Image	Code	Description	Length	Design-Detail
	PRF.010 PRF.011	SHALLOW alum.prof. / Anodized SHALLOW alum.prof. / Non-Anodized	2m 2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP.036 CAP.035	FRONT CAP for SHALLOW with COV.023-024-025-026-038 END CAP for SHALLOW with COV.023-024-025-026-038		
	CAP.068 CAP.067	FRONT CAP for SHALLOW with COV.017-018-007 END CAP for SHALLOW with COV.017-018-007		
	PRH.001	HOLDER		



BENDABLE

Aluminium Profile


Aluminium Profiles 

- BENDABLE aluminium profile ideal for curved LED lighting applications.
- Special design and construction to meet demanding lighting designs.



Image	Code	Description	Length	Design-Detail
	PRF.076	BENDABLE alum.prof. / Anodized	2m	
	COV.031	POLYCARBONATE MILKY COVER	2m	
	COV.032	POLYCARBONATE CLEAR COVER	2m	
	CAP.105	END CAP for BENDABLE		
	CAP.106	FRONT CAP for BENDABLE		
	PRH.003	HOLDER clips		

FRAGILE
Only Bend Vertically
Do not bend smaller than
allowed minimum bend diameter.



- TINY aluminium profile is the thinner available aluminium profile.



Image	Code	Description	Length	Design-Detail
	PRF.056	TINY alum.prof. / Anodized	2m	
	COV.013 COV.014	POLYCARBONATE ORAL COVER POLYCARBONATE CLEAR COVER	2m 2m	
	CAP.146	END CAP for TINY	2m	
	ACC.158	3M ADHESIVE TAPE FOR TINY PROFILE	1m	

NEST XL

Aluminium Profile

Aluminium Profiles 


- NEST XL aluminium profile ideal for linear LED lighting applications.
- Variety of accessories.
- Multiple mounting options.
- Ideal for waterproof LED strips up to 15mm width.



FIXED installation



SURFACE installation





WALL BRACKET (Long-Short) installation



PENDANT installation



Ideal for waterproof LED strips up to 15mm width.

Image	Code	Description	Length	Design-Detail
	PRF.136	NEST XL alum.prof. / Anodized	2m	
	ELA.008 ^(1,4)	STAINLESS STEEL HOLDER for FIXED installation		
	ACC.048 ⁽¹⁾	BRACKET for SURFACE installation		
	ACC.284 ⁽²⁾ ACC.285 ⁽²⁾	WALL BRACKET LONG (pair) WALL BRACKET SHORT (pair)		
	ACC.286 ⁽³⁾ ACC.287 ⁽³⁾	CEILING SUSPENSION installation 150cm (per piece) CEILING SUSPENSION installation 300cm (per piece)		

1. Use 2 pcs for lengths up to 110cm. 3 pcs for lengths up to 170cm. 4 pcs for lengths up to 200cm.
2. Use 1 pair for lengths up to 110cm. 1,5 pair for lengths up to 170cm. 2 pairs for lengths up to 200cm.
3. Use 2 pcs for lengths up to 200cm.
4. ELA.008 can be used also as antislipper for vertical installation. Two ELA.008 must be used for every holding, required for the luminaire installation.

- NEST aluminium profile is the perfect solution for waterproof strips due to its special construction.
- It ensures a safe installation that does not allow the strip to fall over.



Image	Code	Description	Length	Design-Detail
	PRF043	NEST alum.prof. / Anodized	2m	
	PRH.001	HOLDER		

- CORNISE aluminium profile ideal for cove & frame lighting.
- Suitable for use on walls or ceilings.
- Special design for homogeneous lighting.
- Available also in RAL colours upon request.





Image	Code	Description	Length	Design-Detail
	PRF.057 PRFW057	CORNISE alum.prof. / Anodized CORNISE alum.prof. / White painted	2m 2m	
	PRF.058	BASE PROFILE	2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP095 CAPW095	END CAP / Anodized END CAP / White painted		

ARC

Aluminium Profile

Aluminium Profiles 

- ARC aluminium profile ideal for concealed lighting.
- Gives depth into a space.
- Available with transparent, milky, milky satin or ruled cover.
- Available also in RAL colours upon request.



Recessed



PRF.029
PRFW029

PRF.029
PRFW029



Trimless



ACC.069



ACC.069





ARC Recessed



ARC Trimless




Image	Code	Description	Length	Design-Detail
	PRF038 PRFW038	ARC alum.prof. / Non-Anodized ARC alum.prof. / White Painted	2m 2m	
	PRF029 PRFW029	ANGLE alum.prof. / Non-Anodized ANGLE alum.prof. / White Painted	2m 2m	
	COV023 COV024 COV025 COV026 COV038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV018 COV017 COV007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP062 CAPW062	END CAP / Non-Anodized END CAP / White Painted		
	CAP063 CAPW063	RECESSED END CAP / Non-Anodized RECESSED END CAP / White Painted		
	CAP069	BASE CAP		
	ACC.069	PERFORATED HOLDER FOR PLASTERBOARD		
	ACC.071	RETAINING SPRING		
	ACC.056 ACC.057 ACC.058 ACC.059	EXTENSION LINE 90° CORNER EXTENSION 60° CORNER EXTENSION 45° CORNER EXTENSION		

ARC 2

Aluminium Profile

Aluminium Profiles 



- ARC 2 aluminium profile with double strip installation.
- Gives depth into a space.
- Available with transparent, milky, milky satin or ruled cover.
- Available also in RAL colours upon request.



Recessed



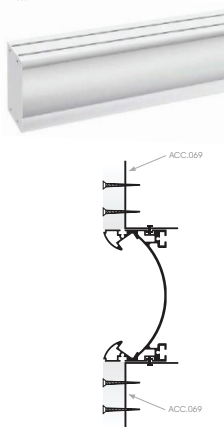Trimless



ARC 2 Recessed



ARC 2 Trimless



Image	Code	Description	Length	Design-Detail
	PRF039 PRFW039	ARC2 alum.prof. / Non-Anodized ARC2 alum.prof. / White Painted	2m 2m	
	PRF029 PRFW029	ANGLE alum.prof. / Non-Anodized ANGLE alum.prof. / White Painted	2m 2m	
	COV023 COV024 COV025 COV026 COV038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV018 COV017 COV007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP064 CAPW064	END CAP / Non-Anodized END CAP / White Painted		
	CAP065 CAPW065	RECESSED END CAP / Non-Anodized RECESSED END CAP / White Painted		
	CAP070	BASE CAP		
	ACC.069	PERFORATED HOLDER FOR PLASTERBOARD		
	ACC.071	RETAINING SPRING		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION		
	ACC.058	60° CORNER EXTENSION		
	ACC.059	45° CORNER EXTENSION		

ARC 3

Aluminium Profile

Aluminium Profiles 

- ARC3 aluminium profile ideal for concealed lighting.
- Gives depth into a space.
- Available with transparent, milky, milky satin or ruled cover.
- Available also in RAL colours upon request.







Image	Code	Description	Length	Design-Detail
	PRF.051	ARC3 alum.prof. / Non-Anodized	2m	
	PRFW051	ARC3 alum.prof. / White Painted	2m	
	COV.023	POLYCARBONATE MILKY COVER	2m	
	COV.024	POLYCARBONATE MILKY SATIN COVER	2m	
	COV.025	POLYCARBONATE RULED COVER	2m	
	COV.026	POLYCARBONATE CLEAR COVER	2m	
	COV.038	POLYCARBONATE BLACK SATIN COVER	2m	
	COV.018	POLYCARBONATE CLEAR COVER	2m	
	COV.017	POLYCARBONATE OPAL COVER	2m	
	COV.007	PMMA FROSTED COVER	2m	
	CAP093	END CAP / Non-Anodized		
	CAPW093	END CAP / White Painted		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION		
	ACC.058	60° CORNER EXTENSION		
	ACC.059	45° CORNER EXTENSION		





ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antichias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

- INGRA aluminium profile with milky or transparent cover.
- Special design and construction to meet the most demanding lighting designs.





Image	Code	Description	Length	Design-Detail
	PRF.013	INGRA alum.prof. / Non-Anodized	2m	
	COV.021	POLYCARBONATE MILKY COVER	2m	
	COV.029	POLYCARBONATE CLEAR COVER	2m	
	CAP.073	END CAP		
	ELA.008	STAINLESS STEEL HOLDER		



- INGRA MINI aluminium profile with milky or transparent cover.
- Special design and construction to meet the most demanding lighting designs.





Image	Code	Description	Length	Design-Detail
	PRF.114	INGRA MINI alum.prof. / Anodized	2m	
	PRF.040	INGRA MINI alum.prof. / Non-Anodized	2m	
	COV.021	POLYCARBONATE MILKY COVER	2m	 
	COV.029	POLYCARBONATE CLEAR COVER	2m	
	CAP.066	END CAP		 
	ELA.008	STAINLESS STEEL HOLDER		 



- ARTBAR aluminium profile ideal for wall washing / concealed lighting / decorative lighting / lighting behind plexiglass.
- Adjustable brackets.
- Available with 15° or 35° linear lens.



Image	Code	Description	Length	Design-Detail
	ELA.011	ARTBAR alum.prof. / Anodized	2m	
	LNS.010	LENS 15°/35°	2m	
	ELA.015	ALUMINIUM SLIDING BASE	2m	
	CAP.075	END CAP		
	CAP.076	FRONT CAP		
	ELA.008	STAINLESS STEEL HOLDER		
	ACC.048	BRACKET		



- ARTTUBE aluminium profile ideal for decorative lighting.
- Adjustable brackets.
- Available with 15° or 35° linear lens or covers.
- Accessories for pendant installations.






Image	Code	Description	Length	Design-Detail
	ELA.014	ARTTUBE alum.prof. / Anodized	2m	
	LNS.010	LENS 15°/35°	2m	
	ELA.005	ALUMINIUM SLIDING BASE	1m	
	COV.027 COV.028	POLYCARBONATE MILKY SATIN COVER POLYCARBONATE CLEAR COVER	2m 2m	
	CAP.047	END CAP		
	ACC.049	ARTTUBE BRACKET		
	ACC.063 ACC.065	CEILING SUSPENSION INSTALLATION 150cm CEILING SUSPENSION INSTALLATION 300cm		



CORNER II

Aluminium Profile

Aluminium Profiles 

- CORNER II aluminium profile ideal for installation in corners.
- Available with clear, frosted or milky satin cover.
- Available also in black, white or different RAL colours upon request.






Image	Code	Description	Length	Design-Detail
	PRF.137	CORNER II alum.prof. / Anodized	2m	
	COV.004 COV.005 COV.006	PMMA CLEAR COVER PMMA FROSTED COVER PMMA MILKY SATIN COVER	2m 2m 2m	
	CAP.147	FRONT CAP		
	CAP.148	END CAP		
	PRH.005	STAINLESS STEEL HOLDER Note: Use 2pcs up to 103cm, 3pcs up to 153cm & 4pcs up to 203cm		



CORNER 45

Aluminium Profile

Aluminium Profiles 

- CORNER 45 aluminium profile ideal for installation in corners.
- Available with transparent, milky, milky satin or ruled cover.
- Available also in black, white or different RAL colours upon request.






Image	Code	Description	Length	Design-Detail
	PRF.034 PRF.035	CORNER 45 alum.prof. / Anodized CORNER 45 alum.prof. / Non-Anodized	2m 2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	COV.018 COV.017 COV.007	POLYCARBONATE CLEAR COVER POLYCARBONATE OPAL COVER PMMA FROSTED COVER	2m 2m 2m	
	CAP.087 CAP.086	FRONT CAP for CORNER 45 with COV.023-024-025-026-038 END CAP for CORNER 45 with COV.023-024-025-026-038		
	CAP.089 CAP.088	FRONT CAP for CORNER 45 with COV.017-018-007 END CAP for CORNER 45 with COV.017-018-007		
	ELA.008	STAINLESS STEEL HOLDER		



V TYPE

Aluminium Profile



- V TYPE aluminium profile ideal for surface or recessed applications.
- Available with transparent, milky, milky satin or ruled cover.
- 45 degrees installation.
- Available also in black, white or different RAL colours upon request.



Image	Code	Description	Length	Design-Detail
	PRF.020 PRF.021	V TYPE alum.prof. / Anodized V TYPE alum.prof. / Non-Anodized	2m 2m	
	COV.023	POLYCARBONATE MILKY COVER	2m	
	COV.024	POLYCARBONATE MILKY SATIN COVER	2m	
	COV.025	POLYCARBONATE RULED COVER	2m	
	COV.026	POLYCARBONATE CLEAR COVER	2m	
	COV.038	POLYCARBONATE BLACK SATIN COVER	2m	
	COV.018	POLYCARBONATE CLEAR COVER	2m	
	COV.017	POLYCARBONATE OPAL COVER	2m	
	COV.007	PMMA FROSTED COVER	2m	
	COV.033	PMMA LENS COVER 45° Note: Ideal for monochromatic & RGBW LED strip	2m	
	CAP.090 CAP.091	END CAP for V TYPE with COV.023-024-025-026-038 FRONT CAP for V TYPE with COV.023-024-025-026-038		
	CAP.043 CAP.044	END CAP for V TYPE with COV.017-018-007 FRONT CAP for V TYPE with COV.017-018-007		



- CORNER ECO aluminium profile suitable for low cost installation in corners.
- Available with milky cover.




Image	Code	Description	Length	Design-Detail
	PRF.160	CORNER ECO alum.prof. / Anodized	2m	
	COV.051	MILKY COVER for CORNER ECO	2m	 
	CAP.150	CAP for CORNER ECO		 
	ACC.370	STAINLESS STEEL HOLDER		 



STAIR DUE

Aluminium Profile

Aluminium Profiles 

- STAIR DUE aluminium profiles with double light emittance for illuminating stairs.
- The special position of the LEDs in the upper part guarantees a glare free illumination without having the LEDs visible even with transparent cover.








Image	Code	Description	Length	Design-Detail
	PRF.031 PRF.032 PRF.033	STAIR DUE SILVER alum.prof. / Anodized STAIR DUE BLACK alum.prof. / Anodized STAIR DUE alum.prof. / Non-Anodized	2m 2m 2m	
	COV.023 COV.024 COV.025 COV.026 COV.038	POLYCARBONATE MILKY COVER POLYCARBONATE MILKY SATIN COVER POLYCARBONATE RULED COVER POLYCARBONATE CLEAR COVER POLYCARBONATE BLACK SATIN COVER	2m 2m 2m 2m 2m	
	CAP.053 CAP.055	END CAP SILVER for PRF.031/033 / Anodized END CAP BLACK for PRF.032 / Anodized		
	ACC.066	3M SAFETY WALK BLACK available per reel of 18meters or per meter for PRF.031/032/033		



- TRIMLESS ECO aluminium profile suitable for low cost installations.
- Available with milky cover.








Image	Code	Description	Length	Design-Detail
	PRF.161	TRIMLESS ECO alum.prof. / Anodized	2m	
	COV.052	MILKY COVER for TRIMLESS ECO	2m	
	CAP.151	CAP for TRIMLESS ECO		



MANDI

Aluminium Profile

- MANDI aluminium profile system
- Corner and line extensions available.



Aluminium Profiles

Image	Code	Description	Length	Design-Detail
	PRF.055	MANDI alum.prof. / Anodized	2m	
	PRF.064	MANDI alum.prof. / Anodized Black	2m	
	PRF.059	MANDI alum.prof. / Non-Anodized	2m	
	PRF.066	MANDI CORNER INTERNAL SET 90° BLACK		
	PRF.067	MANDI CORNER EXTERNAL SET 90° BLACK		
	PRF.068	MANDI CORNER U TYPE SET BLACK		
	CAP.100	END CAP		
	ACC.100	BASE FOR LED DRIVER		
	ACC.056	EXTENSION LINE		
	ACC.057	90° CORNER EXTENSION		
	ACC.084	90° CORNER SIDE EXTENSION		

