

INTERIOR SYSTEMS




Hotel Juliani, St Julians, Malta

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

- Click It is an elegant system ideal for highly demanding aesthetically spaces.
- The system is available in surface, pendant and trimless version.
- Flexibility and easiness in the repositioning of the luminaires with a click.
- It is offered with a vast variety of accessories for limitless design in the final layout.
- Click It Spots include: three sized spots, zoom spot, frame and gobo spots.
- Click It Linear luminaires include: linear spots, linear wash, and four sized linear ambient luminaires.
- Click It Tubes include: two sized tubes rotatable 340degrees ensuring an interesting pattern.
- Click It Decorative luminaires include: two pendant cylindrical fixtures, a sphere spot and a pendant sphere.
- The system is offered in 42V PWM Dimmable or 48V DALI Dimmable.


Click It Surface Track

Code	Model	Length	Colour
CLK.013	Click It Surface Track	2m	Black
CLK.014	Click It Surface Track	3m	Black
CLK.016	Click It Surface Track	2m	White
CLK.017	Click It Surface Track	3m	White



Click It Trimless Track



Code	Model	Length	Colour
CLK.001	Click It Trimless Track	2m	Black
CLK.002	Click It Trimless Track	3m	Black
CLK.004	Click It Trimless Track	2m	White
CLK.005	Click It Trimless Track	3m	White



SURFACE CONNECTORS for CLICK IT System

SURFACE


Code	Description	Colour
CLK.058	2x180 Connector Surface	Black
CLK.059	2x180 Connector Surface	White
CLK.045	2x90 Connector Surface	Black
CLK.054	2x90 Connector Surface	White
CLK.060	3x90 Connector Surface	Black
CLK.061	3x90 Connector Surface	White
CLK.062	4x90 Connector Surface	Black
CLK.063	4x90 Connector Surface	White
CLK.064	2x120 Connector Surface	Black
CLK.065	2x120 Connector Surface	White
CLK.068	3x60 Connector Surface	Black
CLK.069	3x60 Connector Surface	White
CLK.066	6x60 Connector Surface	Black
CLK.067	6x60 Connector Surface	White

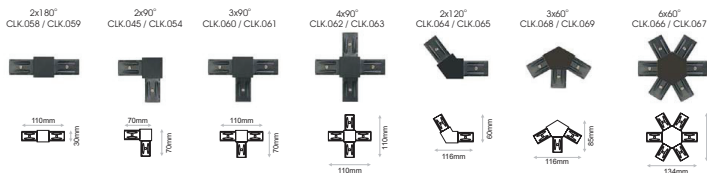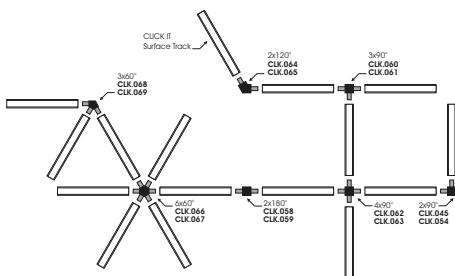

SURFACE PREFABRICATED CORNERS 90° for CLICK IT System

SURFACE


Code	Description	Colour
CLK.018	L CORNER Surface Ceiling to Ceiling	Black
CLK.021	L CORNER Surface Ceiling to Ceiling	White
CLK.019	L CORNER Surface Ceiling to Wall IN	Black
CLK.022	L CORNER Surface Ceiling to Wall IN	White
CLK.020	L CORNER Surface Ceiling to Wall OUT	Black
CLK.023	L CORNER Surface Ceiling to Wall OUT	White
CLK.118	CURVED 90° CORNER for Surface Track	Black
CLK.119	CURVED 90° CORNER for Surface Track	White

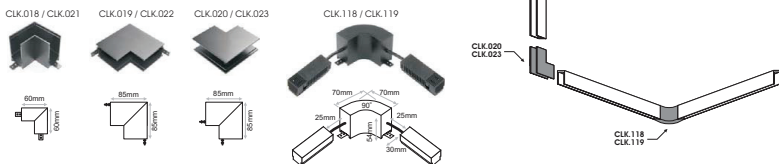


TRIMLESS

Code	Description	Colour
CLK.006 CLK.009	L CORNER Trimless Ceiling to Ceiling L CORNER Trimless Ceiling to Ceiling	Black White
CLK.007 CLK.010	L CORNER Trimless Ceiling to Wall IN L CORNER Trimless Ceiling to Wall IN	Black White
CLK.008 CLK.011	L CORNER Trimless Ceiling to Wall OUT L CORNER Trimless Ceiling to Wall OUT	Black White
CLK.096 CLK.097	T Connector Trimless T Connector Trimless	Black White
CLK.098 CLK.099	+ Connector Trimless + Connector Trimless	Black White


CLK.006 / CLK.009



CLK.007 / CLK.010





CLK.008 / CLK.011



CLK.096 / CLK.097



CLK.098 / CLK.099

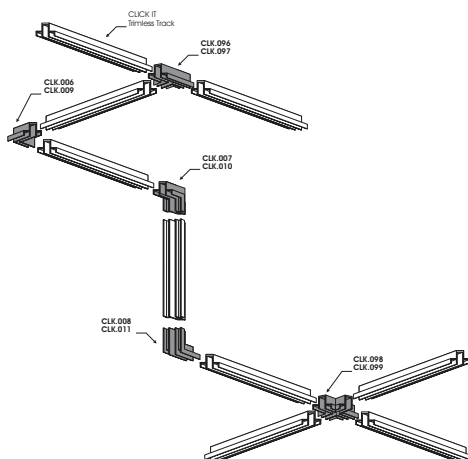

Code	Description	Colour
------	-------------	--------

CLK.024	Live End with 1,5m cable	Black
CLK.025	Live End with 1,5m cable	White
CLK.033	Live End with 0,6m cable	Black
CLK.034	Live End with 0,6m cable	White

CLK.035	Live end no cable / straight connector	Black
CLK.036	Live end no cable / straight connector	White

CLK.038	Adjustable Live Connector for track	Black
CLK.039	Adjustable Live Connector for track	White

CLK.026	Driver Box L279mm	Black
CLK.027	Driver Box L279mm	White

CLK.029	Black Cover 2m	Black
CLK.030	Black Cover 3m	Black
CLK.103	White Cover 2m	White
CLK.104	White Cover 3m	White

CLK.121	PMMA Transparent Cover for Indirect Lighting 2m	Transparent
---------	---	-------------

CLK.031	End Cap Trimless & Surface	Black
CLK.032	End Cap Trimless & Surface	White

CLK.037	Extension Line Connector	Black
CLK.105	Extension Line Connector	White

CLK.935	Luminaire Stop for Vertical Installation	Black
CLK.936	Luminaire Stop for Vertical Installation	White

PRH.082	Canopy Surface BLACK	Black
PRH.039	Canopy Surface WHITE	White

PRH.083	Canopy Recessed BLACK	Black
PRH.040	Canopy Recessed WHITE	White

PRH.084	Canopy Trimless BLACK	Black
PRH.041	Canopy Trimless WHITE	White

ACC.291	Ceiling Suspension Installation 1,5m
ACC.292	Ceiling Suspension Installation 3m





ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 66 Antiochias St, N.Philadephia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

CLICK IT SPOT 22W

- L90/B10 50.000h
- 3 SDCM




CREE 
LEDS

Model (LED Power)	CCT	LED Source	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
CLICK IT SPOT 22.3W (CLICK IT S22)	2700K (27C)	2465lm	Adjustable (AD)	80 (80)	22° (22)	White (WH)	42V PWM Dimmable (DM)	Standard Honeycomb Line spread lens Softening lens EXTRAS No Extras Snoot Black Half Snoot Black Frosted Cover
	3000K (30C)	2451lm			35° (35)	Black (BL)	48V DALI Dimmable (DL)	
	4000K (40C)	2837lm			42° (42)			
	5000K (50C)	2451lm						

* Available also in CRI90 upon request.

Ordering Code Example: **CLICK IT S22-30C-AD-80-35-WH-DL-00**



CLICK IT SPOT 22W
42V PWM Dimmable



CLICK IT SPOT 22W
48V DALI Dimmable



- L90/B10 50.000h
- 3 SDCM




CREE
LEDs

Model (LED Power)	CCT	LED Source	Type	CRI*	Beam Angle	Colour	Dimming Option	Accessories
CLICK IT SPOT 17.6W (CLICK IT S18)		C980						
	2700K (27C)	1518lm	Adjustable (AD)	80 (80)	21° (21)	White (WH)	42V PWM Dimmable (DM)	Standard (0/1)
	3000K (30C)	1634lm			35° (35)	Black (BL)	48V DALI Dimmable (DL)	Honeycomb (1/1)
	4000K (40C)	1634lm			44° (44)			Line spread lens (2/1)
	5000K (50C)	1750lm						Softening lens (3/1)
								EXTRAS No Extras (1/0) Snoot Black (1/1) Half Snoot Black (1/2) Frosted Cover (1/3)

* Available also in CRI90 upon request.

Ordering Code Example: CLICK IT S18-30C-AD-80-35-WH-DL-00



CLICK IT SPOT 18W
42V PWM Dimmable



CLICK IT SPOT 18W
48V DALI Dimmable



Tilt 90°
Rotate 320°



Honeycomb
(for Ø52)



Line spread lens
(for Ø52)



Softening lens
(for Ø52)



Snoot
(for Ø52)

also available
in white colour



Half Snoot
(for Ø52)

also available
in white colour



Frosted Cover
(for Ø52)

CLICK IT SPOT 7W

- L90/B10 50.000h
- 3 SDCM



CREE  **LEDs**

Model (LED Power)	CCT	LED Source	Type	CRI*	Beam Angle	Colour	Dimming Option
		C980					
CLICK IT SPOT 7W	2700K (27C)	636lm	Adjustable (AD)	80 (80)	27° (27)	White (WH)	42V PWM Dimmable (DM)
(CLICK IT S7)	3000K (30C)	682lm			32° (32)	Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	736lm			46° (46)		
	5000K (50C)	736lm					


* Available also in CRI90 upon request.

Ordering Code Example: **CLICK IT S7-30C-AD-80-32-WH-DL**

**CLICK IT SPOT 7W
42V PWM Dimmable**



**CLICK IT SPOT 7W
48V DALI Dimmable**







- L90/B10 50.000h
- 3 SDCM

LIGHTSOURCE BY
bridgelux.


Model (LED Power)	CCT	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option
CLICK IT ZOOM SPOT 12W (CLICK IT ZS12)	2700K (27C)	80 (80)	90 (90)	Adjustable (1650) 16°(min)-50°(max)	Adjustable (AD)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	1194lm	992lm			Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	1257lm	1055lm				

Ordering Code Example: CLICK IT ZS12-30C-80-1650-AD-WH-DL





ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias St, N.Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

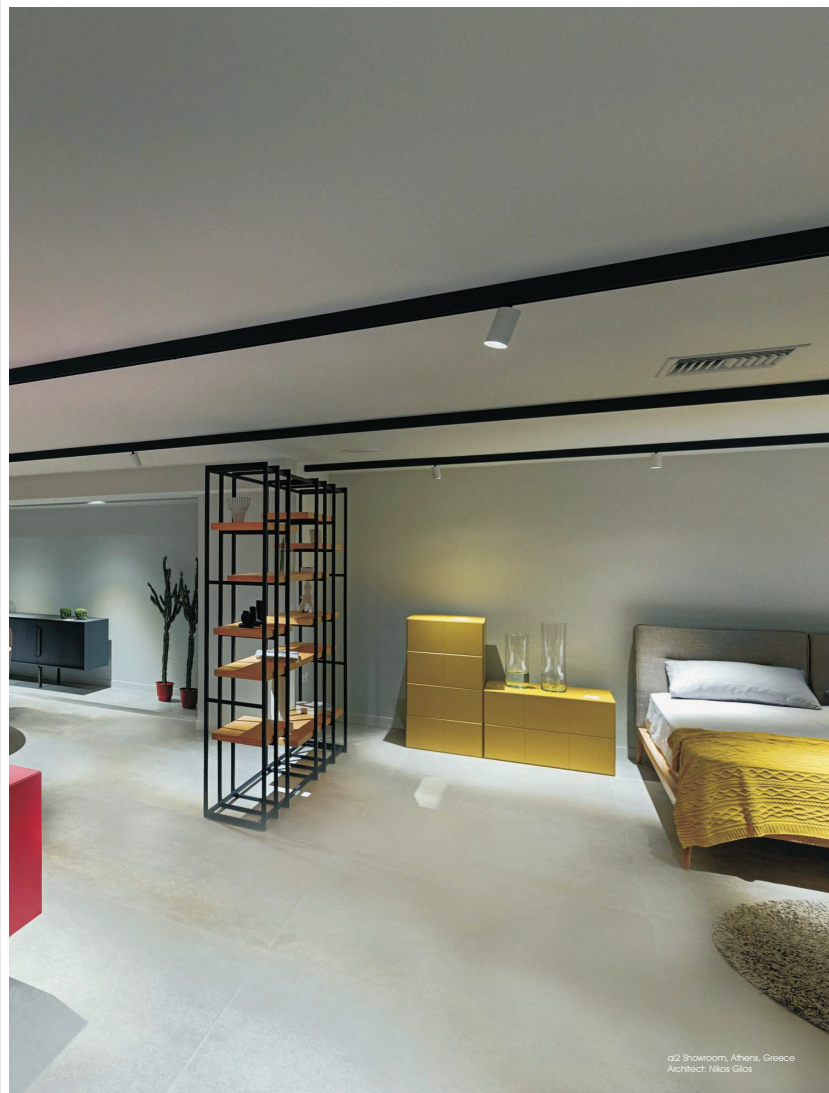

at2 Showroom, Athens, Greece
Architect: Nikos Glos

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 66 Antichias St, N. Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

CLICK IT FRAME SPOT 13W

- L90/B10 50.000h
- 3 SDCM





Frame Spot



Model (LED Power)	CCT	LED Source	Type	CRI*	Beam Angle	Colour	Dimming Option
CLICK IT FRAME SPOT 12.8W <i>(CLICK IT FR S13)</i>		CRI80					
	2700K (27C)	1102lm	Adjustable (AD)	80 (80)	27° max (27)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	1148lm				Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	1211lm					
	5000K (50C)	1226lm					

* Available also in CRI90 upon request.

Ordering Code Example: *CLICK IT FR S13-30C-AD-80-27-WH-DL*



- L90/B10 50.000h
- 3 SDCM





Gobo Spot



Model (LED Power)	CCT	LED Source	Type	CRI*	Colour	Dimming Option
CR80						
CLICK IT GOBO SPOT 12.8W (CLICK IT GB S13)	2700K (27C)	1102lm	Adjustable (AD)	80 (80)	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	1148lm			Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	1211lm				
	5000K (50C)	1226lm				

* Available also in CRI90 upon request.

Ordering Code Example: **CLICK IT GB S13-30C-AD-80-WH-DL**





CLICK IT LINEAR SPOT 15W

- L90/B10 50.000h
- 3 SDCM



Model (LED Power)	CCT	CR180 LED Source	CR190 LED Source	Beam Angle	Colour	Dimming Option
CLICK IT LINEAR SPOT 14.9W (CLICK IT LS15)	2700K (27C)	1332lm	1098lm	9°	White (WH)	42V PWM Dimmable (DM)
	3000K (30C)	1404lm	1170lm	13°	Black (BL)	48V DALI Dimmable (DL)
	4000K (40C)	1476lm	1332lm	25°		
	5000K (50C)	1476lm	1332lm	32°		
				56°		
				9°-32° Asymmetric		

Ordering Code Example: **CLICK IT LS15-30C-80-MD-BL-DL**


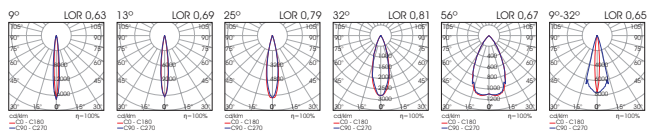


- L90/B10 50.000h
- 3 SDCM



Model (LED Power)	CCT	CR80 LED Source	CR90 LED Source	Beam Angle	Colour	Dimming Option
CLICK IT LINEAR WASH 14W <i>(CLICK IT LW14)</i>	2700K (27C)	80 (80)	90 (90)	10°x48° (1048)	White (Wh) Black (Bl)	42V PWM Dimmable (DM) 48V DALI Dimmable (DL)
	3000K (30C)	1250lm	1026lm			
	4000K (40C)	1332lm	1098lm			
	5000K (50C)	1404lm	1250lm			

Ordering Code Example: *CLICK IT LW14-30C-80-1048-BL-DM*



CLICK IT AMBIENT 35W

- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
CR80							
CLICK IT AMBIENT 34.6W (CLICK IT A35)	2700K (278)	5525lm	Fixed (FX)	80 (80)	115° (115)	White (WH)	42V PWM Dimmable (DM)
	3000K (308)	5860lm				Black (BL)	48V DALI Dimmable (DL)
	4000K (408)	6165lm					
	5000K (508)	6165lm					

* Available also in CR90 upon request.

Ordering Code Example: CLICK IT A35-308-FX-80-115-WH-DL



- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
C18180							
CLICK IT AMBIENT 24.8W (CLICK IT A25)	2700K (27B)	3960lm	Fixed (FX)	80 (80)	115° (115)	White (WH)	42V PWM Dimmable (DM)
	3000K (30B)	4200lm				Black (BL)	48V DALI Dimmable (DL)
	4000K (40B)	4440lm					
	5000K (50B)	4440lm					

* Available also in CR190 upon request.

Ordering Code Example: *CLICK IT* A25-308-FX-80-115-WH-DL

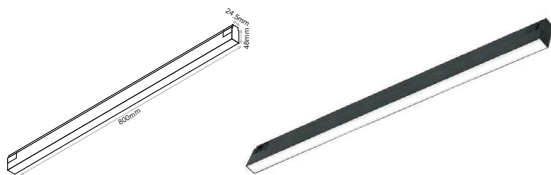

CLICK IT AMBIENT 12W

- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 12.4W (CLICK IT A12)		CR80					
	2700K (278)	1980lm	Fixed (FX)	80 (80)	115° (115)	White (WH)	42V PWM Dimmable (DM)
	3000K (308)	2100lm				Black (BL)	48V DALI Dimmable (DL)
	4000K (408)	2220lm					
	5000K (508)	2220lm					

* Available also in CR90 upon request.

Ordering Code Example: CLICK IT A12-30B-FX-80-115-WH-DL



- L90/B10 50.000h
- 3 SDCM




LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
CLICK IT AMBIENT 9.2W (CLICK IT A9)	CR80						
	2700K (27B)	990lm	Fixed (FX)	80 (80)	115° (115)	White (WH)	42V PWM Dimmable (DM)
	3000K (30B)	1050lm				Black (BL)	48V DALI Dimmable (DL)
	4000K (40B)	1110lm					
	5000K (50B)	1110lm					

* Available also in CRI90 upon request.

Ordering Code Example: **CLICK IT A9-30B-FX-80-115-WH-DL**





ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str. N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr



Today's Dental, Athens, Greece
Photo: Aggelos Mitropoulos

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antichias St, N.Philadephia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

CLICK IT TUBE 30W




- L90/B10 50.000h
- 3 SDCM



LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Length	Dimming Option
C990							
CLICK IT TUBE 30.1W (CLICK IT T30)	2700K (278)	3189lm	Adjustable (AD)	90 (90)	110° (110)	1200mm (1200)	42V PWM Dimmable (DM) 48V DALI Dimmable (DL)
	3000K (308)	3420lm					
	4000K (408)	3690lm					
	5000K (508)	3690lm					

Ordering Code Example: CLICK IT T30-308-AD-90-110-1200-DL






- L90/B10 50.000h
- 3 SDCM



LIGHTSOURCE BY
bridgelux.


Model (LED Power)	CCT	LED Source	Type	CRI	Beam Angle	Length	Dimming Option
CR90							
CLICK IT TUBE 22.7W <i>(CLICK IT T23)</i>	2700K (27B)	1843lm	Adjustable (AD)	90 (90)	110° (110)	800mm (800)	42V PWM Dimmable (DM)
	3000K (30B)	1976lm					48V DALI Dimmable (DL)
	4000K (40B)	2132lm					
	5000K (50B)	2132lm					

Ordering Code Example: CLICK IT T23-30B-AD-90-110-800-DL



CLICK IT PENDANT 21W

- L90/B10 50.000h
- 3 SDCM



CREE 
LEDs

Model (LED Power)	CCT	CRIB0* LED Source	Beam Angle	Colour	Dimming Option	Accessories
		80 (80)				
CLICK IT PENDANT 20.6W (CLICK IT PD21)	2700K (27C)	2147lm	18° (18)	White (WH)	42V PWM Dimmable (DM)	Standard (0/1)
	3000K (30C)	2309lm	37° (37)	Black (BL)	48V DALI Dimmable (DL)	Honeycomb (1/1)
	4000K (40C)	2379lm	42° (42)			Line spread lens (2/1)
	5000K (50C)	2309lm				Softening lens (3/1)
						EXTRAS No Extras (1/0) Snoot Black (1/1) Half Snoot Black (1/2) Frosted Cover (1/3)

* Available also in CR190 upon request.

Ordering Code Example: **CLICK IT PD21-30C-80-37-WH-DL-00**



Honeycomb
(for Ø52)



Line spread lens
(for Ø52)



Softening lens
(for Ø52)



Snoot
(for Ø52)

also available
in white colour






Half Snoot
(for Ø52)



also available
in white colour



Frosted Cover
(for Ø52)




- L90/B10 50.000h
- 3 SDCM

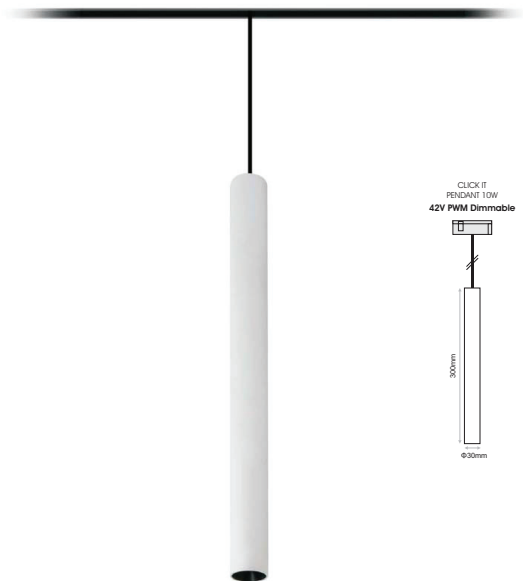

Model (LED Power)	CCT	CR180* LED Source	Beam Angle	Colour	Dimming Option
		80 (R3)			
CLICK IT PENDANT 10W (CLICK IT PD10)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	767lm 823lm 888lm 888lm	27° (27) 32° (32) 46° (46)	White (WH) Black (BK)	42V PWM Dimmable (DM) 48V DALI Dimmable (DL)

* Available also in CR190 upon request.

Ordering Code Example: CLICK IT PD10-30C-80-32-WH-DL



CLICK IT SPHERE SPOT 5W

- L90/B10 50.000h
- 3 SDCM




wholesource by
bridgelux

Model (LED Power)	CCT*	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
CR80							
CLICK IT SPHERE SPOT 4.5W <i>(CLICK IT SPH SP5)</i>	2700K (27B)	348lm	Fixed (FX)	80 (80)	180° (180)	Black (BL)	42V PWM Dimmable (DM)
	3000K (30B)	374lm					48V DALI Dimmable (DL)

* Available also in 4000K & 5000K upon request.

Ordering Code Example: *CLICK IT SPH SP5-30B-FX-80-180-BL-DL*



CLICK IT SPHERE PENDANT 5W

- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT*	LED Source	Type	CRI	Beam Angle	Colour	Dimming Option
C980							
CLICK IT SPHERE PENDANT 4.5W (CLICK IT SPH PD5)	2700K (278) 3000K (308)	348lm 374lm	Fixed (FX)	80 (80)	180° (180)	Black (BL)	42V PWM Dimmable (DM) 48V DALI Dimmable (DL)

* Available also in 4000K & 5000K upon request.

Ordering Code Example: CLICK IT SPH PD5-308-FX-80-180-BL-DL




CLICK IT ROUND


- CLICK IT ROUND is an elegant slim system ideal for highly demanding architectural spaces.
- It is available in surface or pendant .
- 48V PWM Dimmable.
- Track max amperage 16A.

Click It Round **Surface / Pendant** Track

Code	Model	Length	Colour
CLK.159	Click It Round Surface Track	2m	Black
CLK.160	Click It Round Surface Track	3m	Black
CLK.161	Click It Round Surface Track	4m	Black
CLK.162	Click It Round Surface Track	6m	Black
CLK.155	Click It Round Surface Track	2m	White
CLK.156	Click It Round Surface Track	3m	White
CLK.157	Click It Round Surface Track	4m	White
CLK.158	Click It Round Surface Track	6m	White

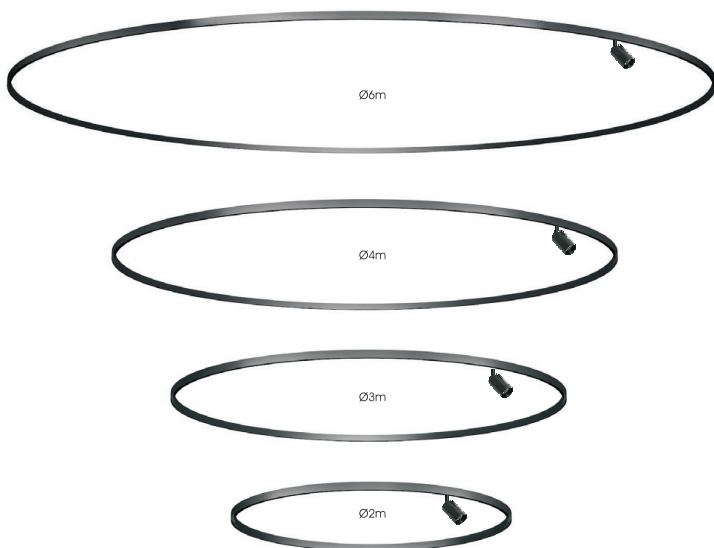

Code	Description	Colour
CLK.177	Live End with 1,5m cable	Black
CLK.178	Live End with 1,5m cable	White
CLK.179	Live End with 0,6m cable	Black
CLK.180	Live End with 0,6m cable	White
CLK.181	Adjustable Live Connector for track	Black
CLK.182	Adjustable Live Connector for track	White
CLK.183	Connector / surface mounted accessory	Black
CLK.184	Connector / surface mounted accessory	White
PRH.082	Canopy Surface BLACK	Black
PRH.039	Canopy Surface WHITE	White
PRH.083	Canopy Recessed BLACK	Black
PRH.040	Canopy Recessed WHITE	White
PRH.084	Canopy Trimless BLACK	Black
PRH.041	Canopy Trimless WHITE	White
ACC.185	Ceiling Suspension Installation 1.5m	Black
ACC.186	Ceiling Suspension Installation 1.5m	White

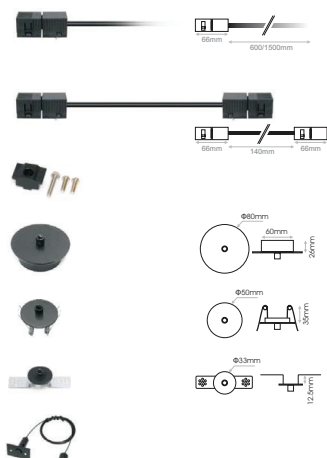

CLICK IT CURVED SPOT 14W & 7W

- L90/B10 50.000h
- 3 SDCM





CREE
LEDs

Model (LED Power)	CCT	CR180* LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)					
CLICK IT CURVED SPOT 13.5W (CLICK IT CS14)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	1670lm 1670lm 1796lm 1796lm	22° (22) 35° (35) 42° (42)	Adjustable (AD)	White (WH) Black (BL)	48V PWM Dimmable (DM)	Standard Honeycomb Line spread lens Softening lens EXTRAS No Extras Snoot Black Half Snoot Black Frosted Cover
CLICK IT CURVED SPOT 7.1W (CLICK IT CS7)	2700K (27C) 3000K (30C) 4000K (40C) 5000K (50C)	890lm 890lm 958lm 958lm					(0/1) (1/1) (2/1) (3/1) ↑ (1/0) (1/1) (1/2) (1/3)

* Available also in CR190 upon request.

Ordering Code Example: CLICK IT CS14-30C-80-42-AD-BL-DM-00



Honeycomb
(for Ø52)



Line spread lens
(for Ø52)



Softening lens
(for Ø52)



Snoot
(for Ø52)

also available
in white colour



Half Snoot
(for Ø52)

also available
in white colour



Frosted Cover
(for Ø52)



- L90/B10 50.000h
- 3 SDCM




Model (LED Power)	CCT	CR890* LED Source	Beam Angle	Type	Colour	Dimming Option
		80 (80)				
CLICK IT CURVED SPOT 4.3W (CLICK IT CS4)	2700K (27C)	427lm	27° (27)	Adjustable (AD)	White (WH) Black (BL)	48V PWM Dimmable (DM)
	3000K (30C)	427lm	32° (32)			
	4000K (40C)	461lm	46° (46)			
	5000K (50C)	461lm				

* Available also in CR890 upon request.

Ordering Code Example: CLICK IT CS4-30C-80-46-AD-BL-DM



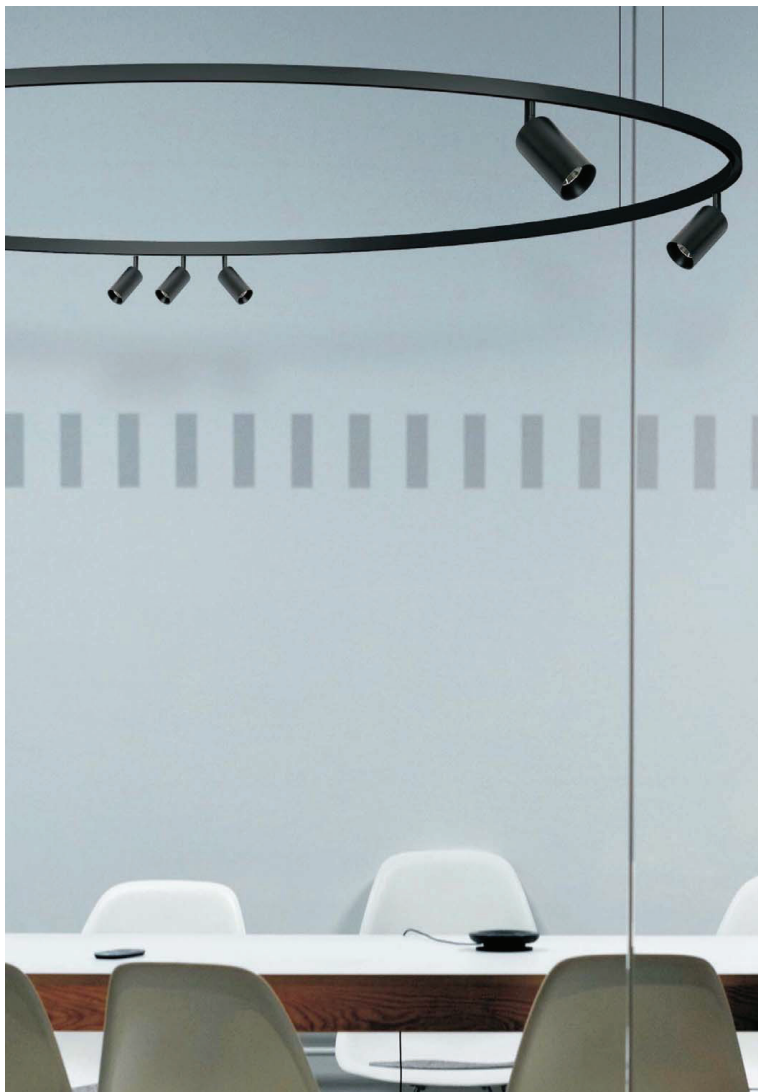

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

- Nano is a new miniaturized system suitable for highly demanding spaces.
- The system is suitable for surface, pendant and timeless application.
- Flexibility and easiness in the repositioning of the luminaires.
- It is offered with a variety of accessories.
- Nano system includes: Nano spots, Nano linear spots and Nano linear ambient luminaires.
- The system is offered 48V Dali Dimmable.


NANO Surface Track

Code	Model	Length	Colour
NAN.001	NANO Surface Track	2m	Black
NAN.002	NANO Surface Track	3m	Black
NAN.003	NANO Surface Track	2m	White
NAN.004	NANO Surface Track	3m	White



ACCESSORIES for NANO System

Code	Description	Colour
NAN.005	Black Cover 2m	Black
NAN.006	Black Cover 3m	Black
NAN.007	White Cover 2m	White
NAN.008	White Cover 3m	White
NAN.009	Live End with 0.6m cable	Black
NAN.010	Live End with 0.6m cable	White
NAN.011	Adjustable Live Connector for track	Black
NAN.012	Adjustable Live Connector for track	White
NAN.013	End Cap	Black
NAN.014	End Cap	White
NAN.015	Extension Line Connector	Black
NAN.016	Extension Line Connector	White
NAN.017	L CORNER Surface Ceiling to Ceiling	Black
NAN.018	L CORNER Surface Ceiling to Ceiling	White
NAN.019	L CORNER Surface Ceiling to Wall OUT	Black
NAN.020	L CORNER Surface Ceiling to Wall OUT	White
NAN.021	L CORNER Surface Ceiling to Wall IN	Black
NAN.022	L CORNER Surface Ceiling to Wall IN	White
NAN.023	Accessory for Timeless Installation	Black
NAN.024	Accessory for Timeless Installation	White
ACC.086	Ceiling Suspension Installation 1.5m	
ACC.233	Ceiling Suspension Installation 3m	

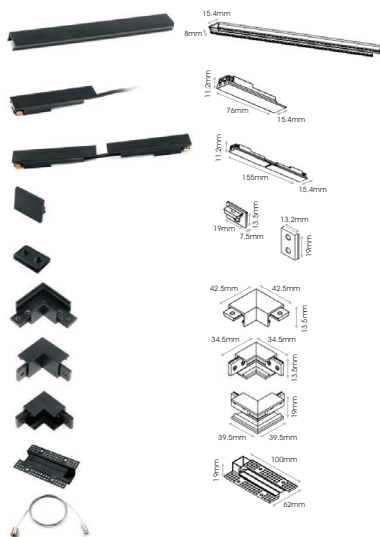

NANO SPOT 4W & 6W

- L90/B10 50.000h
- 3 SDCM




CREE 
LEDs

Model (LED Power)	Watt	CCT	CR80 LED Source	CR90 LED Source	Beam Angle	Type	Colour	Dimming Option	
			80 (80)	90 (90)					
NANO SPOT (NANO SP)	3.8W (04)	2700K (27C)	460lm	370lm	28° (28)	Adjustable (AD)	White (WH) Black (BL)	48V PWM Dimmable (DM)	
		3000K (30C)	460lm	400lm	38° (38)				
		4000K (40C)	500lm	430lm	50° (50)				
		5000K (50C)	500lm	460lm					
	5.5W (06)	2700K (27C)	670lm	540lm	27° (27)				
		3000K (30C)	670lm	575lm	32° (32)				
		4000K (40C)	720lm	625lm	41° (41)				
		5000K (50C)	720lm	670lm					

Ordering Code Example:

NANO SP-04-30C-90-38-AD-WH-DM




- L90/B10 50.000h
- 3 SDCM



Model (LED Power)	Watt	CCT	CR80 LED Source	CR90 LED Source	Beam Angle	Type	Colour	Dimming Option
			80 (80)	90 (90)				
NANO SPOT ROUND (NANO SP RD)	6.7W (07)	2700K (27C)	820lm	660lm	13° (13)	Adjustable (AD)	White (WH)	48V PWM Dimmable (DM)
		3000K (30C)	820lm	705lm	20° (20)		Black (BL)	
		4000K (40C)	885lm	760lm	35° (35)			
		5000K (50C)	885lm	820lm	48° (48)			
					60° (60)			

Ordering Code Example:
NANO SP RD-07-30C-90-48-AD-BL-DM



NANO AMBIENT 7W & 13W


- L90/B10 50.000h
- 3 SDCM



LIGHTSOURCE BY
bridgelux.

Model (LED Power)	Watt	CCT	CR90 LED Source	Beam Angle	Type	Colour	Dimming Option
			90 (90)				
NANO AMBIENT (NANO A)	6.7W (07)	2700K (27C)	615lm	115° (115)	Fixed (FX)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		3000K (30C)	620lm				
		4000K (40C)	630lm				
		5000K (50C)	630lm				
	13.4W (13)	2700K (27C)	1030lm				
		3000K (30C)	1040lm				
		4000K (40C)	1060lm				
		5000K (50C)	1060lm				

Ordering Code Example:
NANO A-13-30C-90-115-FX-BL-DM




- L90/B10 50.000h
- 3 SDCM

LIGHTSOURCE BY
bridgelux

Model (LED Power)	Watt	CCT	C990 LED Source	Beam Angle	Type	Colour	Dimming Option
NANO LINEAR SPOT (NANO LS)	4.8W (05)		90 (90)	33° (33)	Fixed (FX)	White (WH) Black (BL)	48V PWM Dimmable (DM)
		2700K (27C)	460lm				
		3000K (30C)	460lm				
		4000K (40C)	470lm				
		5000K (50C)	480lm				
	9.6W (10)	2700K (27C)	920lm				
		3000K (30C)	920lm				
		4000K (40C)	960lm				
		5000K (50C)	970lm				

Ordering Code Example:
NANO LS-10-30C-90-33-FX-BL-DM





Hotel Juliani, St Julian's, Malta

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr