


INTERIOR SPOTLIGHTS


TRACK SYSTEM

Interior Spotlights 


- 3-circuit track system available in white, black and grey colour.
- Available in 3 different lengths.
- Available for surface or recessed installation.
- Available accessories in white, black and grey colour.

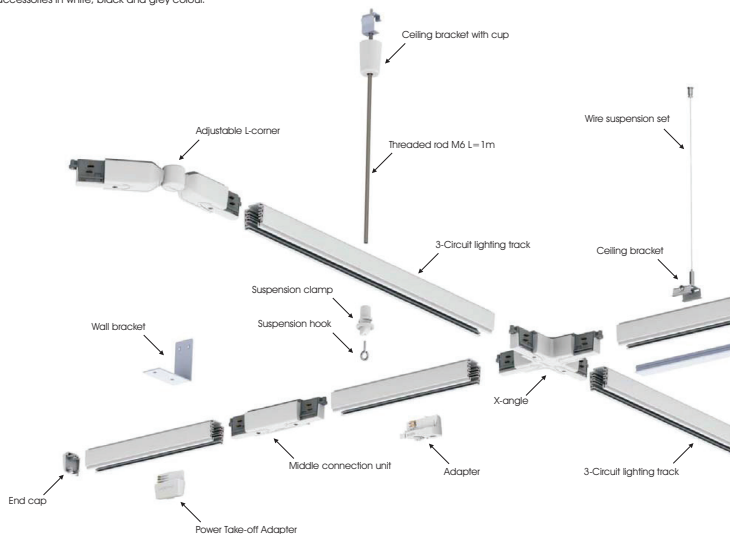

3-Circuit lighting track, Surface




Code	Model	Length	Colour
TRA.001	3-Circuit lighting track, Surface	2m	White
TRA.002	3-Circuit lighting track, Surface	3m	White
TRA.003	3-Circuit lighting track, Surface	4m	White
TRA.004	3-Circuit lighting track, Surface	2m	Grey
TRA.005	3-Circuit lighting track, Surface	3m	Grey
TRA.006	3-Circuit lighting track, Surface	4m	Grey
TRA.007	3-Circuit lighting track, Surface	2m	Black
TRA.008	3-Circuit lighting track, Surface	3m	Black
TRA.009	3-Circuit lighting track, Surface	4m	Black

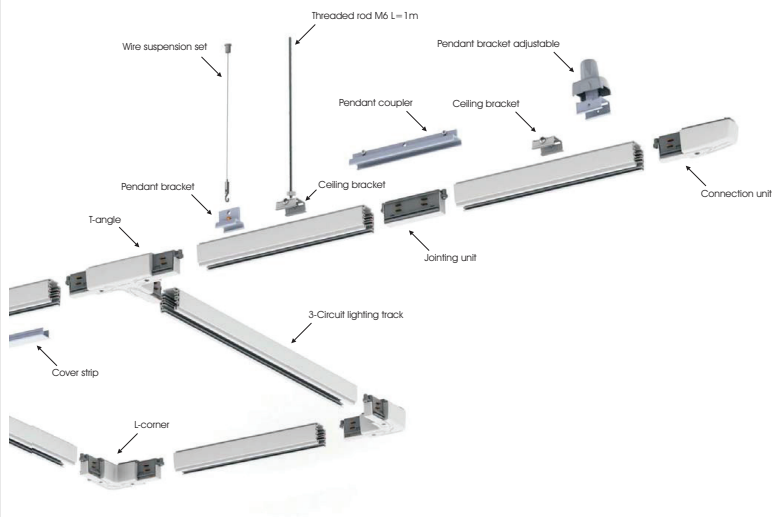

3-Circuit lighting track, Recessed

Code	Model	Length	Colour
TRA.010	3-Circuit lighting track, Recessed	2m	White
TRA.011	3-Circuit lighting track, Recessed	3m	White
TRA.012	3-Circuit lighting track, Recessed	4m	White
TRA.013	3-Circuit lighting track, Recessed	2m	Grey
TRA.014	3-Circuit lighting track, Recessed	3m	Grey
TRA.015	3-Circuit lighting track, Recessed	4m	Grey
TRA.016	3-Circuit lighting track, Recessed	2m	Black
TRA.017	3-Circuit lighting track, Recessed	3m	Black
TRA.018	3-Circuit lighting track, Recessed	4m	Black



Accessories



Code	Description	Colour
<i>Power supply (end feed)</i>		
TRA.031	Connection unit A	White
TRA.032	Connection unit B	White
TRA.033	Connection unit A	Grey
TRA.034	Connection unit B	Grey
TRA.035	Connection unit A	Black
TRA.036	Connection unit B	Black
<i>Middle connection (middle feed)</i>		
TRA.037	Middle connection unit	White
TRA.038	Middle connection unit	Grey
TRA.039	Middle connection unit	Black
<i>Jointing (multicolour)</i>		
TRA.040	Jointing unit	White
TRA.041	Jointing unit	Grey
TRA.042	Jointing unit	Black
<i>90° corner (feed)</i>		
TRA.043	L-corner	White
TRA.044	L-corner	Grey
TRA.045	L-corner	Black
<i>Adjustable corner</i>		
TRA.046	Adjustable L-corner	White
TRA.047	Adjustable L-corner	Grey
TRA.048	Adjustable L-corner	Black
<i>T-connector (feed)</i>		
TRA.049	T-angle A	White
TRA.050	T-angle B	White
TRA.051	T-angle C	White
TRA.052	T-angle D	White
TRA.053	T-angle A	Grey
TRA.054	T-angle B	Grey
TRA.055	T-angle C	Grey
TRA.056	T-angle D	Grey
TRA.057	T-angle A	Black
TRA.058	T-angle B	Black
TRA.059	T-angle C	Black
TRA.060	T-angle D	Black
<i>X-connector (feed)</i>		
TRA.061	X-angle	White
TRA.062	X-angle	Grey
TRA.063	X-angle	Black
<i>3 Phase Adapter</i>		
TRA.097	3 Phase Adapter	White
TRA.098	3 Phase Adapter	Black
TRA.099	3 Phase Adapter	Grey
<i>End cap</i>		
TRA.064	End cap	White
TRA.065	End cap	Grey
TRA.066	End cap	Black
<i>Cover plate</i>		
TRA.067	Cover plate	White
TRA.068	Cover plate	Grey
TRA.069	Cover plate	Black
<i>Ceiling adapter</i>		
TRA.118	Ceiling adapter	Black
TRA.119	Ceiling adapter	White




Code	Description	Colour
<i>Track suspension parts</i>		
TRA.070	Ceiling bracket	White
TRA.071	Ceiling bracket	Grey
TRA.072	Ceiling bracket	Black
TRA.073	Wire suspension set 1,5 m adjustable	
TRA.074	Wire suspension set 4 m adjustable	
TRA.117	Wire suspension set 4 m adjustable	Black
TRA.075	Threaded rod M6 L=1m	
TRA.076	Extension nut for threaded rod M6	
TRA.077	Tube for rod, white	
TRA.078	Nut for threaded rod M6	
TRA.079	Pendant bracket adjustable	White
TRA.080	Pendant bracket adjustable	Grey
TRA.081	Pendant bracket adjustable	Black
TRA.082	Pendant bracket	White
TRA.083	Pendant bracket	Grey
TRA.084	Pendant bracket	Black
TRA.085	Pendant coupler	White
TRA.086	Pendant coupler	Grey
TRA.087	Pendant coupler	Black
TRA.088	Ceiling bracket with cup	White
TRA.089	Ceiling bracket with cup	Black
TRA.090	Wall bracket	White
TRA.091	Wall bracket	Black
TRA.092	Suspension clamp	White
TRA.093	Suspension clamp	Black
TRA.094	Suspension hook	
TRA.095	Cover strip L=2m	White
TRA.096	Cover strip L=2m	Black
TRA.100	Locker	White
TRA.101	Locker	Black
TRA.102	Locker	Grey
TRA.103	AL-Nipple M10 Rotating, Thread 8mm	
TRA.104	AL-Nipple M10 Rotating, Thread 8mm	
TRA.105	Installation tool	
TRA.106	Cable clamp	
TRA.107	Counter Nut	
TRA.108	Power Take-off Adapter	White
TRA.109	Power Take-off Adapter	Black
TRA.110	Power Take-off Adapter	Grey
TRA.111	Adapter with logo	White
TRA.112	Adapter with logo	Black
TRA.113	Adapter with logo	Grey

3-CIRCUIT / 3-CIRCUIT DALI Track System


Interior Spotlights 

- 3-Circuit Track System & 3-Circuit DALI Track System.
- Available for surface mounted or recessed application, the same accessories may be used.
- Available in White, Grey or Black colour.
- Variety of accessories offer solutions for any architectural spaces.



3-Circuit Surface Track

Code	Model	Length	Colour
TRA.500	3-Circuit Surface track	1m	White
TRA.503	3-Circuit Surface track	2m	White
TRA.506	3-Circuit Surface track	3m	White
TRA.501	3-Circuit Surface track	1m	Grey
TRA.504	3-Circuit Surface track	2m	Grey
TRA.507	3-Circuit Surface track	3m	Grey
TRA.502	3-Circuit Surface track	1m	Black
TRA.505	3-Circuit Surface track	2m	Black
TRA.508	3-Circuit Surface track	3m	Black




3-Circuit Recessed Track

Code	Model	Length	Colour
TRA.509	3-Circuit Recessed track	1m	White
TRA.512	3-Circuit Recessed track	2m	White
TRA.515	3-Circuit Recessed track	3m	White
TRA.510	3-Circuit Recessed track	1m	Grey
TRA.513	3-Circuit Recessed track	2m	Grey
TRA.516	3-Circuit Recessed track	3m	Grey
TRA.511	3-Circuit Recessed track	1m	Black
TRA.514	3-Circuit Recessed track	2m	Black
TRA.517	3-Circuit Recessed track	3m	Black


3-Circuit DALI Surface Track

Code	Model	Length	Colour
TRA.590	3-Circuit DALI Surface track	1m	White
TRA.593	3-Circuit DALI Surface track	2m	White
TRA.596	3-Circuit DALI Surface track	3m	White
TRA.591	3-Circuit DALI Surface track	1m	Grey
TRA.594	3-Circuit DALI Surface track	2m	Grey
TRA.597	3-Circuit DALI Surface track	3m	Grey
TRA.592	3-Circuit DALI Surface track	1m	Black
TRA.595	3-Circuit DALI Surface track	2m	Black
TRA.598	3-Circuit DALI Surface track	3m	Black



3-Circuit DALI Recessed Track

Code	Model	Length	Colour
TRA.599	3-Circuit DALI Recessed track	1m	White
TRA.602	3-Circuit DALI Recessed track	2m	White
TRA.605	3-Circuit DALI Recessed track	3m	White
TRA.600	3-Circuit DALI Recessed track	1m	Grey
TRA.603	3-Circuit DALI Recessed track	2m	Grey
TRA.606	3-Circuit DALI Recessed track	3m	Grey
TRA.601	3-Circuit DALI Recessed track	1m	Black
TRA.604	3-Circuit DALI Recessed track	2m	Black
TRA.607	3-Circuit DALI Recessed track	3m	Black



Accessories
3-Circuits track system

Code	Description	Colour	Code	Description	Colour
	TRA.518 Connector Left 3 CIRCUIT	White		TRA.554 Twisted T connector R1->R2	White
	TRA.519 Connector Left 3 CIRCUIT	Grey		TRA.555 Twisted T connector R1->R2	Grey
	TRA.520 Connector Left 3 CIRCUIT	Black		TRA.556 Twisted T connector R1->R2	Black
	TRA.521 Connector Right 3 CIRCUIT	White		TRA.557 L Connector Left	White
	TRA.522 Connector Right 3 CIRCUIT	Grey		TRA.558 L Connector Left	Grey
	TRA.523 Connector Right 3 CIRCUIT	Black		TRA.559 L Connector Left	Black
	TRA.524 Coupler 3 CIRCUIT	White		TRA.560 L Connector Right	White
	TRA.525 Coupler 3 CIRCUIT	Grey		TRA.561 L Connector Right	Grey
	TRA.526 Coupler 3 CIRCUIT	Black		TRA.562 L Connector Right	Black
	TRA.527 Coupler INSULATION 3 CIRCUIT	White		TRA.563 T Connector Left1	White
	TRA.528 Coupler INSULATION 3 CIRCUIT	Grey		TRA.564 T Connector Left1	Grey
	TRA.529 Coupler INSULATION 3 CIRCUIT	Black		TRA.565 T Connector Left1	Black
	TRA.530 Middle Connector	White		TRA.566 T Connector Left2	White
	TRA.531 Middle Connector	Grey		TRA.567 T Connector Left2	Grey
	TRA.532 Middle Connector	Black		TRA.568 T Connector Left2	Black
	TRA.533 END CAP	White		TRA.569 T Connector Right1	White
	TRA.534 END CAP	Grey		TRA.570 T Connector Right1	Grey
	TRA.535 END CAP	Black		TRA.571 T Connector Right1	Black
	TRA.536 End cap recessed	White		TRA.572 T Connector Right2	White
	TRA.537 End cap recessed	Grey		TRA.573 T Connector Right2	Grey
	TRA.538 End cap recessed	Black		TRA.574 T Connector Right2	Black
	TRA.539 Flexible connector	White		TRA.575 Connector cover	White
	TRA.540 Flexible connector	Grey		TRA.576 Connector cover	Grey
	TRA.541 Flexible connector	Black		TRA.577 Connector cover	Black
	TRA.542 Adjustable connector	White		TRA.578 T Connector cover	White
	TRA.543 Adjustable connector	Grey		TRA.579 T Connector cover	Grey
	TRA.544 Adjustable connector	Black		TRA.580 T Connector cover	Black
	TRA.545 X Connector	White		TRA.581 X Connector cover	White
	TRA.546 X Connector	Grey		TRA.582 X Connector cover	Grey
	TRA.547 X Connector	Black		TRA.583 X Connector cover	Black
	TRA.548 Twisted L connector (L and R)	White		TRA.584 Middle connector cover	White
	TRA.549 Twisted L connector (L and R)	Grey		TRA.585 Middle connector cover	Grey
	TRA.550 Twisted L connector (L and R)	Black		TRA.586 Middle connector cover	Black
	TRA.551 Twisted T connector L1->L2	White		TRA.587 L Connector cover	White
	TRA.552 Twisted T connector L1->L2	Grey		TRA.588 L Connector cover	Grey
	TRA.553 Twisted T connector L1->L2	Black		TRA.589 L Connector cover	Black


Accessories
3-Circuits DALI track system

Code	Description	Colour
	TRA.608 Connector Left DALI 3 Circuit	White
	TRA.609 Connector Left DALI 3 Circuit	Grey
	TRA.610 Connector Left DALI 3 Circuit	Black
	TRA.611 Connector Right DALI 3 Circuit	White
	TRA.612 Connector Right DALI 3 Circuit	Grey
	TRA.613 Connector Right DALI 3 Circuit	Black
	TRA.614 Coupler DALI 3 Circuit	White
	TRA.615 Coupler DALI 3 Circuit	Grey
	TRA.616 Coupler DALI 3 Circuit	Black
	TRA.617 Middle connector DALI 3 Circuit	White
	TRA.618 Middle connector DALI 3 Circuit	Grey
	TRA.619 Middle connector DALI 3 Circuit	Black
	TRA.620 Flexible connector DALI 3 Circuit	White
	TRA.621 Flexible connector DALI 3 Circuit	Grey
	TRA.622 Flexible connector DALI 3 Circuit	Black
	TRA.623 X Connector DALI 3 Circuit	White
	TRA.624 X Connector DALI 3 Circuit	Grey
	TRA.625 X Connector DALI 3 Circuit	Black
	TRA.626 L Connector Left DALI 3 Circuit	White
	TRA.627 L Connector Left DALI 3 Circuit	Grey
	TRA.628 L Connector Left DALI 3 Circuit	Black
	TRA.629 L Connector Right DALI 3 Circuit	White
	TRA.630 L Connector Right DALI 3 Circuit	Grey
	TRA.631 L Connector Right DALI 3 Circuit	Black
	TRA.632 T Connector Left1 DALI 3 Circuit	White
	TRA.633 T Connector Left1 DALI 3 Circuit	Grey
	TRA.634 T Connector Left1 DALI 3 Circuit	Black
	TRA.635 T Connector Left2 DALI 3 Circuit	White
	TRA.636 T Connector Left2 DALI 3 Circuit	Grey
	TRA.637 T Connector Left2 DALI 3 Circuit	Black
	TRA.638 T Connector Right1 DALI 3 Circuit	White
	TRA.639 T Connector Right1 DALI 3 Circuit	Grey
	TRA.640 T Connector Right1 DALI 3 Circuit	Black
	TRA.641 T Connector Right2 DALI 3 Circuit	White
	TRA.642 T Connector Right2 DALI 3 Circuit	Grey
	TRA.643 T Connector Right2 DALI 3 Circuit	Black
	TRA.644 Connector cover DALI 3 Circuit	White
	TRA.645 Connector cover DALI 3 Circuit	Grey
	TRA.646 Connector cover DALI 3 Circuit	Black

Track suspension & general accessories

Code	Description	Colour
	TRA.680 Suspension connection clamp	White
	TRA.681 Suspension connection clamp	Grey
	TRA.682 Suspension connection clamp	Black
	TRA.683 Suspension Clamp for Track	White
	TRA.684 Suspension Clamp for Track	Grey
	TRA.685 Suspension Clamp for Track	Black
	TRA.686 Rod suspension	White
	TRA.687 Rod suspension	Grey
	TRA.688 Rod suspension	Black
	TRA.689 Wire suspension 5m G2	White
	TRA.690 Wire suspension 5m G2	Grey
	TRA.691 Wire suspension 5m G2	Black
	TRA.692 Wire suspension 5m	White
	TRA.693 Wire suspension 5m	Grey
	TRA.694 Wire suspension 5m	Black
	TRA.695 T Bar	White
	TRA.696 T Bar	Grey
	TRA.697 T Bar	Black
	TRA.698 Reinforcement plate with 5m wire	White
	TRA.699 Reinforcement plate with 5m wire	Grey
	TRA.700 Reinforcement plate with 5m wire	Black
	TRA.701 Mounting clamp	White
	TRA.702 Mounting clamp	Grey
	TRA.703 Mounting clamp	Black
	TRA.704 Fixing Bracket For Recessed Track	
	TRA.705 Wall clamp 9cm	White
	TRA.706 Wall clamp 9cm	Grey
	TRA.707 Wall clamp 9cm	Black
	TRA.708 Suspension hook	White
	TRA.709 Suspension hook	Grey
	TRA.710 Suspension hook	Black
	TRA.711 Track cover strip 3m	White
	TRA.712 Track cover strip 3m	Black
	TRA.713 Mechanical adapter	White
	TRA.714 Mechanical adapter	Grey
	TRA.715 Mechanical adapter	Black
	TRA.716 Fixed monopoint for track adapter	White
	TRA.717 Fixed monopoint for track adapter	Grey
	TRA.718 Fixed monopoint for track adapter	Black
	TRA.719 Fixed monopoint DALI for track adapter	White
	TRA.720 Fixed monopoint DALI for track adapter	Grey
	TRA.721 Fixed monopoint DALI for track adapter	Black
	TRA.722 Schuko adapter	White
	TRA.723 Schuko adapter	Black

Adapters

	Code	Description	Colour
	TRA.724	Smart 3 circuits adapter	White
	TRA.725	Smart 3 circuits adapter	Grey
	TRA.726	Smart 3 circuits adapter	Black
	TRA.727	Classic 3 circuits adapter	White
	TRA.728	Classic 3 circuits adapter	Grey
	TRA.729	Classic 3 circuits adapter	Black
	TRA.730	Adapter DALI 3 Circuit	White
	TRA.731	Adapter DALI 3 Circuit	Grey
	TRA.732	Adapter DALI 3 Circuit	Black
	TRA.733	Adapter DALI 1 Circuit	White
	TRA.734	Adapter DALI 1 Circuit	Grey
	TRA.735	Adapter DALI 1 Circuit	Black
	TRA.736	Nipple M10x1.0 h8mm (complete ALU)	
	TRA.737	Nipple M10x1.0 h8mm (coloured ring)	White
	TRA.738	Nipple M10x1.0 h8mm (coloured ring)	Grey
	TRA.739	Nipple M10x1.0 h8mm (coloured ring)	Black
	TRA.740	Nipple M10x1.0 h12mm (complete ALU)	
	TRA.741	Nipple M10x1.0 h12mm (coloured ring)	White
	TRA.742	Nipple M10x1.0 h12mm (coloured ring)	Grey
	TRA.743	Nipple M10x1.0 h12mm (coloured ring)	Black
	TRA.744	Nipple M13x1.0 h12mm	
	TRA.745	PVC strain relief	White
	TRA.746	PVC strain relief	Grey
	TRA.747	PVC strain relief	Black
	TRA.748	PVC Nipple strain relief M10	White
	TRA.749	PVC Nipple strain relief M10	Grey
	TRA.750	PVC Nipple strain relief M10	Black
	TRA.751	Tool for smart 3 circuit adapter wiring	



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias St, N.Philadephia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

- Callisto series of indoor tracklights consists of three models. Callisto X is the largest model.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- Available in White or Black Colour.
- Available accessories: honeycomb, antiglare ring and barn door.
- L90/B10 50.000h
- 3 SDCM




Honeycomb



Antiglare Ring



Barn Door




Model (LED Power)	CCT*	CR180 LED Source	CR190 LED Source	CR197 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)	90 (90)	97 (97)					
CALLISTO X 31.3W (CALLISTO X31)	2700K (278) 3000K (308) 4000K (408) 5700K (578)	4510lm 4792lm 4933lm 4792lm	3721lm 3890lm 4115lm -	3298lm 3524lm -	18° (18) 31° (31) 44° (44) 59° (59)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut** (PC) (Trailing Edge Dimmer) Local Dimming** (LD)	Standard Honeycomb (0/1) (1/1) ↓ (XX) ↑ EXTRAS No Extras (0/0) Antiglare Ring Black (1/1) Antiglare Ring White (1/2) Barn Door Black (1/3) Barn Door White (1/4)
CALLISTO X 37.1W (CALLISTO X37)	2700K (278) 3000K (308) 4000K (408) 5700K (578)	5199lm 5524lm 5687lm 5524lm	4289lm 4484lm 4744lm -	3802lm 4062lm -					

* Available in 3500K, 5000K and 6500K upon request

**Available only for 31.3W version

Ordering Code Example:
CALLISTO X31-308-97-59-AD-BL-ND-11



- Callisto series of indoor tracklights consists of three models. Callisto D is the intermediate model.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- Available in White or Black Colour.
- Available accessories: honeycomb, antiglare ring and barn door.
- L90/B10 50.000h
- 3 SDCM




Honeycomb



Antiglare Ring



Barn Door




Model (LED Power)	CCT*	CR80 LED Source	CR90 LED Source	CR97 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)	90 (90)	97 (97)					
CALLISTO D 25.3W (CALLISTO D25)	2700K (278) 3000K (308) 4000K (408) 5700K (578)	3384lm 3593lm 3701lm 3595lm	2792lm 2910lm 3088lm -	2475lm 2644lm - -	16° (14) 25° (25) 39° (39) 53° (53)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut (Trailing Edge Dimmer) (PC) Local Dimming (LD)	Standard Honeycomb (01) (11) EXTRAS No Extras (10) Antiglare Ring Black (12) Antiglare Ring White (13) Barn Door Black (13) Barn Door White (14)
CALLISTO D 31.3W (CALLISTO D31)	2700K (278) 3000K (308) 4000K (408) 5700K (578)	4510lm 4792lm 4933lm 4792lm	3721lm 3890lm 4115lm -	3298lm 3524lm - -	23° (23) 31° (31) 41° (41) 53° (53)				
Warm Dimmable CALLISTO D 30.6W Warm Dimmable (CALLISTO D WD30)	Warm Dimmable 1800K-3000K (18308)	LED Source 2850lm	CR95 95 (95)		23° (23) 31° (31) 41° (41) 53° (53)			DALI (DL) Phase Cut (Trailing Edge Dimmer) (PC) Local Dimming (LD)	


* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example: CALLISTO D25-40B-90-25-AD-BL-ND-11

CALLISTO D 25.3W



CALLISTO D 31.3W



- Callisto series of indoor tracklights consists of three models. Callisto N is the smallest model.
- Adjustable 350° on the horizontal plane & 90° on the vertical plane.
- Available in White or Black Colour.
- Available accessories: honeycomb, antiglare ring and barn door.
- L90/B10 50.000h
- 3 SDCM




Honeycomb



Antiglare Ring




Barn Door



Model (LED Power)	CCT*	CR80 LED Source	CR90 LED Source	CR97 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)	90 (90)	97 (97)					
CALLISTO N 17.5W (CALLISTO N18)	2700K (27B) 3000K (30B) 4000K (40B) 5700K (57B)	2482lm 2637lm 2714lm 2637lm	2048lm 2140lm 2265lm -	1815lm 1939lm - -	17° (17) 28° (28) 42° (42) 58° (58)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut (Trailing Edge Dimmer) (PC) Local Dimming (LD)	Standard Honeycomb (01) (11) (XX) EXTRAS No Extras (00) Antiglare Ring Black (11) Antiglare Ring White (12) Barn Door Black (13) Barn Door White (14)
CALLISTO N 25.3W (CALLISTO N25)	2700K (27B) 3000K (30B) 4000K (40B) 5700K (57B)	3384lm 3595lm 3701lm 2637lm	2792lm 2919lm 3088lm -	2475lm 2644lm - -					
Warm Dimmable CALLISTO N 16.5W Warm Dimmable (CALLISTO N WD17)	Warm Dimmable 1800K~3000K (1830B)	LED Source 1520lm	CR95 95 (95)					DALI (DL) Phase Cut (Trailing Edge Dimmer) (PC) Local Dimming (LD)	

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example: CALLISTO N18-27B-90-42-AD-WH-ND-02





ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str. N.Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr



o12 Showroom, Athens, Greece
Architect: Nikos Gkots

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 66 Antiochias St, N. Philadelpchia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

- Riena series of indoor tracklights consists of three models. Riena X is the largest model.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Available in White or Black Colour.
- Available accessories: honeycomb, antiglare ring and barn door.
- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT*	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)	90 (90)					
RIENA X 24.6W (RIENA X25)	2700K (27B)	3380lm	2780lm	18° (18)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut (PC) (fading Edge Dimmer) Local Dimming (LD)	Standard (00) Antiglare Ring Black (01) Antiglare Ring White (02) Barn Door Black (03) Barn Door White (04)
	3000K (30B)	3590lm	2910lm	25° (25)				
	4000K (40B)	3690lm	3080lm	34° (34)				
	5700K (57B)	3590lm	-					
RIENA X 31.6W (RIENA X32)	2700K (27B)	4340lm	3580lm					
	3000K (30B)	4610lm	3740lm					
	4000K (40B)	4750lm	3960lm					
	5700K (57B)	4610lm	-					

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example: RIENA X25-40B-80-34-AD-WH-PC-04



- Riena series of indoor tracklights consists of three models. Riena D is the intermediate model.
- Adjustable: 340° on the horizontal plane & 90° on the vertical plane.
- Available in White or Black Colour
- Available accessories: honeycomb, antiglare ring and barn door.
- L90/B10 50,000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT*	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)	90 (90)					
RIENA D 16.2W (RIENA D16)	2700K (27B)	2190lm	1810lm	18° (18)	Adjustable (AD)	White (WH)	Non-Dimmable (ND)	Standard (00)
	3000K (30B)	2330lm	1850lm	25° (25)		Black (BL)	DALI (DL)	Antiglare Ring Black (01)
	4000K (40B)	2400lm	2000lm	32° (32)			Phase Cut (trailing Edge Dimmer) (PC)	Antiglare Ring White (02)
	5700K (57B)	2330lm	-				Local Dimming (LD)	Barn Door Black (03)
RIENA D 22.6W (RIENA D23)	2700K (27B)	3070lm	2530lm					Barn Door White (04)
	3000K (30B)	3260lm	2640lm					
	4000K (40B)	3360lm	2800lm					
	5700K (57B)	3260lm	-					

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example: RIENA D23-40B-80-32-AD-WH-PC-04



- Riena series of indoor tracklights consists of three models. Riena N is the smallest model.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Available in White or Black Colour.
- Available accessories: honeycomb, antiglare ring and barn door.
- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT*	CR180 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option	Accessories
		80 (80)	90 (90)					
RIENA N 12.8W (RIENA N13)	2700K (27B)	1680lm	980lm	18° (18)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND)	Standard (00)
	3000K (30B)	1780lm	1450lm	25° (25)			DAI (DL)	Antiglare Ring Black (01)
	4000K (40B)	1840lm	1530lm	32° (32)			Phase Cut (PC) (Fading Edge Dimmer)	Antiglare Ring White (02)
	5700K (57B)	1780lm	-				Local Dimming (LD)	Barn Door Black (03) Barn Door White (04)
RIENA N 16.2W (RIENA N16)	2700K (27B)	2190lm	1810lm					
	3000K (30B)	2330lm	1850lm					
	4000K (40B)	2400lm	2000lm					
	5700K (57B)	2330lm	-					

* Available in 3500K, 5000K, and 6500K upon request.

Ordering Code Example: **RIENA N16-40B-80-32-AD-WH-PC-04**





ai2 Booth, Salone del Mobile, Milano
Architect: Nikos Gelas

ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias St, N.Philadephia, 14341 Athens, Greece, info@electron.gr, www.electron.gr

FERIA ZOOM X

Interior Spotlights 

- FERIA series of tracklights consists of four models. FERIA Zoom X is the largest model.
- It is ideal for museum lighting.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Adjustable beam angle: 18° (min) – 65° (max)
- Available in White or Black Colour.
- Available accessory: barn door
- 3 circuit track adaptor.
- L90/B10 50,000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT*	CRI90 LED Source	CRI90 LED Source	Beam Angle	Type	Colour	Dimming Option
		80 (80)	90 (90)				
FERIA ZOOM X 32.3W (FERIA ZOOM X32)	2700K (2/78) 3000K (3/08) 4000K (4/08) 5700K (5/78)	4485lm 4766lm 4906lm 4766lm	3701lm 3868lm 4092lm -	Adjustable (18-65) 18°(min)-65°(max)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut** (PC) Trailing Edge Dimmer Local Dimming** (LD)
FERIA ZOOM X 38.3W (FERIA ZOOM X38)	2700K (2/78) 3000K (3/08) 4000K (4/08) 5700K (5/78)	5133lm 5455lm 5615lm 5455lm	4236lm 4428lm 4684lm -				

* Available in 3500K, 5000K and 6500K upon request
** Available only for 32.3W version

Ordering Code Example: FERIA ZOOM X32-408-80-18-65-AD-BL-ND



Adjustable beam angle



- FERIA series of tracklights consists of four models. FERIA Zoom D is the intermediate model.
- It is ideal for museum lighting.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Adjustable beam angle: 22° (min) – 60° (max)
- Available in White or Black Colour.
- Available accessory: barn door
- 3 circuit track adaptor.
- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT*	CR80 LED Source	CR90 LED Source	CR97 LED Source	Beam Angle	Type	Colour	Dimming Option
		80 (80)	90 (90)	97 (97)				
FERIA ZOOM D 25.3W (FERIA ZOOM D25)	2700K (27B) 3000K (30B) 4000K (40B) 5700K (57B)	3384lm 3595lm 3701lm 3595lm	2792lm 2919lm 3088lm -	2475lm 2644lm -	Adjustable (2260) 22° (min)-60° (max)	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut (Trailing Edge Dimmer) (PC) Local Dimming (LD)
FERIA ZOOM D 32.3W (FERIA ZOOM D32)	2700K (27B) 3000K (30B) 4000K (40B) 5700K (57B)	4485lm 4766lm 4906lm 4766lm	3701lm 3868lm 4092lm -	- -				

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example: FERIA ZOOM D25-40B-90-2260-AD-BL-ND



Barn Door

Adjustable beam angle



FERIA ZOOM N

Interior Spotlights 

- FERIA series of tracklights consists of four models. FERIA Zoom N is the smallest model.
- It is ideal for museum lighting.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Adjustable beam angle: 17° (min) – 58° (max)
- Available in White or Black Colour.
- Available accessory: barn door
- 3 circuit track adaptor.
- L90/B10 50.000h
- 3 SDCM





LIGHTSOURCE BY
bridgelux.

Model (LED Power)	CCT*	CR80 LED Source	CR190 LED Source	Beam Angle	Type	Colour	Dimming Option
		80 (80)	90 (90)				
FERIA ZOOM N 17.7W (FERIA ZOOM N18)	2700K (27B)	2302lm	1899lm	Adjustable (1758)	Adjustable (AD)	White (WH)	Non-Dimmable (ND)
	3000K (30B)	2445lm	1985lm	17°(min)-58°(max)		Black (BL)	DAI (DL)
	4000K (40B)	2518lm	2100lm				Phase Cut (Trailing Edge Dimmer) (PC)
	5700K (57B)	2445lm	-				Local Dimming (LD)

* Available in 3500K, 5000K and 6500K upon request

Ordering Code Example: FERIA ZOOM N18-40B-90-1758-AD-BL-ND



Barn Door



Adjustable beam angle

- Feria series of tracklights consists of four models. Feria F is the last model.
- It is ideal for museum lighting.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Adjustable beam angle: 6° (min) - 60° (max)
- Available in White or Black Colour.
- Available accessory: barn door
- 3 circuit track adaptor.
- L90/B10 50.000h
- 3 SDCM




LIGHTSOURCE BY
bridgelux

Model (LED Power)	CCT*	CRI90 Beam Angle LED Source		CRI90 Beam Angle LED Source		CRI97 Beam Angle LED Source		Type	Colour	Dimming Option
		80 (80)	90 (90)	90 (90)	90 (90)	97 (97)	97 (97)			
FERIA F 17.7W (FERIA F18)	2700K (278)	6°	60°	6°	60°	6°	60°	Adjustable (AD)	White (WH) Black (BL)	Non-Dimmable (ND) DALI (DL) Phase Cut (Trailing Edge Dimmer) (PC) Local Dimming (LD)
	3000K (308)	460lm~1059lm	380lm~874lm	320lm~916lm	341lm~978lm	-	-			
	4000K (408)	489lm~1125lm	397lm~913lm	420lm~966lm	-	-	-			
	5700K (578)	504lm~1158lm	420lm~966lm	-	-	-	-			
	5700K (578)	489lm~1125lm	-	-	-	-	-			
FERIA F 25.3W (FERIA F25)	2700K (278)	8°	65°	8°	65°	8°	65°			
	3000K (308)	575lm~1692lm	475lm~1396lm	421lm~1238lm	449lm~1322lm	-	-			
	4000K (408)	611lm~1798lm	496lm~1460lm	449lm~1322lm	-	-	-			
	5700K (578)	629lm~1851lm	525lm~1544lm	-	-	-	-			
	5700K (578)	611lm~1798lm	-	-	-	-	-			

* Available in 3500K, 5000K and 6500K upon request.

Ordering Code Example: FERIA F25-308-90-AD-WH-DL



Adjustable beam angle



60°max (17.7W) 6°min (17.7W)
65°max (25.3W) 8°min (25.3W)

ADORNO TRACK Retrofit

Interior Spotlights 


- Adorno is an elegant tracklight suitable for GU10 LED lamps.
- Max 7,5 Watt (lamp not included).
- Housing: Powder coated aluminium.
- Adjustable 340° on the horizontal plane & 90° on the vertical plane.
- Available in white or black colour for the outer housing and in white, black or gold for the inner housing.
- Available with accessories: : honeycomb, linear spread lens, softening lens, spread lens.
- 3 circuit track adaptor



Model	Outer Colour - Inner Colour	Type	Lamp Holder	Accessories
ADORNO TRACK Retrofit (ADORNO TRR)	White-Black (WB) White-White (WW) White-Gold (WG) Black-Black (BB) Black-White (BW) Black-Gold (BG)	Adjustable (AD)	GU10 (G1) (max 7.5W)	Standard (0) Honeycomb (1) Linear Spread (2) Softening Lens (3) Spread Lens (4)



Ordering Code Example:
ADORNO TRR-WB-AD-G1-1




- Rio L is a tracklight with long bracket and square form suitable for GU10 LED lamps.
- Max 50 Watt (lamp not included).
- Adjustable 340° on the horizontal plane & ±90° on the vertical plane.
- Available only in White Colour.
- 3 circuit track adaptor.



Model	Colour	Type	Lamp Holder	Accessories
RIO L Square (RIO L SQ)	White (WH)	Adjustable (AD)	GU10 (G1) (max 50W)	Standard (S)




Ordering Code Example:
RIO L SQ-WH-AD-G1-S

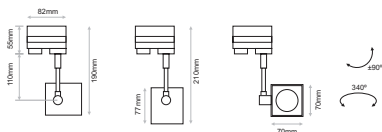

MANDI SYSTEM

Interior Spotlights 

- MANDI is a timeless system creating horizontal and vertical lines.
- MANDI luminaire is available in White or Black Colour.
- MANDI System accessories include: Corner, Internal & External set 90D, Corner U type, Extension Line, 90D Corner Extension.
- Installation box is not included.
- 3 circuit track adaptor.
- L90/B10 50.000h
- 3 SDCM




LIGHTSOURCE BY
bridgelux.



Model (LED Power)	CCT*	LED Source			Type	CRI	Beam Angle	Colour	Dimming Option	Accessories
		CR80	CR90	CR97						
MANDI 12.2W (MANDI 12)	2700K (278)	1575lm	1313lm	-	Adjustable (AD)	80 (80)	20° (20)	White (WH)	Without Driver (D0)	Standard Diffuser (D1) Honeycomb (D2)  EXTRAS No Extras (E0) Emergency Kit (E1)
	3000K (308)	1657lm	1362lm	-		90 (90)	30° (30)	Black (BL)	Non-Dimmable (ND)	
	4000K (408)	1706lm	1460lm	-		97 (97)			Analogue (1-10V) (A1)	
	5700K (578)	1788lm	-	-					DIMX (DX) DALI (DL) Push Button (PB) Phase Cut (PC) Wireless ** (WL)	
MANDI 12.5W (MANDI 12)	2700K (278)	-	-	1121lm						
	3000K (308)	-	-	1196lm						
MANDI 17.1W (MANDI 17)	2700K (278)	2382lm	1985lm	-						
	3000K (308)	2481lm	2060lm	-						
	4000K (408)	2581lm	2209lm	-						
	5700K (578)	2705lm	-	-						
MANDI 17.5W (MANDI 17)	2700K (278)	-	-	1660lm						
	3000K (308)	-	-	1783lm						

* Available in 3500K, 5000K and 6500K upon request


** The wireless dimming option includes driver and Bluetooth dimming accessory.

Ordering Code Example: MANDI 17-30B-AD-80-30-BL-ND-00






MANDI Aluminium Profile



Extension Line



90° Corner Extension

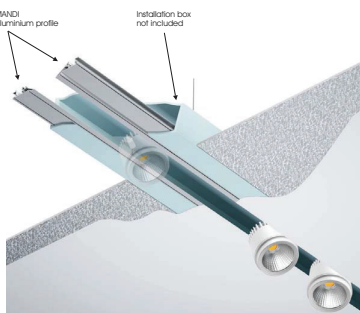



ELECTRON SA, PROFESSIONAL LIGHTING SYSTEMS - 68 Antiochias Str, N.Philadelphia, 14341 Athens, Greece, info@electron.gr, www.electron.gr